



BA6220

LINEAR INTEGRATED CIRCUIT

GENERAL USE ELECTRONIC GOVERNOR

DESCRIPTION

The UTC **BA6220** is a monolithic integrated circuit, developed for speed control of general use DC motors.

FEATURES


- * Wide range of working power supply voltage range ($V_{CC} = 3.5V - 16V$).
- * Very large starting torque at the low voltage.
- * Large permissible loss due to effective utilization of substrate radiation.
- * Usable for various DC motors by means of changing constants of the external components.

APPLICATION

- * Radio cassette tape recorders

ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
BA6220-D08-T	BA6220L-D08-T	DIP-8	Tube
BA6220-S08-R	BA6220L-S08-R	SOP-8	Tape Reel
BA6220-S08-T	BA6220L-S08-T	SOP-8	Tube

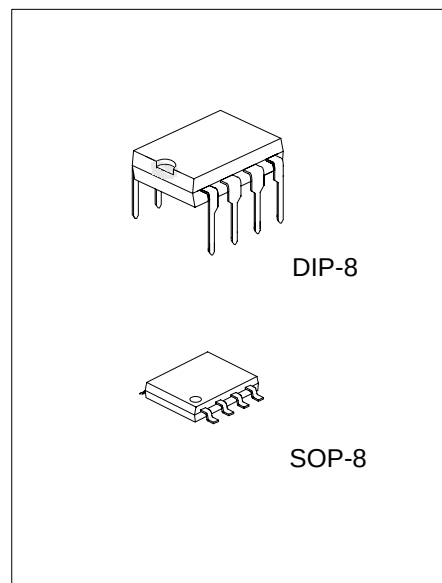

*Pb-free plating product number: BA6220L

BA6220L-D08-T (1)Packing Type (2)Package Type (3)Lead Plating		(1) T: Tube, R: Tape Reel (2) D08: DIP-8, S08: SOP-8 (3) L: Lead Free Plating, Blank: Pb/Sn
---	--	--

■ BLOCK DIAGRAM

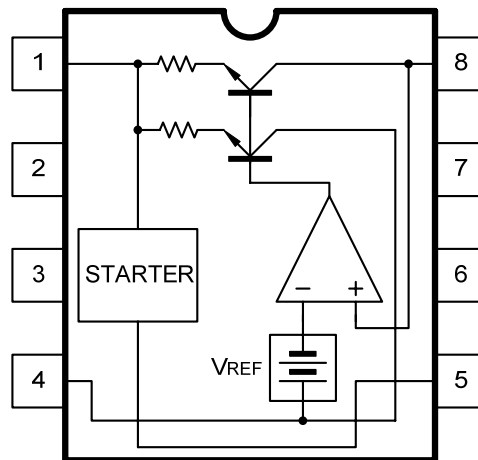

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	18	V
Power Dissipation(note 1)	DIP-8	1.4	W
	SOP-8	0.8	W
Operating Temperature	T _{OPR}	-25 ~ +75	°C
Storage Temperature	T _{STG}	-55 ~ +125	°C

Note 1. PCB (Copper-surfaced) 9cm², T 1.0mm.

2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Operating Supply Voltage	V _{CC}	Loader: 8g-cm	3.5		16	V


■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V_{CC}=12V)

PARAMETER	SYMBOL	TEST CIRCUIT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Saturate Voltage	V _{SAT}	Fig.3	V _{CC} =4.2V, R _M =4.4Ω		1.5	2.0	V
Reference Voltage	V _{REF}	Fig.1	I _M =10mA	1.10	1.27	1.40	V
Current Ratio	K	Fig.2	R _M =33 - 44Ω	18	20	22	
Volatge Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta V_{CC}$	Fig.1	I _M =100mA, V _{CC} =6.3 - 16V		0.06		%/V
Volatge Feature of Current Ratio	$\Delta K/K/\Delta V_{CC}$	Fig.2	I _M =100mA, V _{CC} =6.3 - 16V		0.4		%/V
Bias Current	I _{BIAS}	Fig.4	R _M =180Ω	0.5	0.8	1.2	mA
Current Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta I_M$	Fig.1	I _M =30 - 200mA		-0.02		%/mA
Current Feature of Current Ratio	$\Delta K/K/\Delta I_M$	Fig.2	I _M =30 - 200mA		-0.02		%/mA
Temperature Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta T_a$	Fig.1	I _M =100mA, Ta=-25 - 75°C		0.01		%/°C
Temperature Feature of Current ratio	$\Delta K/K/\Delta T_a$	Fig.2	I _M =100mA, Ta=-25 - 75°C		0.01		%/°C


■ APPLICATION CIRCUIT

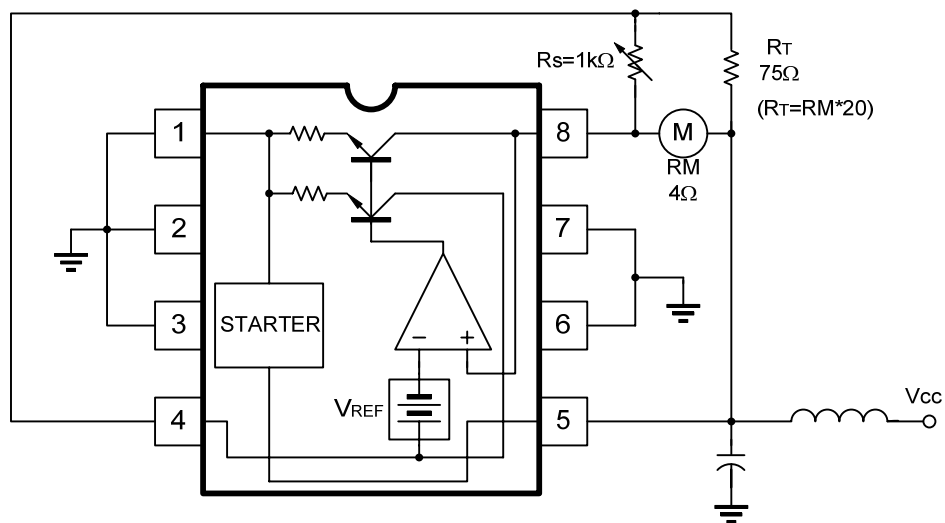


■ TEST CIRCUIT




(1)

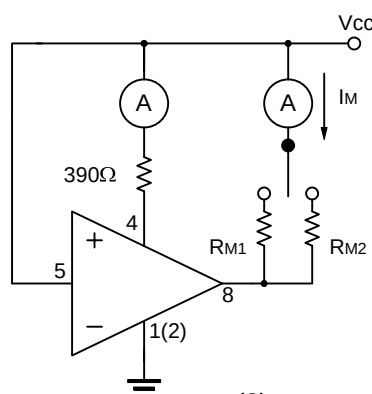

(2)



(3)

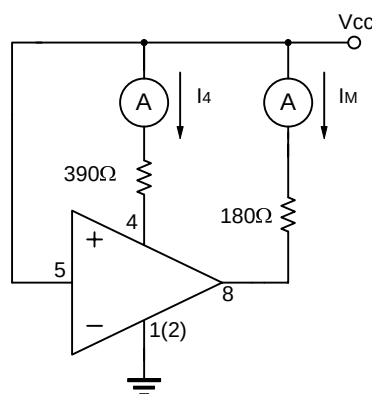

(4)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.