

AVNET EMBEDDED SPECIFICATION.

Datasheet
URT
UMSH-8065MD-11T

SPECIFICATION

OF

LIQUID CRYSTAL DISPLAY MODULE



CUSTOMER : URT-STD

Model No. : UMSH-8065MD-11T

Model version : 1

Document Revision : 10

CUSTOMER APPROVED SIGNATURE			

This specification need to be signed by purchaser or customer as a specification of products production and delivery from URT. Without signature of this specification , any purchase order for this model no. will be treated and considered that this specification is automatically acknowledged and accepted by purchaser or customer.

 **U.R.T.**  **UNITED RADIANT TECHNOLOGY CORPORATION**

Allen Wang
APPROVED

George Tseng
CHECKED

Angus Chiu
CHECKED

Sharon Tsai
PREPARED

Mar-31-2008
Date

COMPANY : No. 2,Fu-hsing Road,Taichung Economic Processing Zone,Tantzu,Taichung,Taiwan,R.O.C.

TEL: 886-4-25314277

FAX: 886-4-25313067



Revision 10 ; UMSH-8065MD-11T Ver. 1 ; March-31-2008

Page: 1

This document has been signed by Digital Signature Approval System

Revision record			
Document Revision	Model No. Version No.	Description	Revision by
0	UMSH-8065MD-T Version No. 0		Tony Chan Jeffry Chen 18-Jul-2007
1	UMSH-8065MD-1T Version No. 0	1.Modify the FPC interface pins.	H.C. Lin Jeffry Chen
2	UMSH-8065MD-2T Version No. 0	1. Add AD board on LCM. 2. Modify the module number from UMSH-8065MD-1T to UMSH-8065MD-2T.	H.C. Lin Jeffry Chen
3	UMSH-8065MD-3T Version No. 0	1. Add touch panel on LCM. 2. Modify the module number from UMSH-8065MD-1T to UMSH-8065MD-3T.	H.C. Lin Jeffry Chen
4	UMSH-8065MD-4T Version No. 0	1. Change to car-using specification. 2. Modify the module number from UMSH-8065MD-1T to UMSH-8065MD-4T.	H.C. Lin Jeffry Chen
5	UMSH-8065MD-5T Version No. 0	1. Modify the module number from UMSH-8065MD-4T to UMSH-8065MD-5T. 2.Add touch panel on LCM.	H.C. Lin Jeffry Chen
6	UMSH-8065MD-6T Version No. 0	1.Add touch panel on LCM.	Tony Chan Jeffry Chen 25-Jul-2007
7	UMSH-8065MD-7T Version No. 0	1. Improve display performance. 2. Modify the module number from UMSH-8065MD-T to UMSH-8065MD-7T.	H.C. Lin Jeffry Chen
8	UMSH-8065MD-8T Version No. 0	1.Modify the module number from UMSH-8065MD-T to UMSH-8065MD-8T. 2.Change to car-using specification.	H.C. Lin Jeffry Chen 21-Sep-2007
9	UMSH-8065MD-11T Version No. 0	1.Modify the module number from UMSH-8065MD-T to UMSH-8065MD11T. 2.Modify the LED backlight to high brightness(500cd/	H.C. Lin Jeffry Chen
10	UMSH-8065MD-11T Version No. 1	1. Modify the specification of DC Characteristics. 2. Modify the description of interface pin. 3. Modify the Back-light only Specification	H.C. Lin Jeffry Chen 31-Mar-2008
		Revision 10 ; UMSH-8065MD-11T Ver. 1 ; March-31-2008	Page: 2

CONTENTS:

No.	Item	Page
1	BASIC SPECIFICATION 1.1 Mechanical Specification 1.2 Display Specification 1.3 Outline Dimension 1.4 Block Diagram 1.5 Interface Pin	4 4 5 6 7~9
2	ELECTRICAL CHARACTERISTICS 2.1 Absolute Maximum Ratings 2.2 DC Characteristics 2.2.1 Back-light 2.3 Command 2.4 AC Characteristics	10 11 11 12 13~24
3	OPTICAL CHARACTERISTICS 3.1 Condition 3.2 Definition of Optical Characteristics	25 26~27
4	RELIABILITY	28
5	PRODUCT HANDING AND APPLICATION	29
6	DATECODE	30
7	PACKING & LOTNO	31~32
8	INSPECTION STANDARD	33~36

1. BASIC SPECIFICATION

1.1 Mechanical specifications

Items	Nominal Dimension	Unit
Active screen size	3.5" diagonal	-
Dot Matrix	320*RGB*240	dots
Module Size (W x H x T)	76.9 x 63.9 x 3.2	mm.
Active Area (W x H)	70.08 x 52.56	mm.
Dot Pitch (W x H)	0.219 x 0.219	mm.
Color depth	262K	color
Interface	8-bits serial/24-bits parallel RGB / CCIR601/656	-
Driving IC Package	COG	-


* The maximum color depth of this driver IC is 262K colors ,not 16.7M.

1.2 Display specification

Display	Descriptions	Note
LCD Type	a-Si TFT	-
LCD Mode	TN/Normally White	-
Polarizer Mode	Transmissive	-
Polarizer Surface	Normal	-
Pixel arrangement	RGB-stripe	-
Backlight Type	LED	-
Viewing Direction	6 O'clock Direction	-


Color tone is slightly changed by temperature and driving voltage.

1.3 Outline dimension

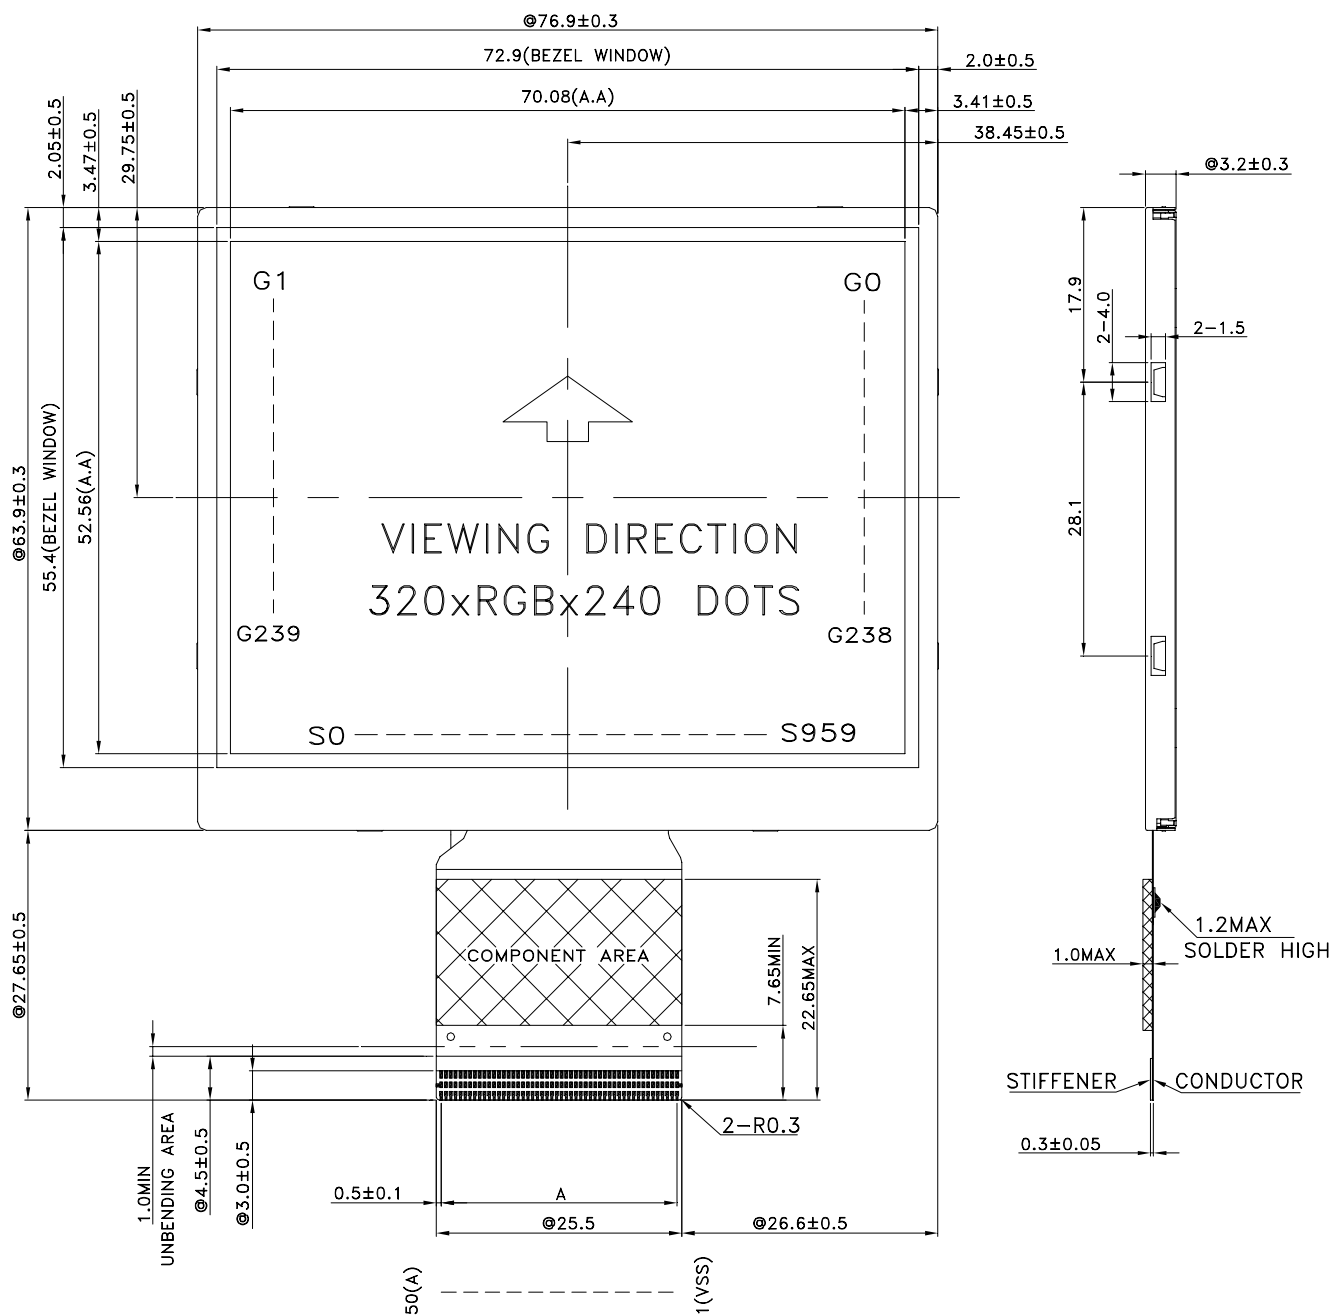


NOTE :

1. LCD:TFT TRANSMISSIVE MODE,NORMAL WHITE
2. VIEWING DIRECTION : 6 O'CLOCK
3. Top : -20~70°C , Tst : -30~80°C
4. DRIVER IC : HX8238-A
5. "Ø"KEY DIMENSION.
6. TOLERANCE FOR NOT ASSIGNED:±0.2
7. LED COLOR : WHITE , 10 PCS DICE
CONSTANT CURRENT IF=40.0mA ; VLED=17.0V(Typ)
8. A:24.5±0.05(p0.5x49) , W=0.3±0.05
9. THE MINIMUM BENDING RADIUS (INNER) OF THE FPC IS 0.5mm.
- 10.THE LUMINANCE OF LCM: 500 cd/m² (MIN), 700 cd/m² (TYP)

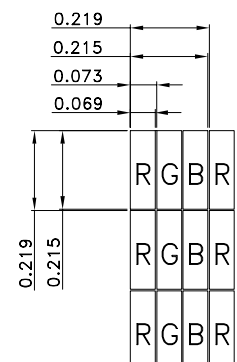

DOTS DETAIL

1.4 Block diagram:

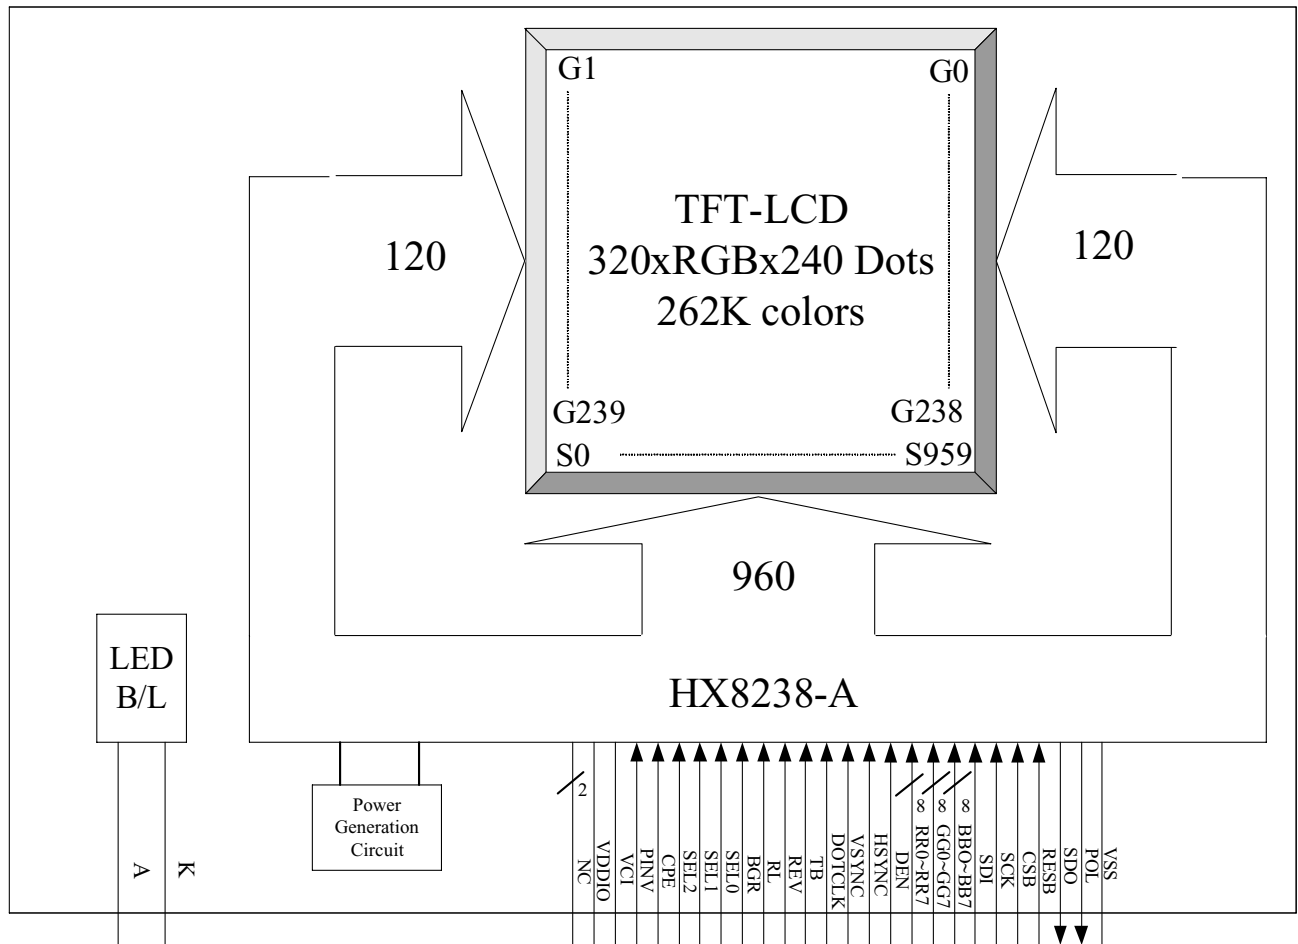

1.5 Interface pin :

Pin No.	Pin Name	I/O	Description
1	VSS	P	System ground pin of the IC. - Connect to system ground
2	POL	O	Polarity signal to monitor VCOM signal. - Leave it OPEN when not used
3	SDO	O	Data output pin in serial mode. - Leave it OPEN when not used
4	RESB	I	System reset pin. Internal pull high.
5	CSB	I	Chip select pin of serial interface. Internal pull high. - Leave it OPEN when not used.
6	SCK	I	Clock pin of serial interface. Internal pull high. - Leave it OPEN when not used
7	SDI	I	Data input pin in serial mode. Internal pull high. - Leave it OPEN when not used
8~31	BB [0: 7] GG [0: 7] RR [0: 7]	I	Graphic Data Input Pins. Internal pull low. - RR [0:7]: Red Data - 8-bits - GG [0:7]: Green Data - 8-bits - BB [0:7]: Blue Data - 8-bits For 8 bit interface, only RR[0:7] are used. For unused pins, please connect to VSS or floating.
32	DEN	I	Display enable pin from controller. Connect to VDDIO or floating if not used.
33	HSYNC	I	Line synchronization signal. Internal pull high. - Fixed to VDDIO or floating if not used
34	VSNC	I	Frame synchronization signal. Internal pull high. - Fixed to VDDIO or floating if not used.
35	DOTCLK	I	Dot-clock signal and oscillator source.

Pin No.	Pin Name	I/O	Description				
36	TB	I	Input pin to select the Gate driver scan direction. - Connect to VSS for Gate scan from G239 to G0 (reverse scan) - Connect to VDDIO for Gate scan from G0 to G239 (normal scan)				
37	REV	I	Input pin to select the display reversion. - Connect to VDDIO mapping data '0' to maximum pixel voltage for normally white panel - Connect to VSS for mapping data '0' to minimum pixel voltage for normally black panel				
38	RL	I	Input pin to select the Source driver data shift direction. - Connect to VDDIO for display first RGB data at S0-S2. - Connect to VSS for display first RGB data at S959-S957.				
39	BGR	I	Input pin to select the color mapping. - Connect to VDDIO for Blue-Green-Red mapping. - Connect to VSS for Red-Green-Blue mapping.				
40~42	SELO~2	I	Input pin to select input interface mode.				
			SEL2	SEL1	SELO	Format	Operating Frequency
			0	0	0	Parallel-RGB data format (only support stripe type color filter)	6.5MHz
			0	0	1	Serial-RGB data format	19.5MHz
			0	1	0	CCIR 656 data format (640RGB)	24.54MHz
			0	1	1	CCIR 656 data format (720RGB)	27MHz
			1	0	0	YUV mode A data format (Cr-Y-Cb-Y)	24.54MHz
			1	0	1	YUV mode A data format (Cr-Y-Cb-Y)	27MHz
			1	1	0	YUV mode B data format (Cb-Y-Cr-Y)	27MHz
			1	1	1	YUV mode B data format (Cb-Y-Cr-Y)	24.54MHz

Pin No.	Pin Name	I/O	Description
43	CPE	I	Input pin to enable internal charge pump circuit. Internal pull high. - Connect to VDDIO to enable internal charge pump. - Connect to VSS to disable internal charge pump
44	PINV	I	Control the polarity of POL signal. Internal pull low. - Connect to VDDIO, POL phase is reversed with internal VCOM signal. - Connect to VSS, POL phase is same with internal VCOM signal.
45	VCI	P	Power Supply for Analog Circuits.
46	VDDIO	P	Voltage input pin for I/O logic.
47	NC	-	No connection.
48	NC	-	No connection.
49	K	P	Backlight LED' s cathode.
50	A	P	Backlight LED' s anode.

2. ELECTRICAL CHARACTERISTICS

2.1 Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit
Input voltage	VCI	VSS-0.3	5.0	V
Supply Voltage	VDDIO	VSS-0.3	4.0	V
Operate temperature range	TOP	-20	70	°C
Storage temperature range	TST	-30	80	°C

2.2 DC Characteristics

Items	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	V _{CI}	2.5	3.3	3.6	V	
Power supply pin of IO pins	V _{DDIO}	1.4	3.3	3.6	V	
Current consumption	I _{VCI+VDDIO}	-	-	16	mA	NOTE
Dot Clock	DCK	-	7.5	10	MHz	
Serial Clock	X _{SCK}	-	19.5	30	MHz	

NOTE : The method to illuminate the LCD panel is using the 2-4-7 command under the measuring condition.

Measuring Condition :

Standard Value MAX.


T_a = 25°C

V_{CI} = 3.3V

V_{DDIO} = 3.3V

Dot Clock = 7.5MHz

Display Patten = Checkered pattern



0 gray black pattern

2-2.1 Back-light Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition	Note
Supply Current	I _f	-	-	40	mA	T _a =25°C	-
Supply Voltage	V _F	-	17	-	V	T _a =25°C	-
Brightness	Br	7500	-	-	cd/m ²	T _a =25°C	-
Half-Life Time	L _f	-	50000	-	hrs	-	1

Notel: The " Half-Life Time" is defined as the LED chip brightness decreases to 50% than original brightness, Based on T_a 25±2°C, 60±10% RH condition .

2.3 Command (Recommend by U.R.T.)

LCD_Initial_HX-8238:


COMMAND	CODE	DESCRIPTION
R02H	0200	LCD-Driving-Waveform Control
R03H	6364	Power control 1
R04H	0440	Input Data and Color Filter Control
R0DH	3221	Power Control 2
R0EH	3100	Power Control 3

Adjust the Gamma Curve:

COMMAND	CODE	DESCRIPTION
R30H	0000	Gamma Control 1
R31H	0407	Gamma Control 1
R32H	0202	Gamma Control 1
R33H	0000	Gamma Control 1
R34H	0505	Gamma Control 1
R36H	0707	Gamma Control 1
R37H	0000	Gamma Control 1
R3AH	0904	Gamma Control 2
R3BH	0904	Gamma Control 2

2-4 AC Characteristics

2-4-1 8-bits serial/24-bits parallel RGB

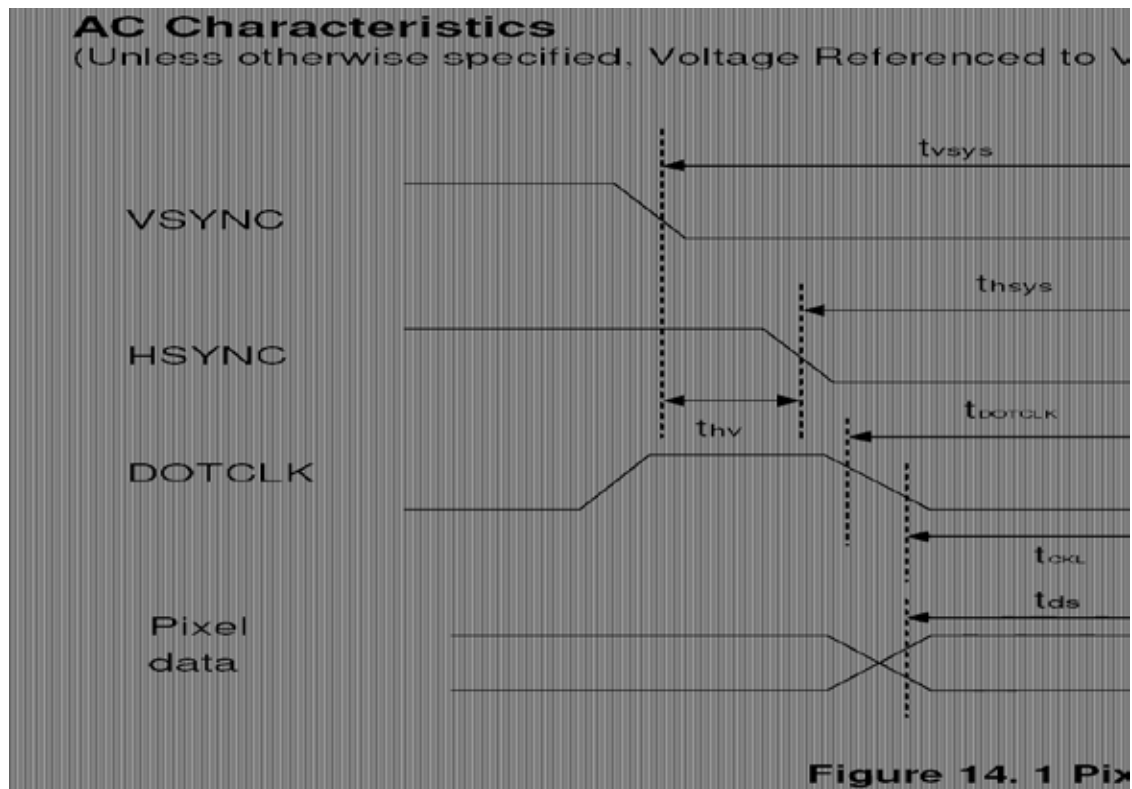

Characteristics	Symbol	Min.		Typ.		Max.		Unit
		24bit	8bit	24bit	8bit	24bit	8bit	
DOTCLK Frequency	fDOTCLK	-		7.5	19.5	10	30	MHz
DOTCLK Period	tDOTCLK	100	33.3	154	51.3	-	-	ns
Vertical Sync Setup Time	tvsys	20	10	-	-	-	-	ns
Vertical Sync Hold Time	tvsyh	20	10	-	-	-	-	ns
Horizontal Sync Setup Time	thsys	20	10	-	-	-	-	ns
Horizontal Sync Hold Time	thsyh	20	10	-	-	-	-	ns
Phase difference of Sync Signal Falling Edge	thv	1		-		240		tDOTCLK
DOTCLK Low Period	tCKL	50	15	-	-	-	-	ns
DOTCLK High Period	tCKH	50	15	-	-	-	-	ns
Data Setup Time	tds	12	8	-	-	-	-	ns
Data hold Time	tdh	12	8	-	-	-	-	ns
Reset pulse width	tRES	10		-		-		us

Note: External clock source must be provided to DOTCLK pin of HX8238-A. The driver will not operate if absent of the clocking signal.

Table 14. 1 Pixel Timing



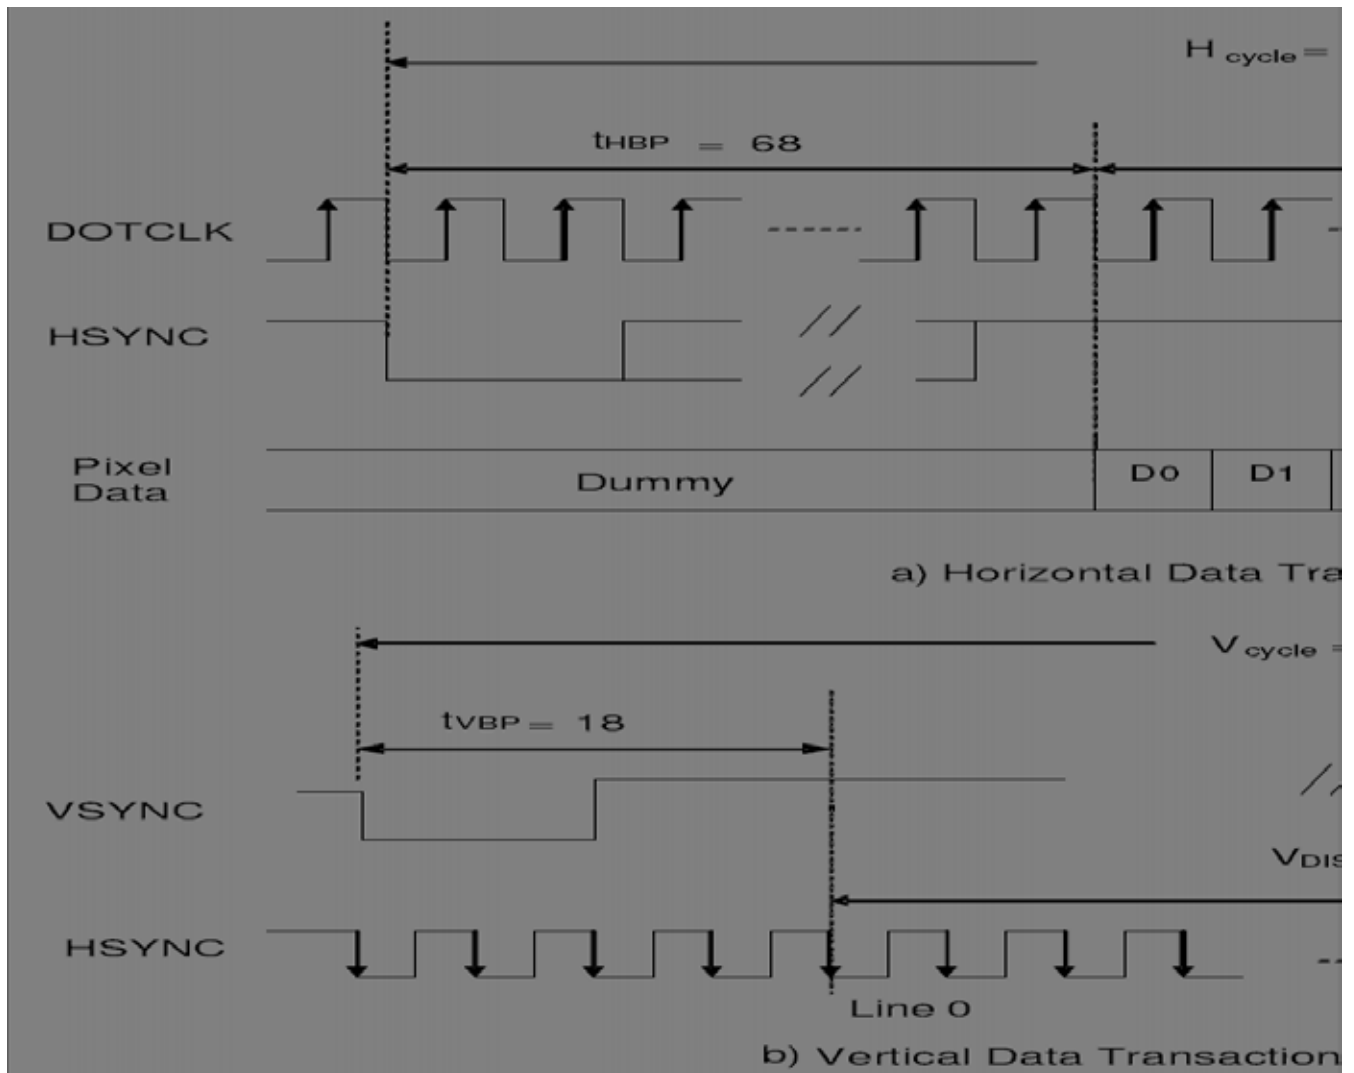


Figure 14. 2 Data transaction timing in pa

Characteristics		Symbol	Min		Typ		Max		Unit
			24bit	8 bit	24bit	8 bit	24bit	8 bit	
DOTCLK Frequency		fDOTCLK	-	-	7.5	19.5	10	30	MHz
DOTCLK Period		tDOTCLK	100	33.3	154	51.3	-	-	ns
Horizontal Frequency (Line)		fH	-		18.37		22.35		KHz
Vertical Frequency (Refresh)		fV	-		70		90		Hz
Horizontal Back Porch		tHBP	-	-	68	204	-	-	tDOTCLK
Horizontal Front Porch		tHFP	-	-	20	60	-	-	tDOTCLK
Horizontal Data Start Point		tHBP	-	-	68	204	-	-	tDOTCLK
Horizontal Blanking Period		tHBP + tHFP	-	-	88	264	-	-	tDOTCLK
Horizontal Display Area		HDISP	-	-	320	960	-	-	tDOTCLK
Horizontal Cycle		Hcycle	-	-	408	1224	450	1350	tDOTCLK
Vertical Back Porch		tVBP	-		18		-		Lines
Vertical Front Porch		tVFP	-		4		-		Lines
Vertical Data Start Point		tVBP	-		18		-		Lines
Vertical Blanking Period		tVBP + tVFP	-		22		-		Lines
Vertical Display Area	NTSC	V DISP	-		240		-		Lines
	PAL				280 (PALM=0)				
					288 (PALM=1)				
Vertical Cycle	NTSC	Vcycle	-		262		350		Lines
	PAL				313				

Table 14. 2 Data Transaction Timing in Normal Operating Mode

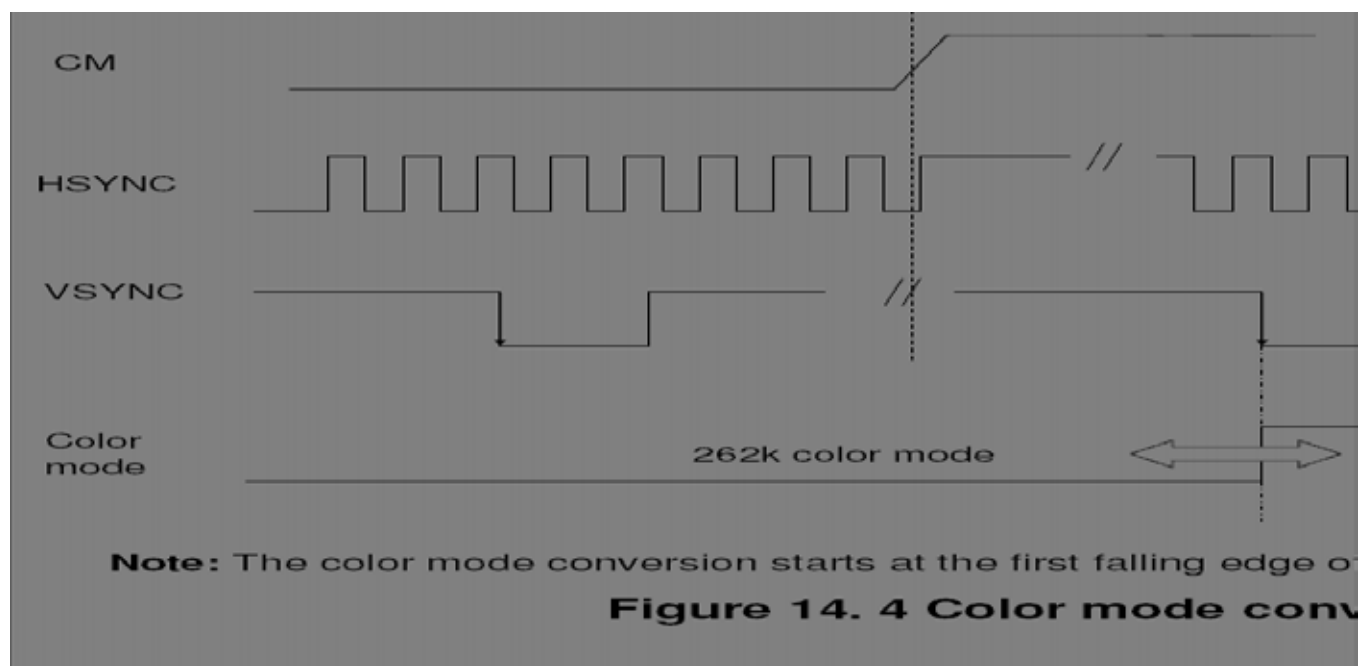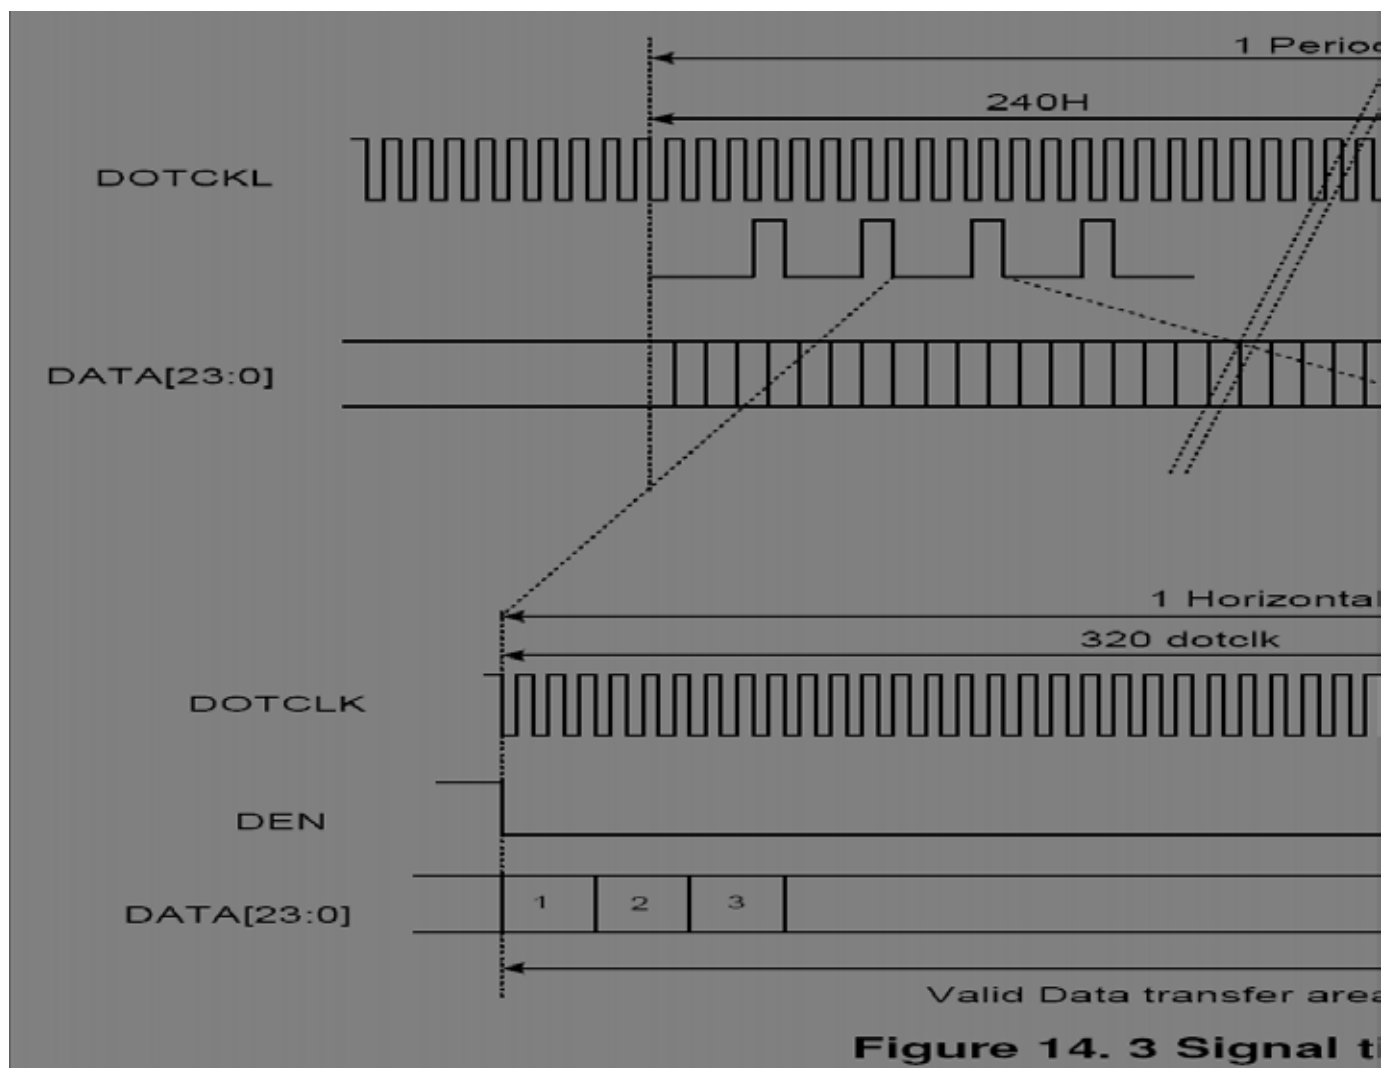

2-4-2 CCIR601 Timing

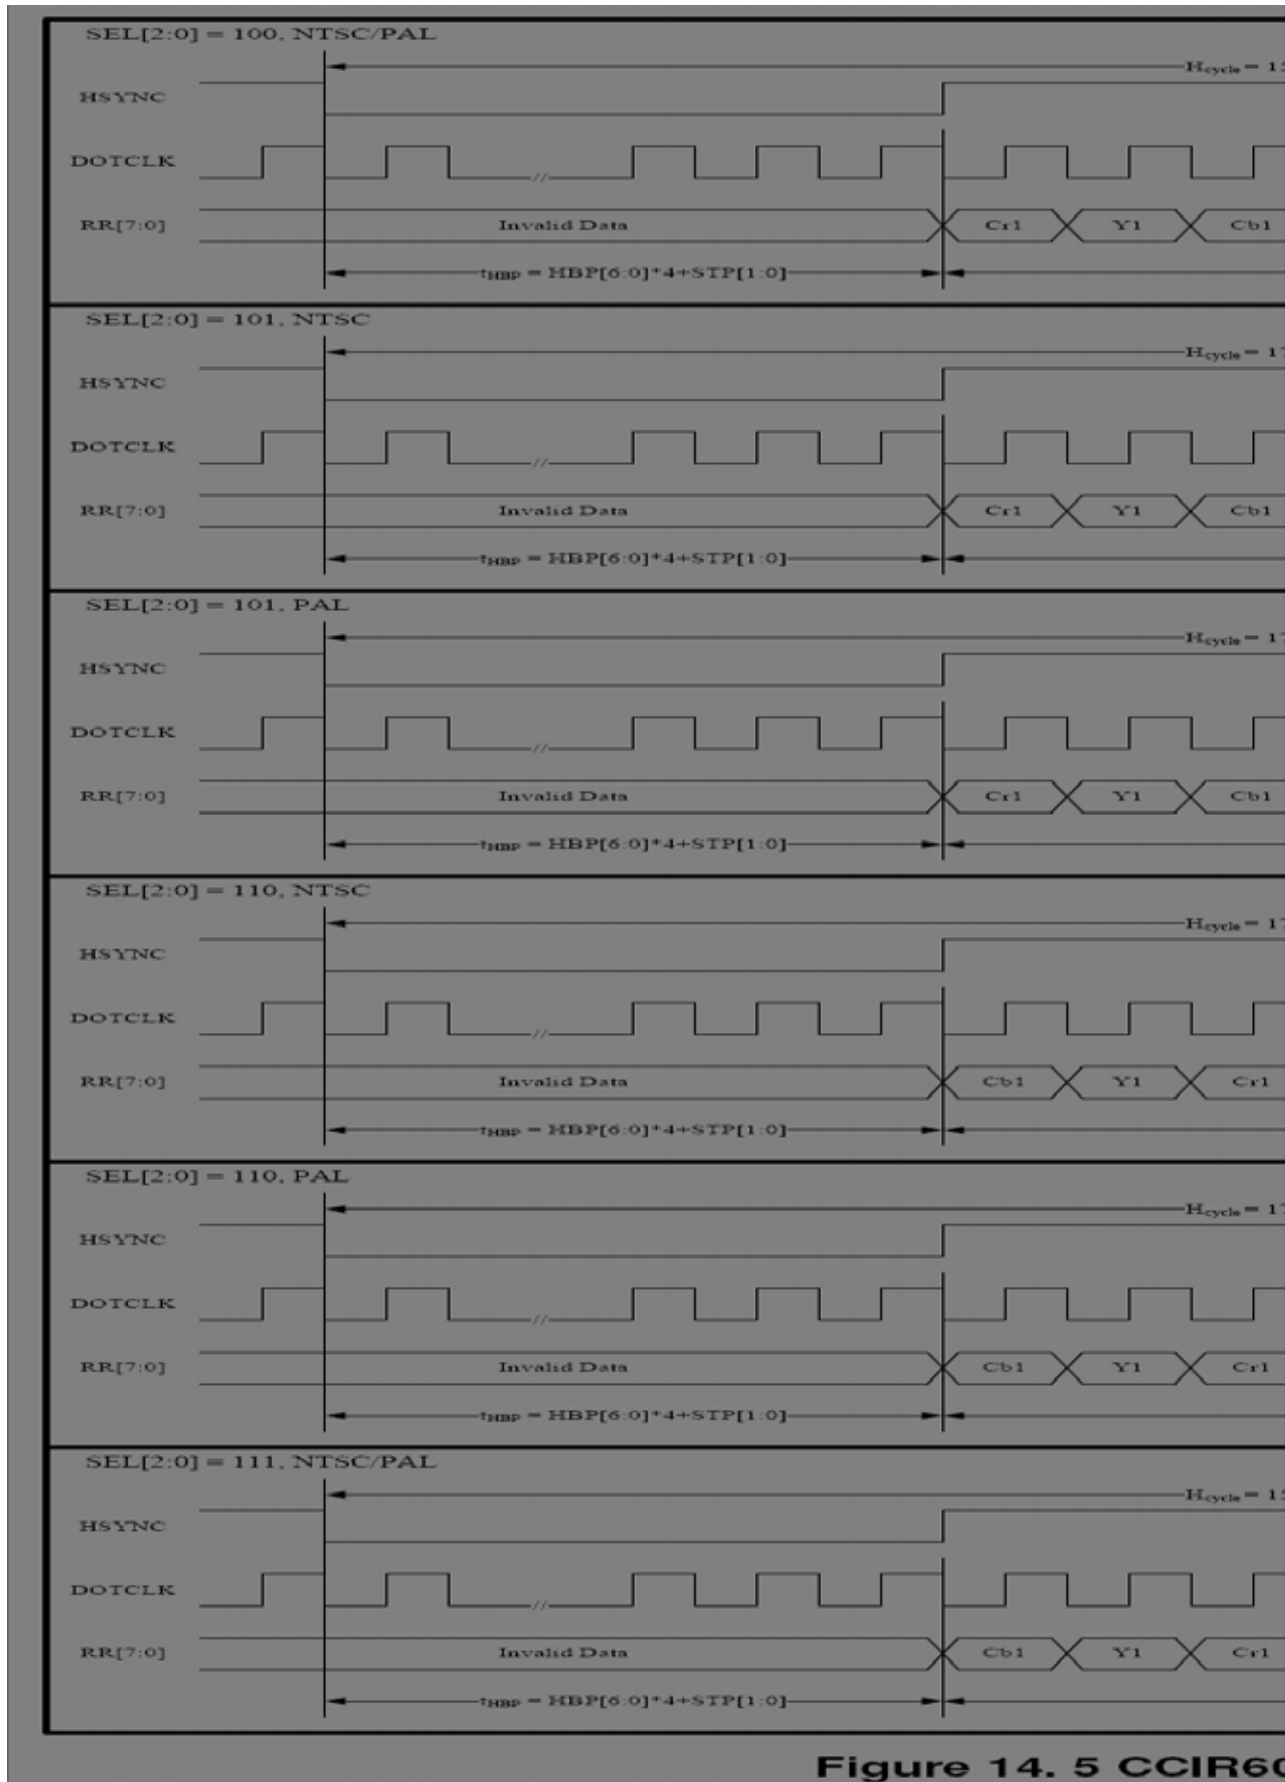


Figure 14. 5 CCIR601

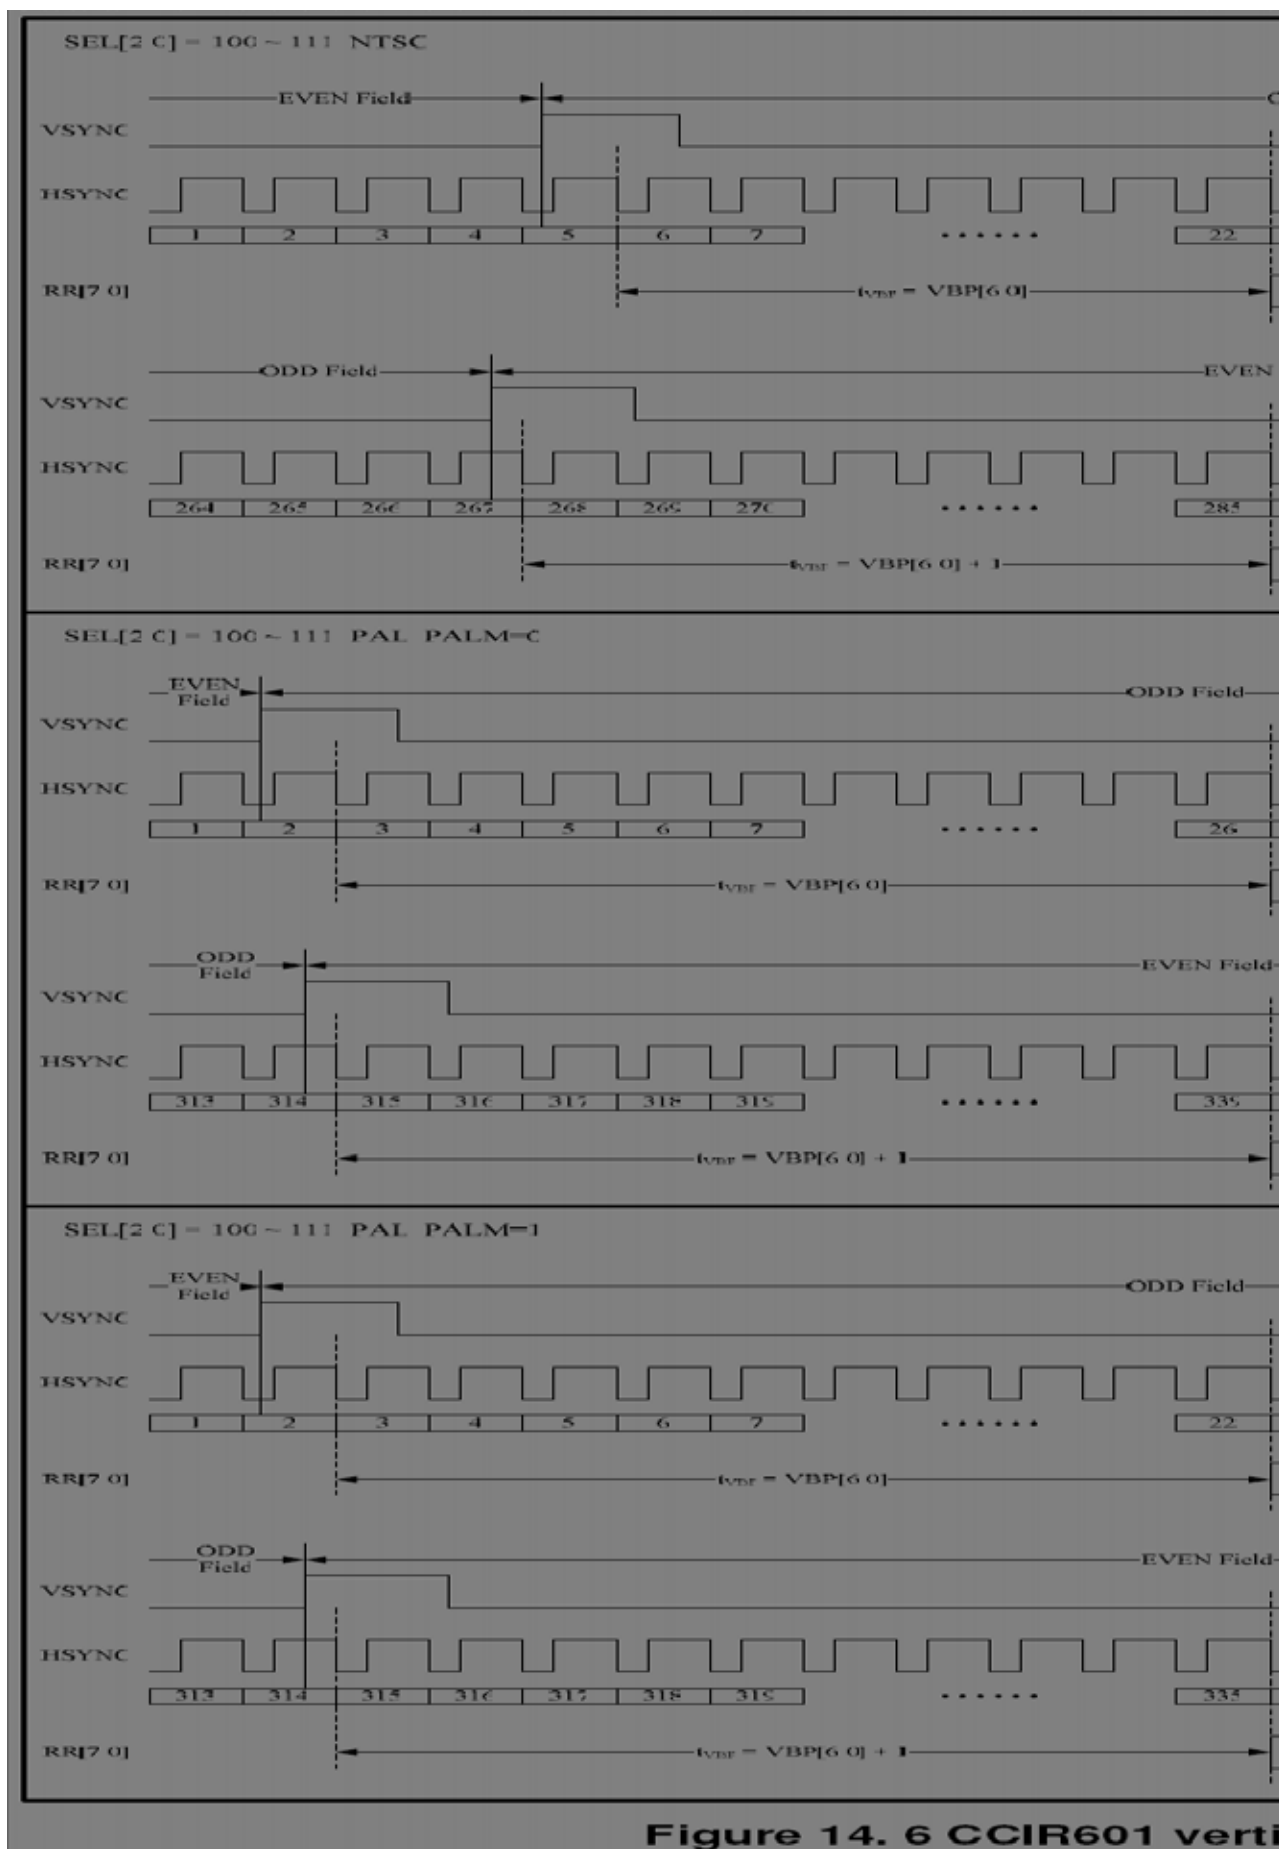


Figure 14. 6 CCIR601 verti

2-4-3 CCIR656 Timing

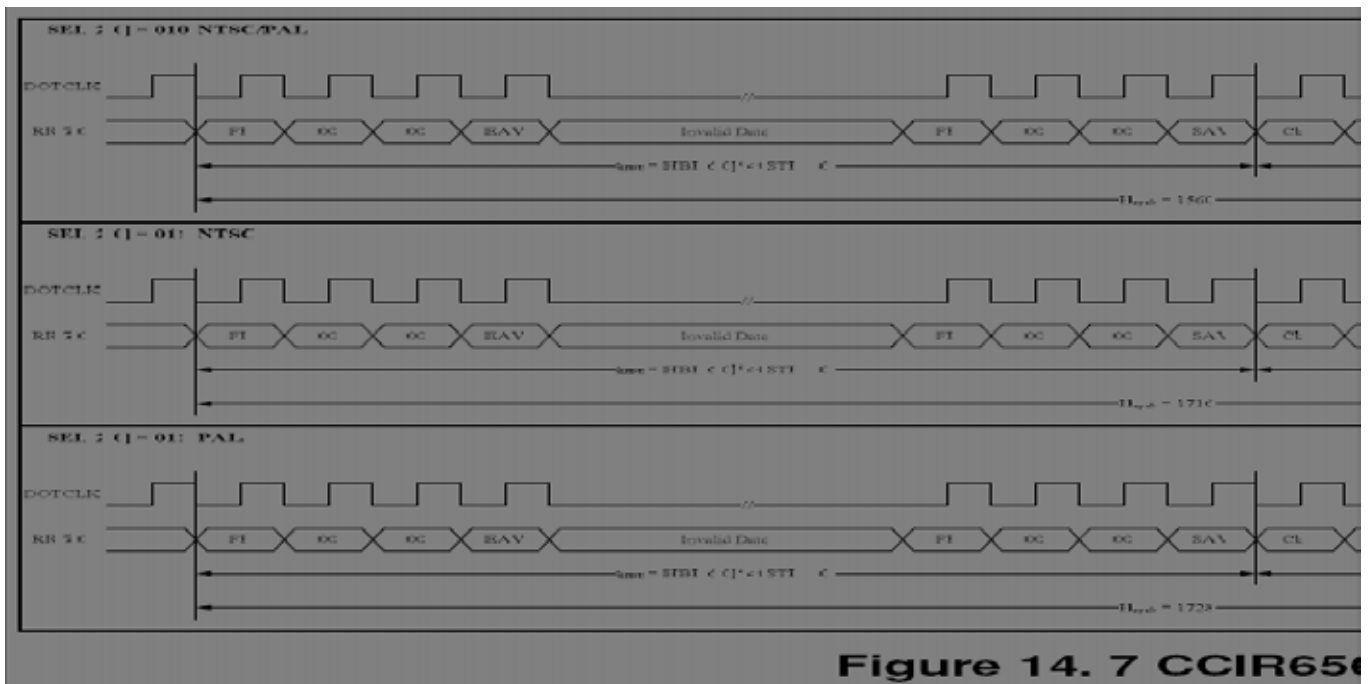
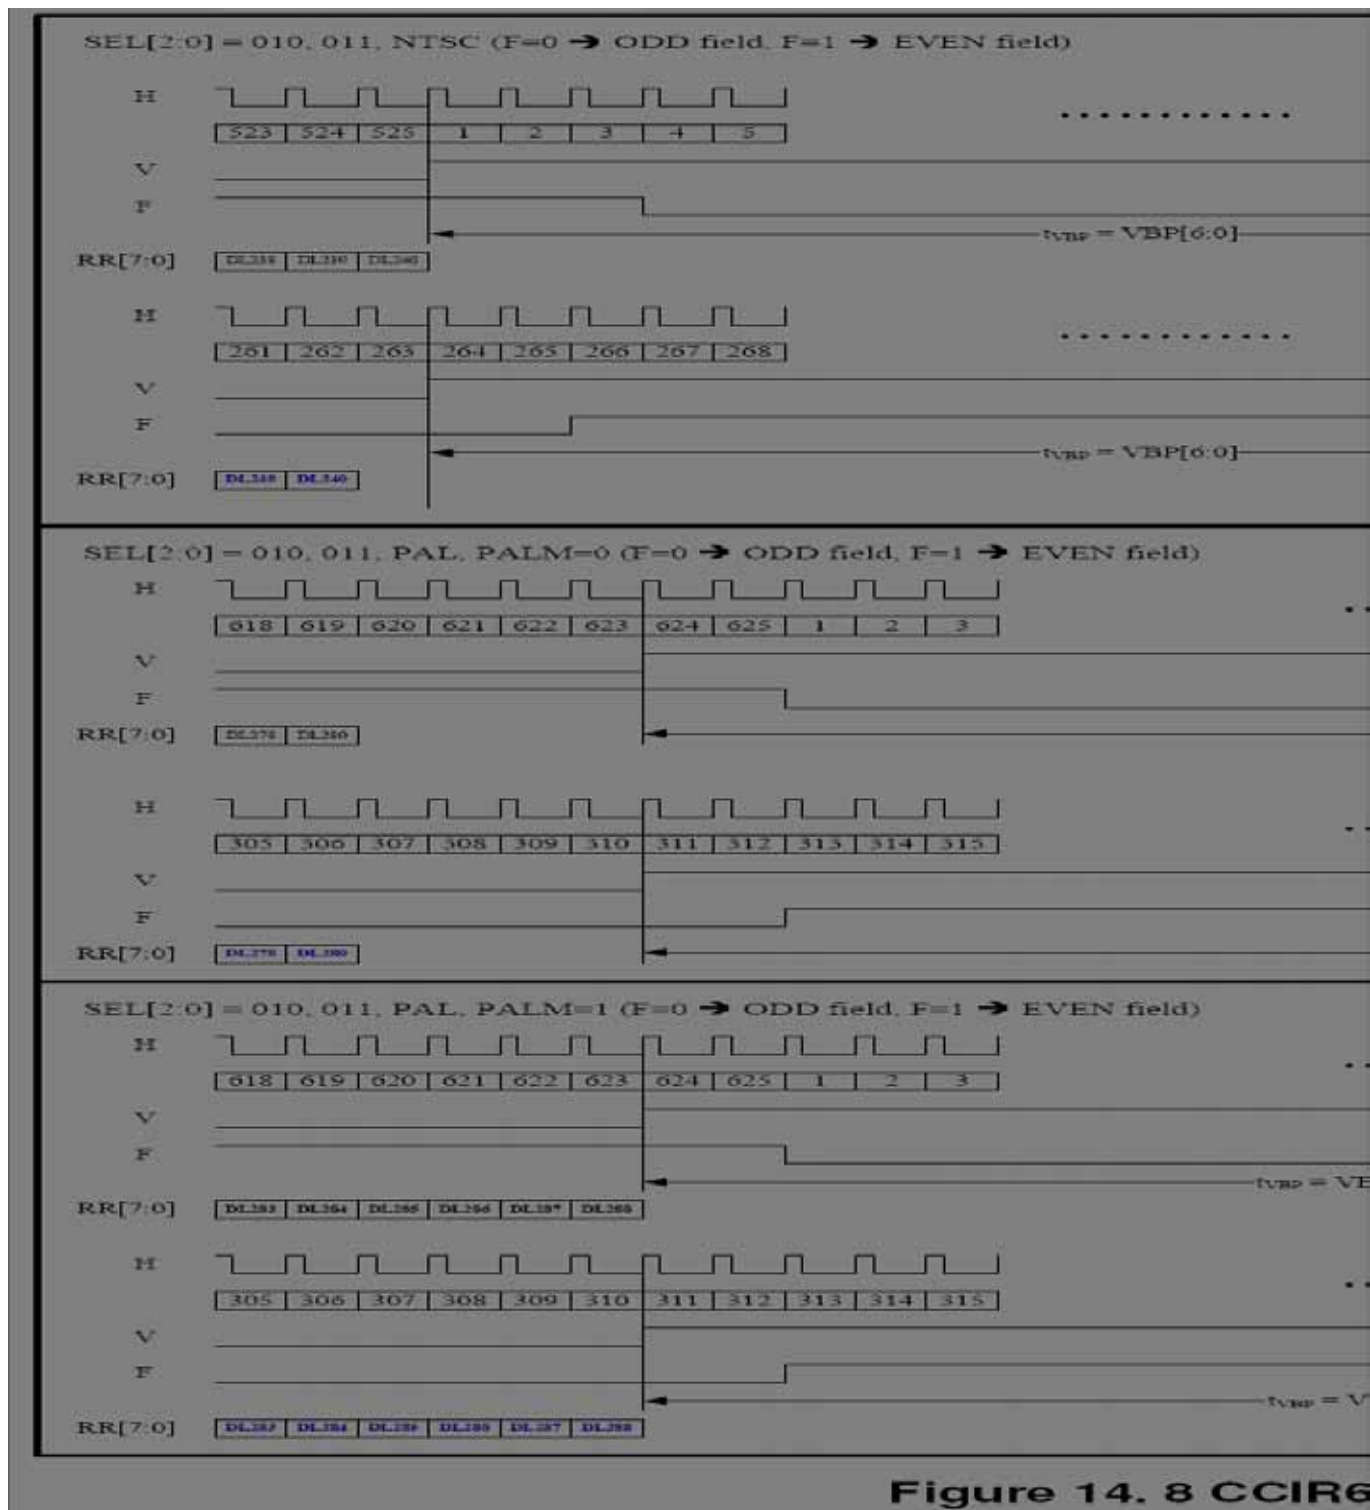


Figure 14. 7 CCIR656



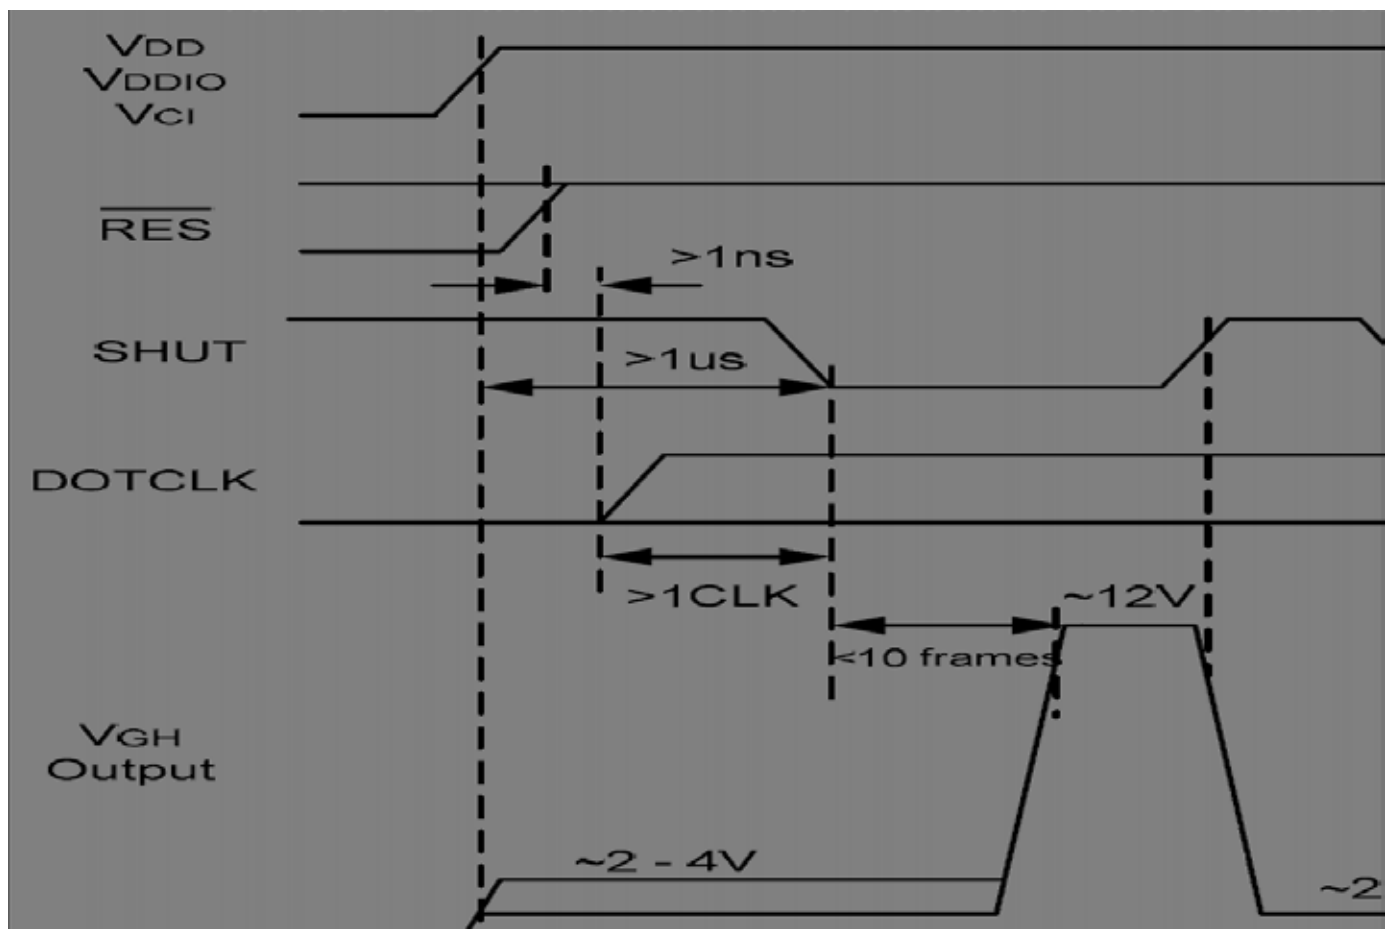


Figure 14. 9 VGH Output

- Note:**
- (1) The minimum cycle time of SHUT is $10 + 2$ frames.
 - (2) DOTCLK must be provided for boosting of VGH. DOTCLK are continuous supplied after power on.
 - (3) VGH and VGL will be forced to VSS at the low level.
 - (4) The minimum pulse width of RESB is $10\mu\text{s}$.

2-4-4 Power Up Sequence

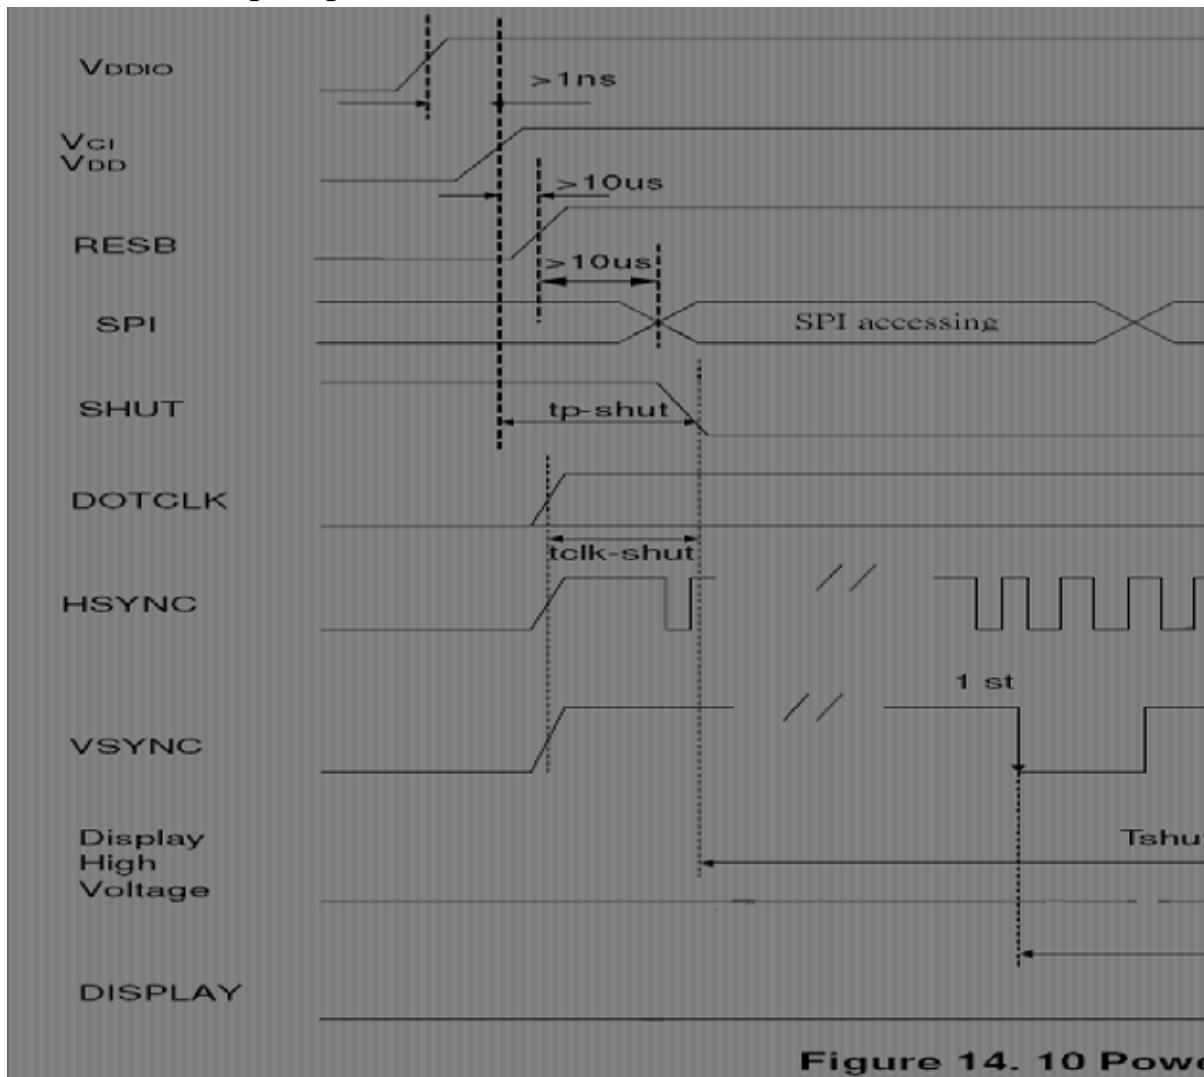


Figure 14. 10 Power

Characteristics	Symbol	Min	Typ	Max	Units
VDDD / VDDIO on to falling edge of SHUT	tp_shut	1	-	-	us
DOTCLK	$tclk_shut$	1	-	-	clk
Falling edge of SHUT to LCD power on	$tshut_lcd$	-	-	128	ms
Falling edge of SHUT to display start -1 line: 408 clk -1 frame: 262 line -DOTCLK = 7.5MHz	$tshut_on$	-	166	232.4	ms

Note: It is necessary to input DOTCLK before the falling edge of SHUT.

Display starts at 10th falling edge of VSTNC after the falling edge of SHUT.

Table 14. 3 Power Up Sequence

2-4-5 Power Down Sequence

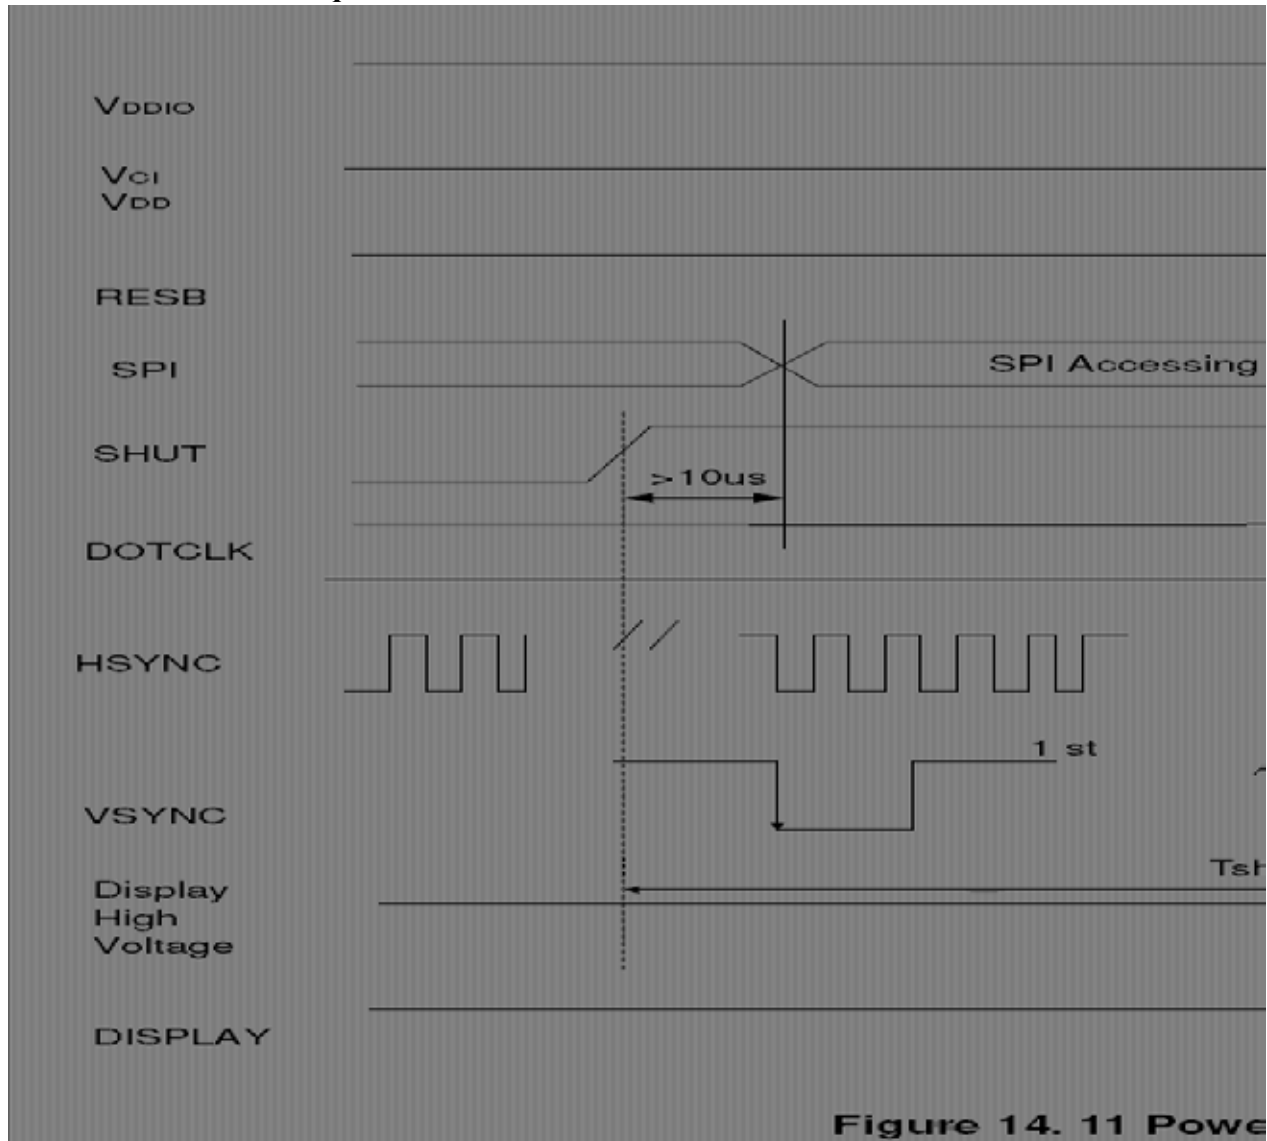


Figure 14. 11 Power Down Sequence

Characteristics	Symbol	Min	Typ	Max	Uni
Rising edge of SHUT to display off	tshut-off	2	-	-	frame
-1 line: 408 clk					
-1 frame: 262 line		33.4	-	-	ms
-DOTCLK = 7.5MHz					
Input-signal-off to VDDD / VDDIO off	toff-vdd	1	-	-	us


Note: DOTCLK must be maintained at least 2 frames after the rising edge of SHUT.

Display become off at the 2nd falling edge of VSTNC after the falling edge of SHUT.

If RESET signal is necessary for power down, provide it after the 2-frames-cycle of the SHUT period.

Table 14. 4 Power Down Sequence

2-4-6 SPI Timing

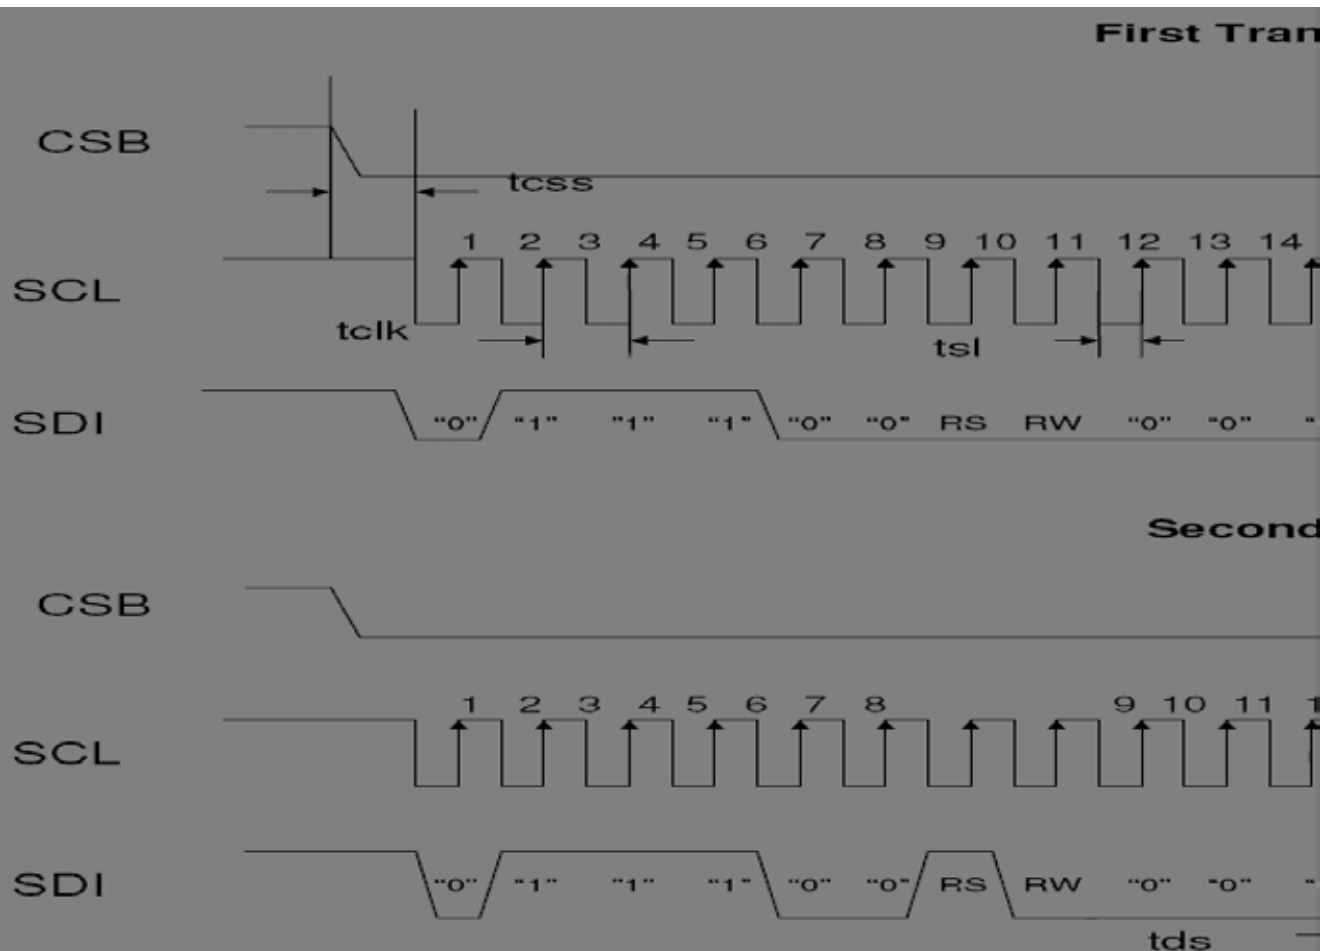

Note: The example transmit "0x1264h" to register R28h. SPID connected to VSS.

Figure 14. 12 SPI interface Timing

Characteristics	Symbol
Serial Clock Frequency	fclk
Serial Clock Cycle Time	tclk
Clock Low Width	tsl
Clock High Width	tsh
Chip Select Setup Time	tcss
Chip Select Hold Time	tcsd
Chip Select High Delay Time	tcsd
Data Setup Time	tds
Data Hold Time	tdh

Table 14

3. OPTICAL CHARACTERISTICS


3.1 Characteristics

Electrical and Optical Characteristics


No.	Item		symbol / temp.		Min.	Typ.	Max.	Unit	Note
1	Response Time		Tr	25 °C	-	15	20	ms	2
			Tf	25 °C	-	35	50		
2	Viewing Angle	Hor.	Θ ₂₊	0°	60	80	-	degree	3
			Θ ₂₋	180°	60	80	-		
		Ver.	Θ ₁₊	270°	45	50	-		
			Θ ₁₋	90°	60	80	-		
3	Contrast Ratio		Cr	25 °C	400	800	-	-	4
4	Red x-code		Rx	25 °C	0.58	0.63	0.68	-	5
	Red y-code		Ry		0.31	0.36	0.41		
	Green x-code		Gx		0.29	0.34	0.39		
	Green y-code		Gy		0.54	0.59	0.64		
	Blue x-code		Bx		0.09	0.14	0.19		
	Blue y-code		By		0.05	0.10	0.15		
	White x-code		Wx		0.27	0.32	0.37		
	White y-code		Wy		0.30	0.35	0.40		
	Brightness		Y		500	700	-	cd/m ²	
5	Brightness Uniformity			25 °C	80	-	-	%	6

3.2 Definition of optical characteristics

Measurement condition :

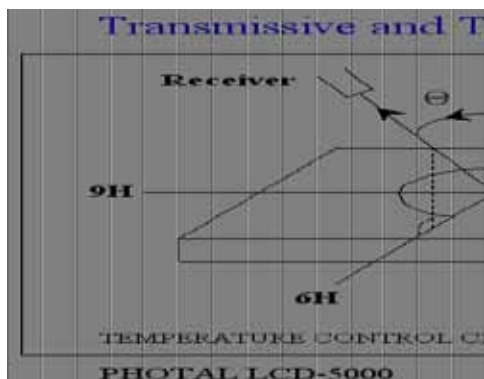


[Note 1] Definition of LCD Driving Vop and Waveform :

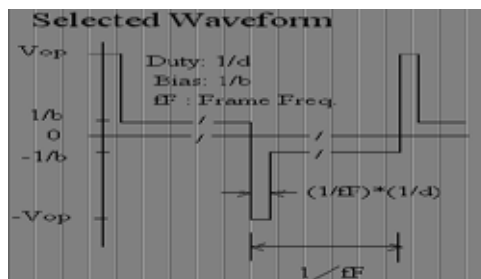


[Note 2] Definition of Response Time



[Note 3] Definition of Viewing Angle :

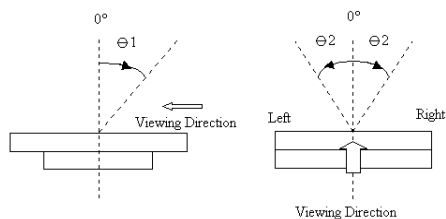


[Note 4] Definition of Contrast Ratio :

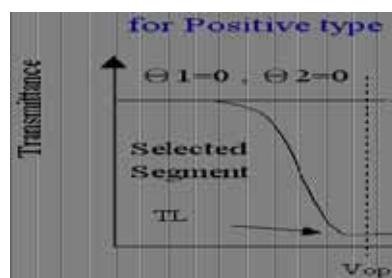


Contrast Ratio

[Note 5] Definition of measurement of Color Chromaticity and Brightness

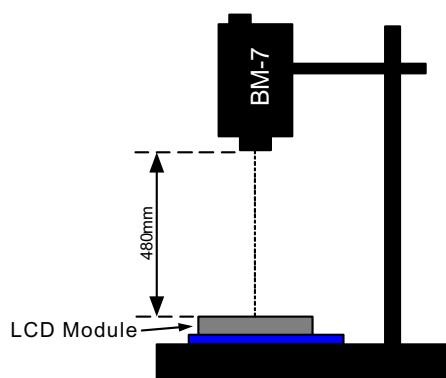


[Note 6] Definition of Brightness Uniformity

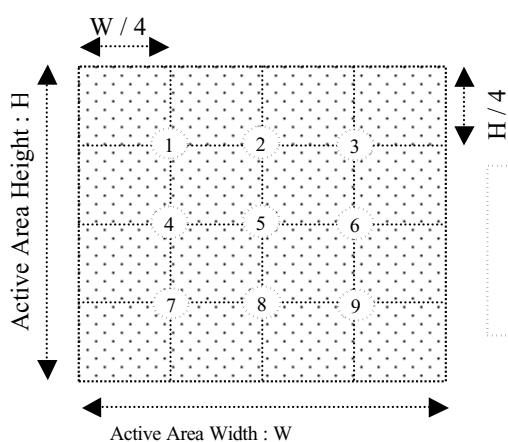

$$\text{Brightness Uniformity} = \frac{\text{Minimum Brightness of Point 1~9}}{\text{Maximum Brightness of Point 1~9}}$$

[Note 7] Definition of Measurement of Reflectance

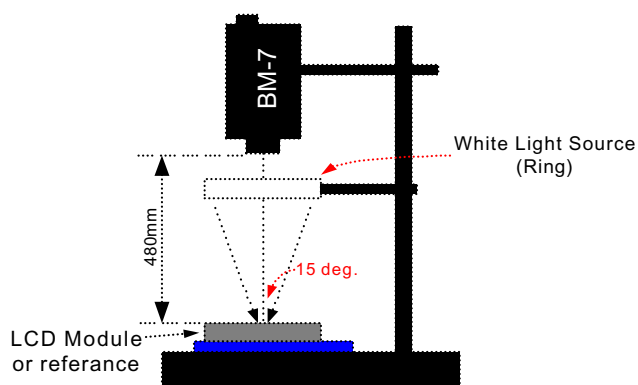

4. RELIABILITY :

Item No	Items	Condition
1	High temperature operating	70 °C , 200 hours
2	Low temperature operating	-20 °C , 200 hours
3	High temperature storage	80 °C , 200 hours
4	Low temperature storage	-30 °C , 200 hours
5	High temperature & humidity storage	60°C, 90%RH, 100 hours
6	Thermal Shock storage	-30°C, 30min.<=> 80°C, 30min. 10 Cycles
7	Vibration test	10 => 55 => 10 => 55 => 10 Hz , within 1 minute Amplitude : 1.5mm. 15 minutes for each Direction (X,Y,Z)
8	Drop test	Packed, 100CM free fall, 6 sides, 1 corner, 3edges
9	Life time	50,000 hours 25°C , 70%RH below , specification condition driving

* One single product test for only one item.

* Judgment after test : keep in room temperature for more than 2 hours.

- Current consumption < 2 times of initial value
- Contrast > 1/2 initial value
- Function : work normally

5. PRODUCT HANDLING AND APPLICATION

☐ PRECAUTION FOR HANDLING LCM

- The LCD module contains a C-MOS LSI. People who operate the LCM should wear ESD protection equipment to prevent ESD hurt on products.
- Do not input any signal before power is turned on.
- Do not take LCM from its packaging bag until it is assembled.
- Peel off the LCM protective film slowly since static electricity may be generated.
- Pay attention to the humidity of the work shop, 50~60%RH is satisfactory.
- Use a non-leak iron for soldering LCM.
- Do not touch the display surface or connection terminals area with bare hands. Smudges on the display surface reduce the insulation between terminals.
- Cautions for soldering to LCM:
Condition for soldering I/O terminals:
Temperature at iron tip : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$.
Soldering time : 3~4sec./ terminals.
Type of solder : Eutectic solder(rosin flux filled).

☐ PRECAUTION IN USE OF LCD

- Do not contact or scratch the front surface and the contact pads of a LCD panel with hard materials such as metal or glass or with one's nail.
- To clean the surface , wipe it gently with soft cloth dampened by alcohol.
- Do not attempt to wipe off the contact pads.
- Keep LCD panels away from direct sunlight , also avoid them in high-temperature & high humidity environment for a long period.
- Do not drive LCD panels by DC voltage.
- Do not expose LCD panels to organic solvent.
- Liquid in LCD is hazardous substance. In case a contact with liquid crystal material is occurred, be sure to immediately wash such material away by soap and water.
- The polarizer is easily damaged and should be handle with special care. Don't press or rub it with hard objects.

☐ PRECAUTION FOR STORING LCM

- To avoid degradation of the device , do not store the module under the conditions of direct sunlight , high temperature or high humidity . Keep the module in bags designed to prevent static electricity charging under low temperature / normal humidity conditions(avoid high temperature / high humidity and low temperature below 0°C)

☐ USING ON MEDICAL CARE , SAFETY OR HAZARDOUS APPLICATION OR SYSTEM

- For the application in medical care, safety and hazardous products or systems, an authorization from URT is required. URT will not responsible for any damage or loss which caused by the products without any authorization given by URT.
- This product is not allowed to be designed and used for military application and/or purpose.
- The delivery of this product to the countries and/or regions where the embargoes are imposed by U.N. is prohibited.

6. DATE CODE OF PRODUCTS


- Date code will be shown on each product :

- Y MM DD - XXX
| | | |
Year Month Day - Production lots


- Example: 2 1 2 2 3 - 0 0 3 ==>Year 2002, Dec.,23rd , Batch no.03

7. PACKING


Instruction of lot number:

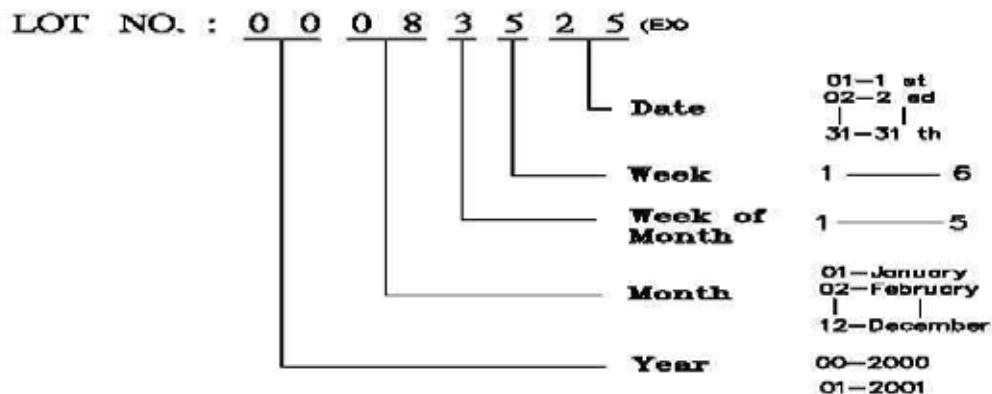

Label of carton:

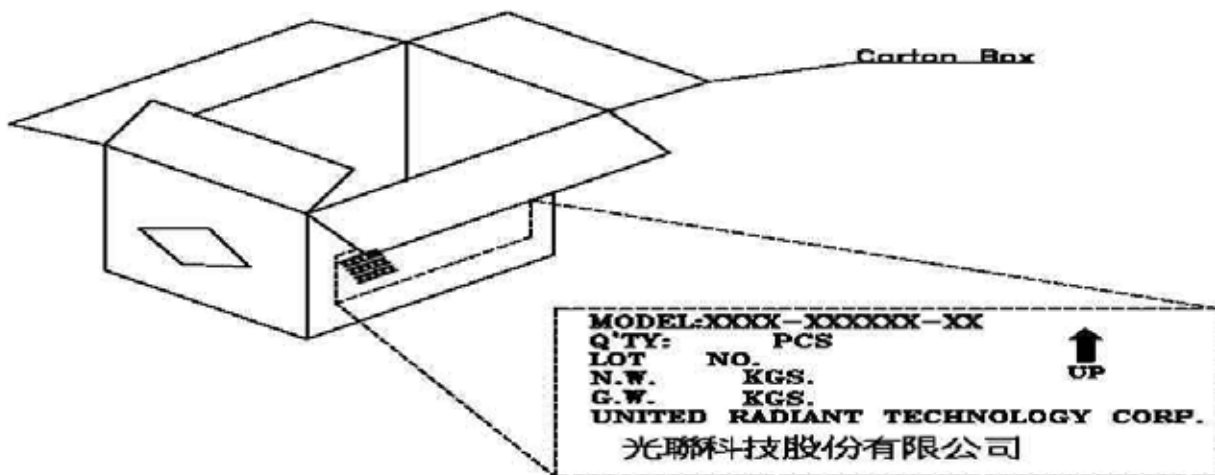

Packing tray must be stacked with alternated direction to each others.
To tacks packing trays in same direction will cause product damaged.

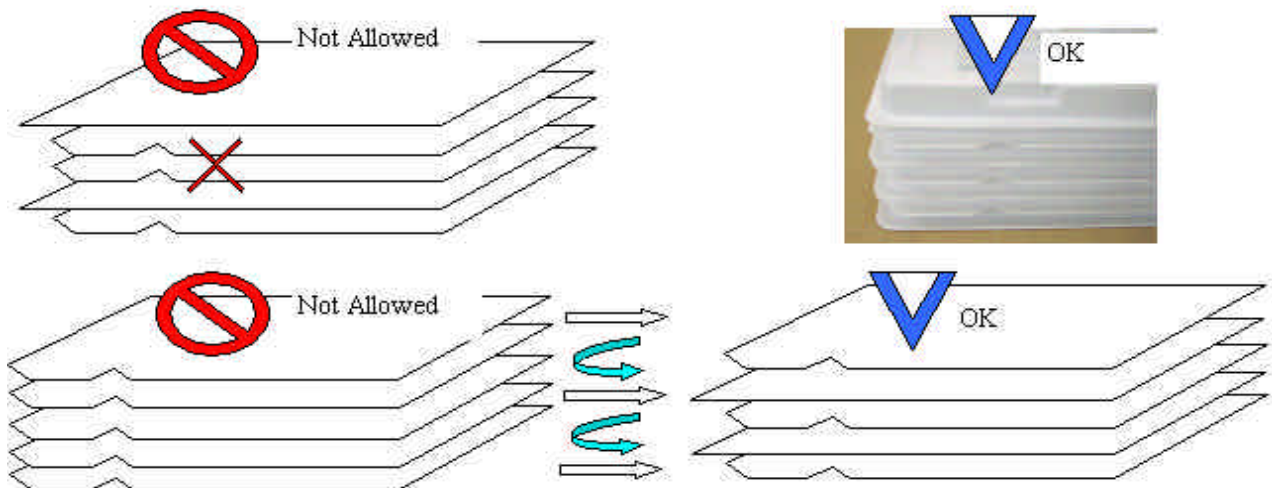

MODEL NO: UM*

T.B.D.pcs / Tray

T.B.D.Tray / Box


T.B.D. Box / Carton

T.B.D.pcs / Carton

NOTE:

(1) Be warned, the direction of the tray has to turn it by 180 degree before stack it up. Otherwise, it will be packager's responsibility!!

(2) Safe Stack : 5 cartons only

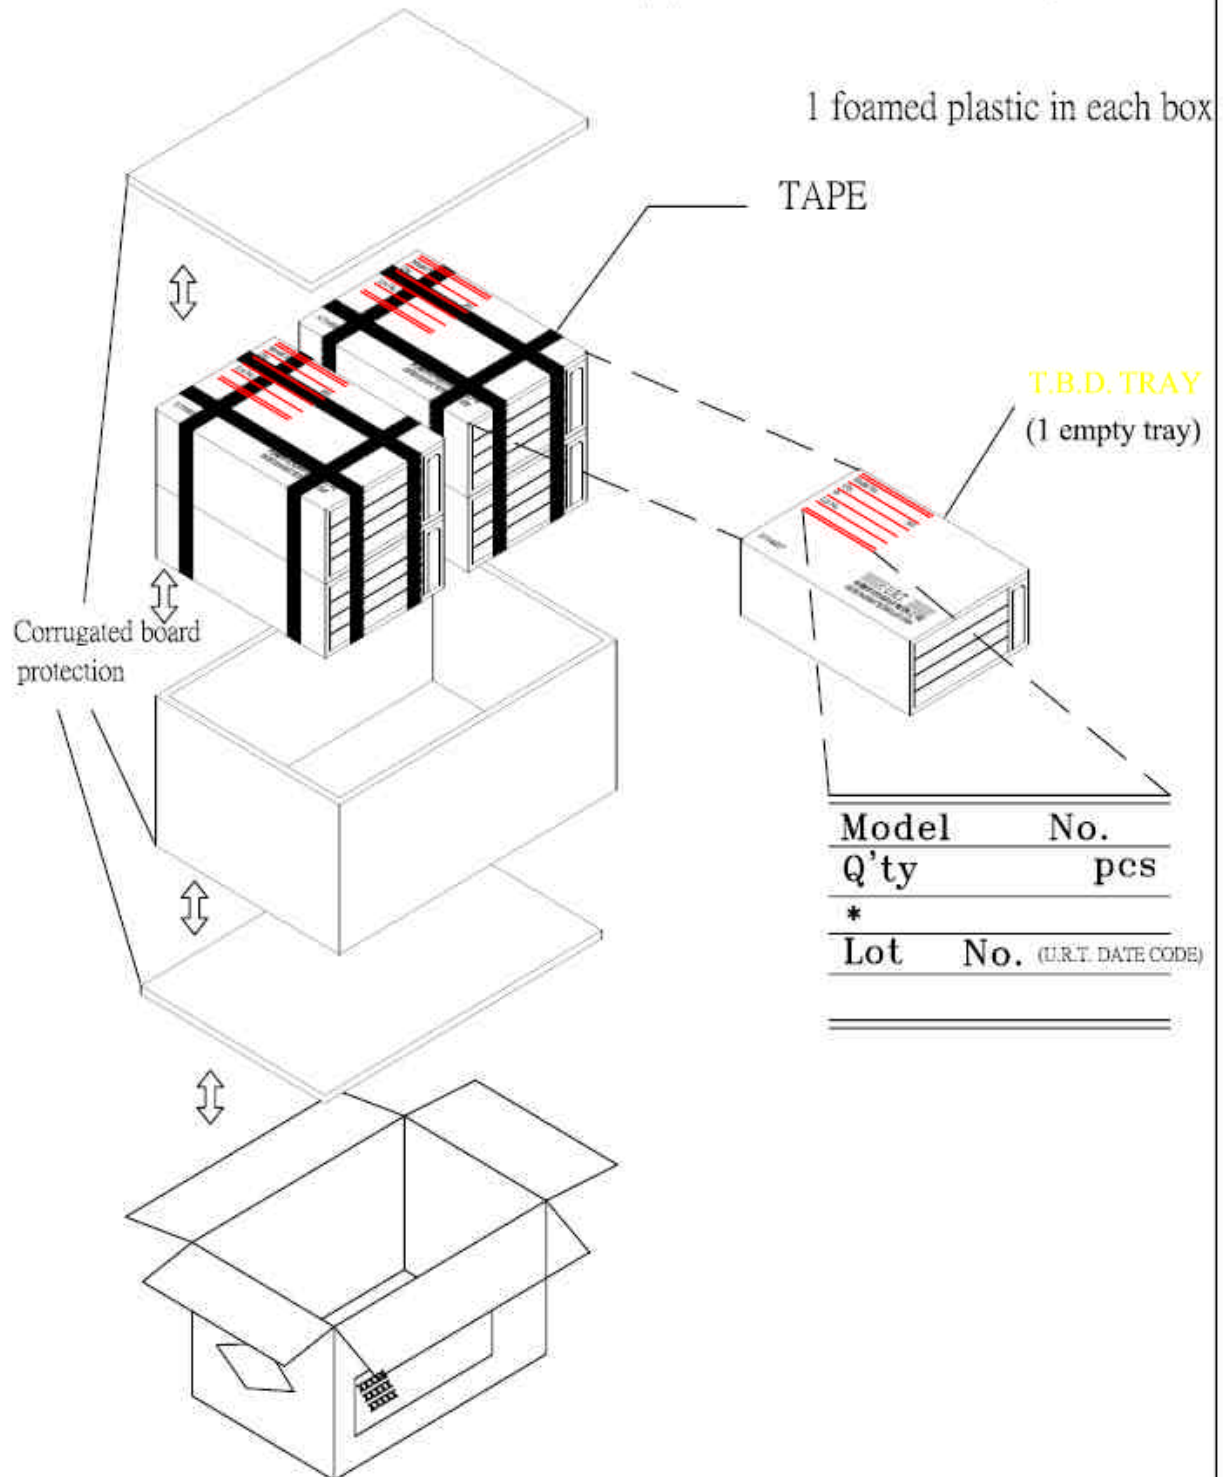

8. INSPECTION STANDARD

8.1. QUALITY :

THE QUALITY OF GOODS SUPPLIED TO PURCHASER SHALL COME UP TO THE FOLLOWING STANDARD.

8.1.1. THE METHOD OF PRESERVING GOODS

AFTER DELIVERY OF GOODS FROM U.R.T. TO PURCHASER. PURCHASER SHALL CONTROL THE LCM AT -10 °C ~ 40 °C ,AND IT MIGHT BE DESIRABLE TO KEEP AT THE NORMAL ROOM TEMPERATURE AND HUMIDITY UNTIL INCOMING INSPECTION OR THROWING INTO PROCESS LINE.

8.1.2. INCOMING INSPECTION

(A) THE METHOD OF INSPECTION

IF PURCHASER MAKE AN INCOMING INSPECTION , A SAMPLING PLAN SHALL BE APPLIED ON THE CONDITION THAT QUALITY OF ONE DELIVERY SHALL BE REGARDED AS ONE LOT.

(B) THE STANDARD OF QUALITY

ISO-2859-1 (or MIL-STD-105E) , LEVEL II SINGLE PLAN.

CLASS	AQL(%)
CRITICAL	0.4 %
MAJOR	0.65 %
MINOR	1.5 %
TOTAL	1.5 %

EVERY ITEM SHALL BE INSPECTED ACCORDING TO THE CLASS.

(C) MEASURE

IF AS THE RESULT OF ABOVE RECEIVING INSPECTION , A LOT OUT IS DISCOVERED.

PURCHASER SHALL BE INFORM SELLER OF IT WITHIN SEVEN DAYS. BUT FIRST SHIPMENT WITHIN FOURTEEN DAYS.

8.1.3. WARRANTY POLICY

U.R.T. WILL PROVIDE ONE-YEAR WARRANTY FOR THE PRODUCTS ONLY IF UNDER SPECIFICATION OPERATING CONDITIONS. U.R.T. WILL REPLACE NEW PRODUCTS FOR THESE DEFECT PRODUCTS WHICH UNDER WARRANTY PERIOD AND BELONG TO THE RESPONSIBILITY OF U.R.T.

8.2. CHECKING CONDITION

8.2.1. CHECKING DIRECTION SHALL BE IN THE 45 DEGREE AREA TO FACE THE SAMPLE.








8.2.2. CHECKER SHALL SEE OVER 30 cm. WITH BARE EYES FAR FROM SAMPLE AND USING 2 PCS. OF 20W FLUORESCENT LAMP.

8.3. INSPECTION PLAN :

CLASS	ITEM	JUDGEMENT	CLASS
PACKING & INDICATE	1. OUTSIDE AND INSIDE PACKAGE	"MODEL NO." , "LOT NO." AND "QUANTITY" SHOULD INDICATE ON THE PACKAGE.	Minor
	2. MODEL MIXED AND QUANTITY	OTHER MODEL MIXED.....REJECTED QUANTITY SHORT OR OVER.....REJECTED	Critical
	3. PRODUCT INDICATION	"MODEL NO." SHOULD INDICATE ON THE PRODUCT	Major
ASSEMBLY	4. DIMENSION, LCD GLASS SCRATCH AND SCRIBE DEFECT.	ACCORDING TO SPECIFICATION OR DRAWING.	Major
APPEARANCE	5. VIEWING AREA	POLARIZER EDGE OR LCD'S SEALING LINE IS VISABLE IN THE VIEWING AREAREJECTED	Minor
	6. BLEMISH 、 BLACK SPOT 、 WHITE SPOT IN THE LCD AND LCD GLASS CRACKS	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	7. BLEMISH 、 BLACK SPOT WHITE SPOT AND SCRATCH ON THE POLARIZER	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	8. BUBBLE IN POLARIZER	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	9. LCD'S RAINBOW COLOR	STRONG DEVIATION COLOR (OR NEWTON RING) OF LCD.....REJECTED. OR ACCORDING TO LIMITED SAMPLE (IF NEEDED, AND INSIDE VIEWING AREA)	Minor
ELECTRICAL	10. ELECTRICAL AND OPTICAL CHARACTERISTICS (CONTRAST 、 VOP 、 CHROMATICITY ... ETC)	ACCORDING TO SPECIFICATION OR DRAWING . (INSIDE VIEWING AREA)	Critical
	11.MISSING LINE	MISSING DOT 、 LINE 、 CHARACTERREJECTED	Critical
	12.SHORT CIRCUIT 、 WRONG PATTERN DISPLAY	NON DISPLAY 、 WRONG PATTERN DISPLAY 、 CURRENT CONSUMPTION OUT OF SPECIFICATION..... REJECTED	Critical
	13. PIN HOLE 、 PATTERN DEFORMITY	ACCORDING TO STANDARD OF VISUAL INSPECTION	Minor

8.4. STANDARD OF VISUAL INSPECTION

NO.	CLASS	ITEM	JUDGEMENT																																	
8.4.1	MINOR	· BLEMISH、BLACK SPOT、 WHITE SPOT IN THE LCD. · BLEMISH、BLACK SPOT、 WHITE SPOT AND SCRATCH ON THE POLARIZER	(A) ROUND TYPE: unit : mm. <table><tr><td>DIAMETER (mm.)</td><td>ACCEPTABLE Q'TY</td></tr><tr><td>$\Phi \leq 0.1$</td><td>DISREGARD</td></tr><tr><td>$0.1 < \Phi \leq 0.2$</td><td>2</td></tr><tr><td>$0.2 < \Phi \leq 0.25$</td><td>1</td></tr><tr><td>$0.25 < \Phi$</td><td>0</td></tr></table> NOTE: $\Phi=(\text{LENGTH}+\text{WIDTH})/2$ <td>(B) LINER TYPE: unit : mm.<table><tr><td>LENGTH</td><td>WIDTH</td><td>ACCEPTABLE Q'TY</td></tr><tr><td>-----</td><td>$W \leq 0.03$</td><td>DISREGARD</td></tr><tr><td>$L \leq 5.0$</td><td>$0.03 < W \leq 0.05$</td><td>3</td></tr><tr><td>$L \leq 5.0$</td><td>$0.05 < W \leq 0.07$</td><td>1</td></tr><tr><td>-----</td><td>$0.07 < W$</td><td>FOLLOW ROUND TYPE</td></tr></table></td>	DIAMETER (mm.)	ACCEPTABLE Q'TY	$\Phi \leq 0.1$	DISREGARD	$0.1 < \Phi \leq 0.2$	2	$0.2 < \Phi \leq 0.25$	1	$0.25 < \Phi$	0	(B) LINER TYPE: unit : mm. <table><tr><td>LENGTH</td><td>WIDTH</td><td>ACCEPTABLE Q'TY</td></tr><tr><td>-----</td><td>$W \leq 0.03$</td><td>DISREGARD</td></tr><tr><td>$L \leq 5.0$</td><td>$0.03 < W \leq 0.05$</td><td>3</td></tr><tr><td>$L \leq 5.0$</td><td>$0.05 < W \leq 0.07$</td><td>1</td></tr><tr><td>-----</td><td>$0.07 < W$</td><td>FOLLOW ROUND TYPE</td></tr></table>	LENGTH	WIDTH	ACCEPTABLE Q'TY	-----	$W \leq 0.03$	DISREGARD	$L \leq 5.0$	$0.03 < W \leq 0.05$	3	$L \leq 5.0$	$0.05 < W \leq 0.07$	1	-----	$0.07 < W$	FOLLOW ROUND TYPE							
			DIAMETER (mm.)	ACCEPTABLE Q'TY																																
			$\Phi \leq 0.1$	DISREGARD																																
			$0.1 < \Phi \leq 0.2$	2																																
			$0.2 < \Phi \leq 0.25$	1																																
			$0.25 < \Phi$	0																																
			LENGTH	WIDTH	ACCEPTABLE Q'TY																															
			-----	$W \leq 0.03$	DISREGARD																															
			$L \leq 5.0$	$0.03 < W \leq 0.05$	3																															
			$L \leq 5.0$	$0.05 < W \leq 0.07$	1																															
-----	$0.07 < W$	FOLLOW ROUND TYPE																																		
8.4.2	MINOR	BUBBLE IN POLARIZER	unit : mm. <table><tr><td>DIAMETER</td><td>ACCEPTABLE Q'TY</td></tr><tr><td>$\Phi \leq 0.15$</td><td>DISREGARD</td></tr><tr><td>$0.15 < \Phi \leq 0.5$</td><td>2</td></tr><tr><td>$0.5 < \Phi$</td><td>0</td></tr></table>	DIAMETER	ACCEPTABLE Q'TY	$\Phi \leq 0.15$	DISREGARD	$0.15 < \Phi \leq 0.5$	2	$0.5 < \Phi$	0																									
			DIAMETER	ACCEPTABLE Q'TY																																
			$\Phi \leq 0.15$	DISREGARD																																
			$0.15 < \Phi \leq 0.5$	2																																
$0.5 < \Phi$	0																																			
8.4.3	MINOR	Dot Defect	<table><tr><td>Items</td><td>ACC. Q'TY</td></tr><tr><td>Bright dot</td><td>$N \leq 4$</td></tr><tr><td>Dark dot</td><td>$N \leq 4$</td></tr></table> Pixel Define <table><tr><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td></tr><tr><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td></tr><tr><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td></tr></table> Not 1: The definition of dot: The size of a defective dot over 1/2 of whole dot is regarded as one defective dot. Not 2: Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern. Not 3: Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green ,blue pattern.	Items	ACC. Q'TY	Bright dot	$N \leq 4$	Dark dot	$N \leq 4$	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B
			Items	ACC. Q'TY																																
			Bright dot	$N \leq 4$																																
			Dark dot	$N \leq 4$																																
R	G	B	R	G	B	R	G	B																												
R	G	B	R	G	B	R	G	B																												
R	G	B	R	G	B	R	G	B																												

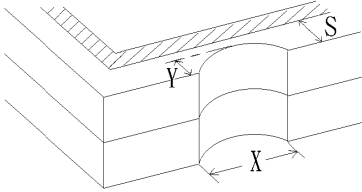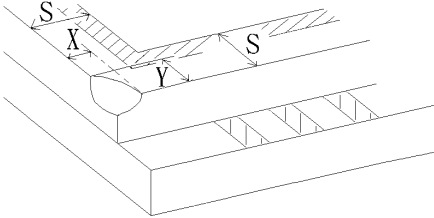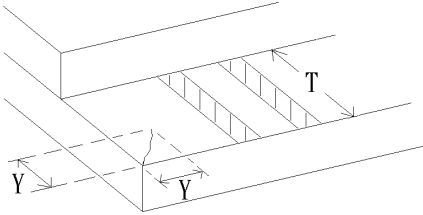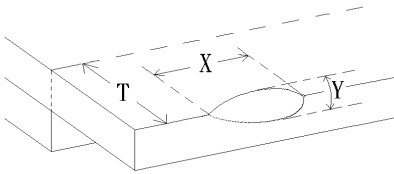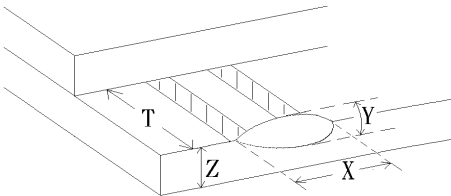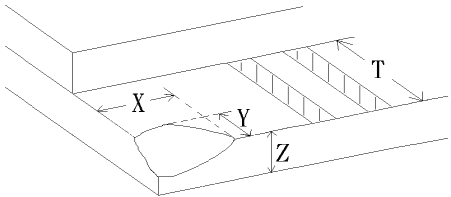NO.	CLASS	ITEM	JUDGEMENT
8.4.4	MINOR	CHIPPING	 $Y > S$ REJ.
8.4.5	MINOR	CHIPPING	 $X \text{ or } Y > S$ REJ.
8.4.6	MAJOR	GLASS CRACK	 $Y > (1/2) T$ REJ.
8.4.7	MAJOR	SCRIBE DEFECT	 $a > L/3$, $A > 1.5\text{mm}$. REJ. - B : ACCORDING TO DIMENSION
8.4.8	MINOR	CHIPPING (ON THE TERMINAL AREA)	 $\Phi = (x+y)/2 > 2.5 \text{ mm}$ REJ.
8.4.9	MINOR	CHIPPING (ON THE TERMINAL SURFACE)	 $Y > (1/3) T$ REJ.
8.4.10	MINOR	CHIPPING	 $Y > T$ REJ.

AVNET EMBEDDED OFFICES.

DENMARK

Avnet Embedded
Avnet Nortec A/S
Ellekær 9
2730 Herlev
Phone: +45 3678 6250
Fax: +45 3678 6255
denmark@avnet-embedded.eu

FINLAND

Avnet Embedded
Avnet Nortec Oy
Tiilenpolttajankuja 3 A B
1720 Vantaa
Phone: +358 207 499260
Fax: +358 942 597446
finland@avnet-embedded.eu

FRANCE

Avnet Embedded
Avnet EMG France SA
Immeuble 154, Parc Chene 2
5, allée du General Benoist
69000 Bron
Phone: +33 4 72 81 02 30
Fax: +33 4 72 81 02 34
axess-bron@avnet-embedded.eu

Avnet Embedded
Avnet EMG France SA
6-8, rue Ambroise Croizat
ZAE Les Glaises
91127 Palaiseau Cedex
Phone: +33 1 64 47 29 29
Fax: +33 1 64 47 99 99
palaiseau@avnet-embedded.eu

Avnet Embedded
Avnet EMG France SA
ZA la Hallerais le Semiramis
2, allée du Communal
35770 Vern sur Seiche
Phone: +33 2 99 77 37 02
Fax: +33 2 99 77 33 38
axess-rennes@avnet-embedded.eu

GERMANY (AUSTRIA, CZECH REPUBLIC, HUNGARY, POLAND, SWITZERLAND)

Avnet Embedded
Avnet EMG GmbH
Gruber Straße 60c
85586 Poing
Phone: +49 8121 775 500
Fax: +49 8121 775 550
poing@avnet-embedded.eu

Avnet Embedded
Avnet EMG GmbH
Lötscher Weg 66
41334 Nettetal
Phone: +49 8121 775 500
Fax: +49 8121 775 550
nettetal@avnet-embedded.eu

ITALY (PORTUGAL, SPAIN)

Avnet Embedded
Avnet EMG Italy SRL
Via Manzoni, 44
20095 Cusano Milanino
Phone: +39 02 66092 1
Fax: +39 02 66092 498
milano@avnet-embedded.eu

NETHERLANDS (BELGIUM, LUXEMBOURG)

Avnet Embedded
Avnet B.V.
Takkebijsters 2
4802 BL Breda
Phone: +31 76 5722400
Fax: +31 76 5722404
benelux@avnet-embedded.eu

SWEDEN (NORWAY)

Avnet Embedded
Avnet Nortec AB
Esplanaden 3 D
172 67 Sundbyberg
Phone: +46 8 564 725 50
Fax: +46 8 760 01 10
sweden@avnet-embedded.eu

UNITED KINGDOM (IRELAND)

Avnet Embedded
Avnet EMG Ltd.
Pilgrims Court, 15/17 West Street
Reigate, Surrey, RH2 9BL
Phone: +44 1737 227800
Fax: +44 1737 243872
uk@avnet-embedded.eu

All trademarks and logos are the property of their respective owners. This document provides a brief overview only and is not intended to be complete or binding offer. Product information, including information related to a product's specifications, uses or conformance with legal or other requirements, is obtained by Avnet from its suppliers or other sources deemed reliable and is provided by Avnet on an „As Is” basis. Avnet makes no representation as to the accuracy or completeness of the product information and Avnet disclaims all representations, warranties and liabilities under any theory with respect to the product information, including any implied warranties of merchantability, fitness for a particular purpose, title and/or non-refrimentation. All product information is subject to change without notice.

LOCAL AVNET EMBEDDED BUSINESSES:

axess
technology

An Avnet Embedded Business

tdc

An Avnet Embedded Business

trident

An Avnet Embedded Business