



REV	MARK	HISTORY	DATE	NAME
-----	------	---------	------	------

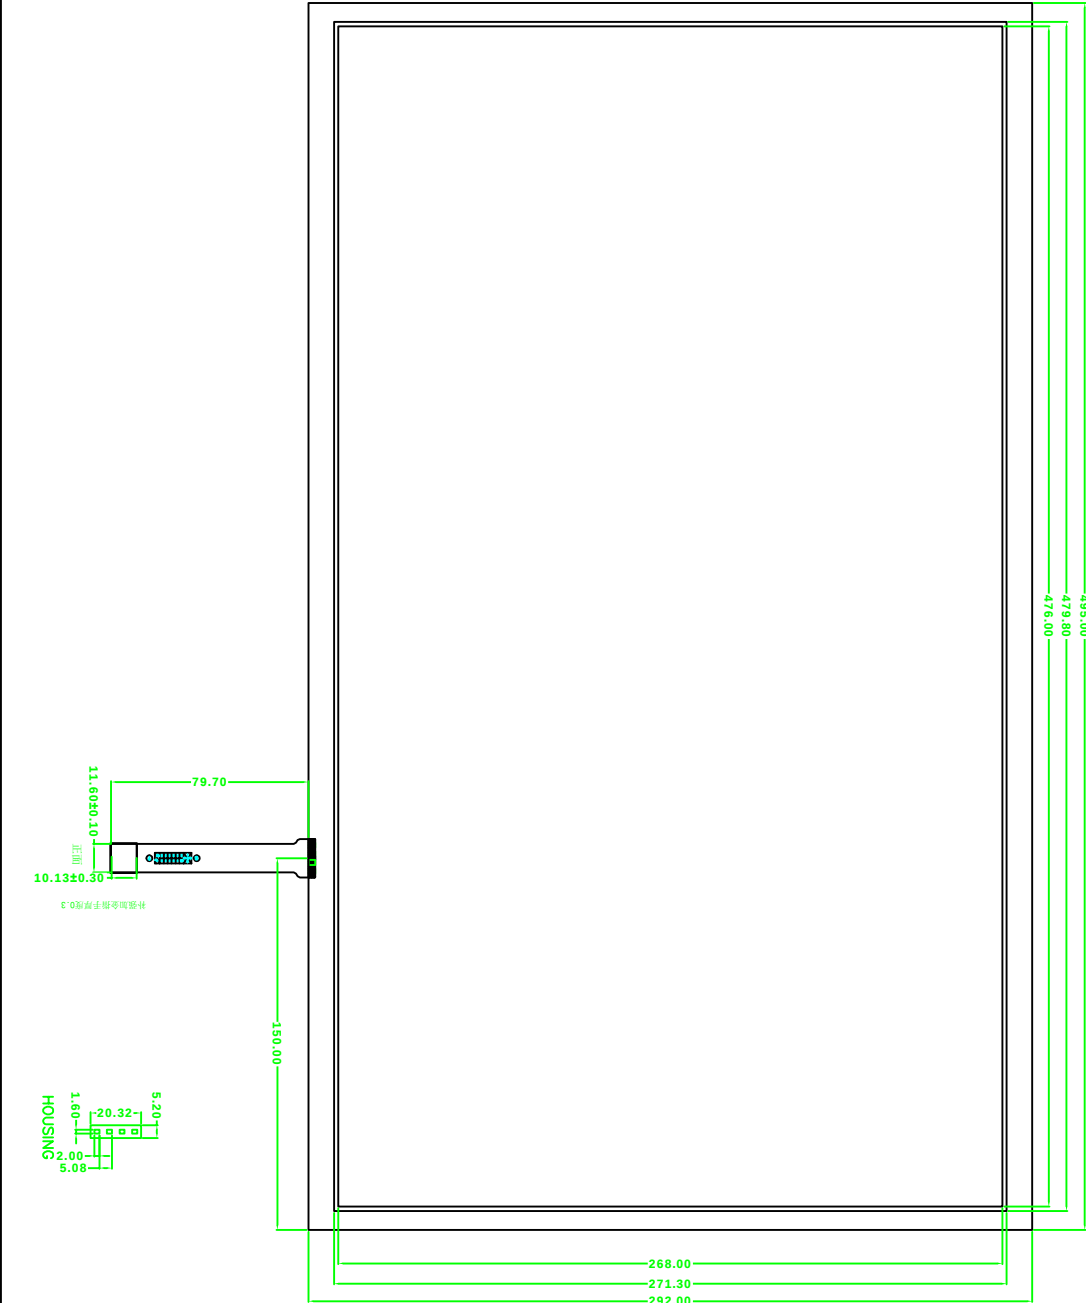

补充制造用手厚0.3
正面

5.20
20.32
1.60
2.00
5.08
HOUSING

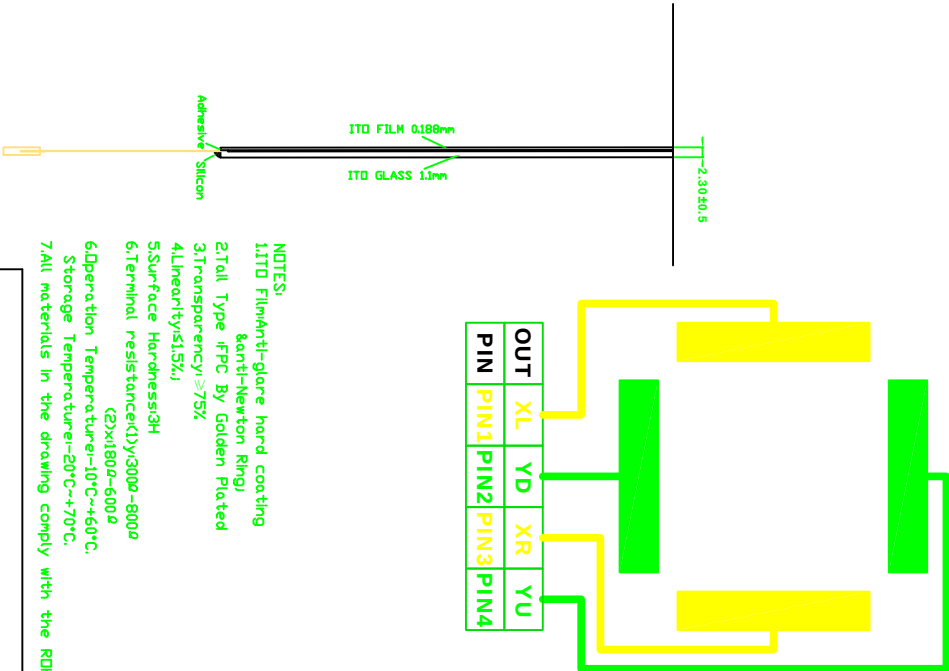

OUT	XL	YD	XR	YU
PIN	PIN1	PIN2	PIN3	PIN4

- NOTES:
1. ITO Film/Anti-glare hard coating
 2. ITO Type (FPC By Golden Plated)
 3. Transparency $\geq 75\%$
 4. Linearity $\leq 1.5\%$
 5. Surface Hardness $\geq 3H$
 6. Terminal resistance $\leq 300\Omega - 800\Omega$
 7. Operation Temperature $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 8. Storage Temperature $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 9. All materials in the drawing comply with the ROHS

Unspecified Tolerance	AS20	ST-215001	VERSION: 1.0
DESIGNED BY:			NO. 1 OF 1
CHECKED BY:			UNIT: MM
			DATE: 2015-08-28