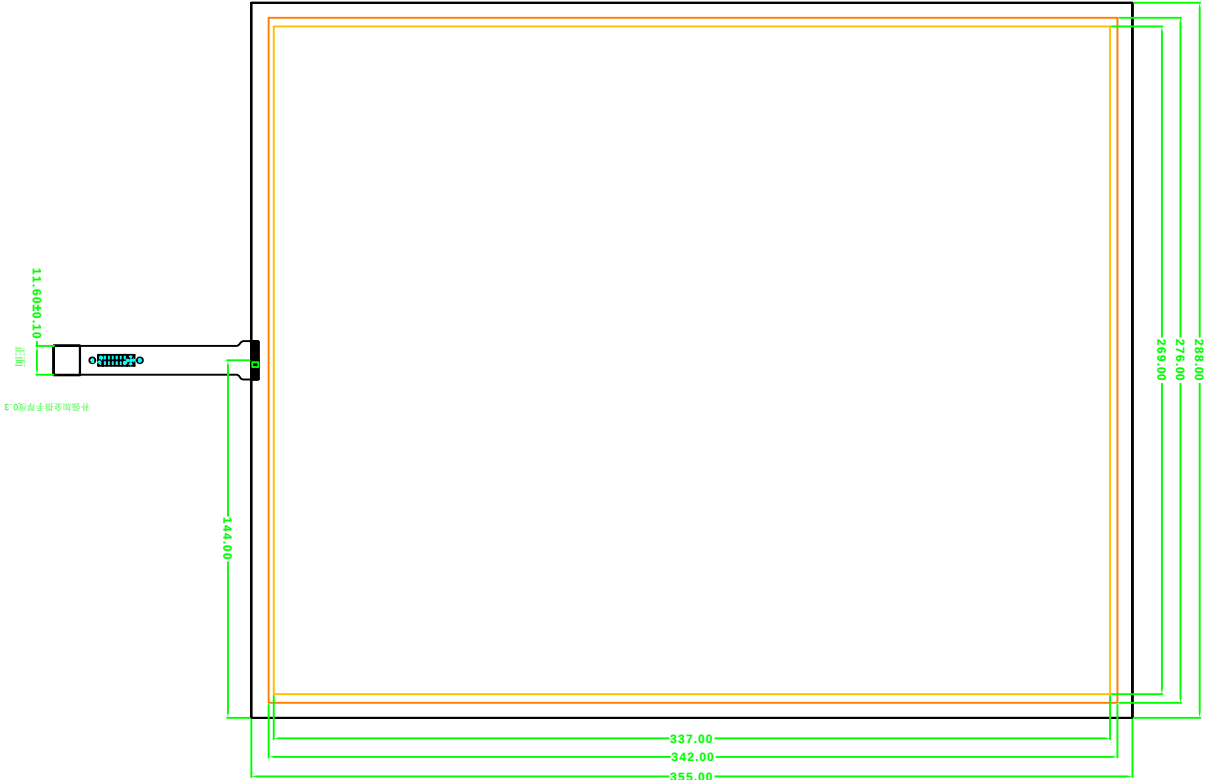


- NOTES:
1. ITO Film/Anti-glare hard coating
 2. Anti-Newton Ring
 3. Tail Type IFPC By Golden Plated
 3. Transparency $\geq 75\%$
 4. Linearity $\leq 1.5\%$
 5. Surface Hardness $\geq 3H$
 6. Terminal resistance $\leq 300\Omega - 800\Omega$
 6. Operation Temperature $-10^{\circ}\text{C} - +60^{\circ}\text{C}$
 6. Storage Temperature $-20^{\circ}\text{C} - +70^{\circ}\text{C}$
 7. All materials in the drawing comply with the ROHS

Unspecified Tolerance ±0.20		VERSION: 1.0	
DESIGNED BY: LU	ST-17001	NO. 1	OF 1
CHECKED BY: LU		UNIT: MM	DATE: 2016-08-28