
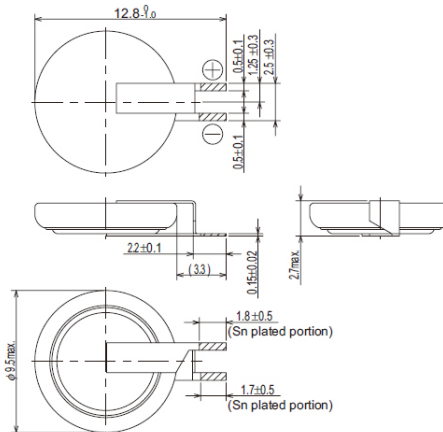


MS Lithium Rechargeable Battery MS920SE


SPECIFICATIONS

Type	MS920SE
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage)(V)	2.8 to 3.3(3.1)
Nominal Capacity(mAh)	11.0
Internal Impedance(Ω)	35
Standard Charge Discharge Current(mA)	0.050
Maximum Discharge Current (Continuous)(mA)	0.80
Cycle Life (Time)100% D.O.D(Depth of Discharge)	100
Cycle Life (Time)20% D.O.D(Depth of Discharge)	1000
Size Diameter(mm)	9.5
Size Height(mm)	2.1
Weight(g)	0.47

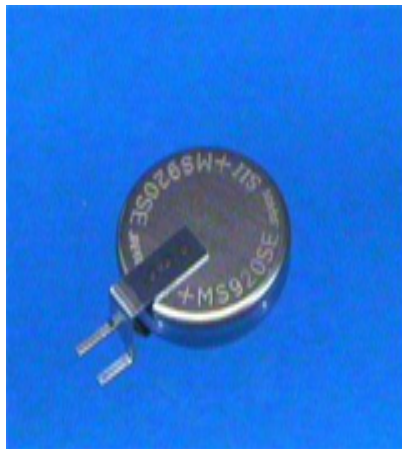


CHARACTERISTICS


Click to enlarge.

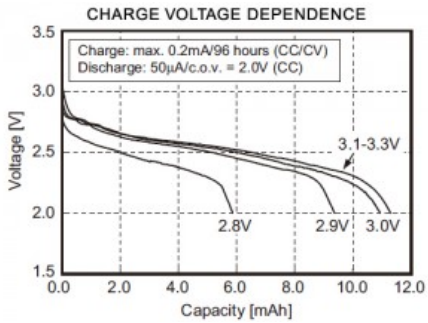


Charge Voltage Dependence

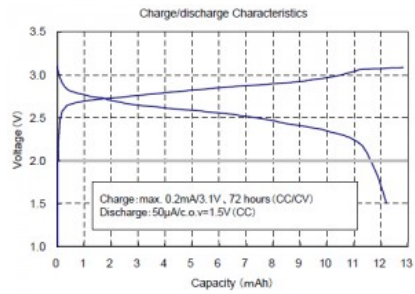


Charge / Discharge Characteristics

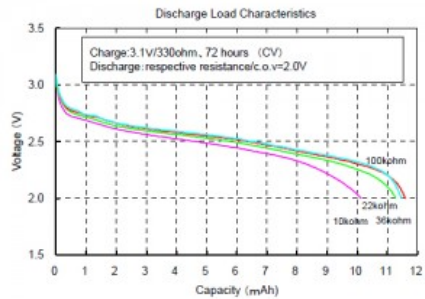


Discharge Load Characteristics

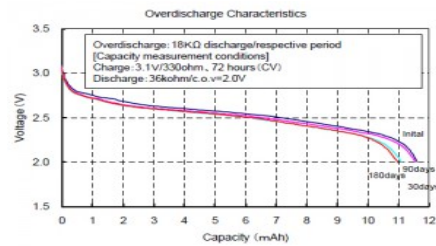


Overdischarge Characteristics

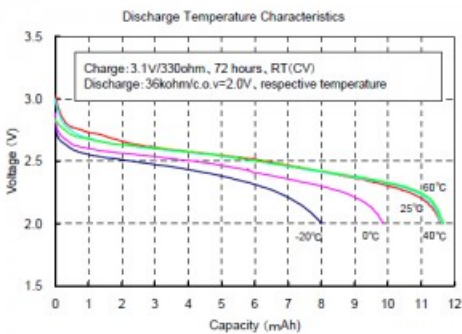

Discharge Temperature Characteristics

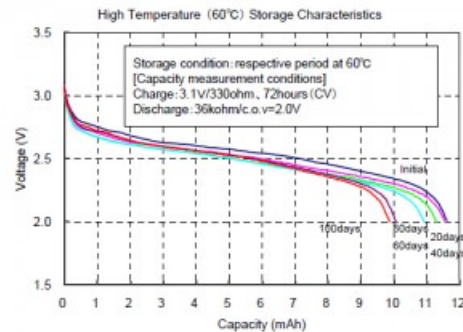

High Temperature (60°C) Storage Characteristics

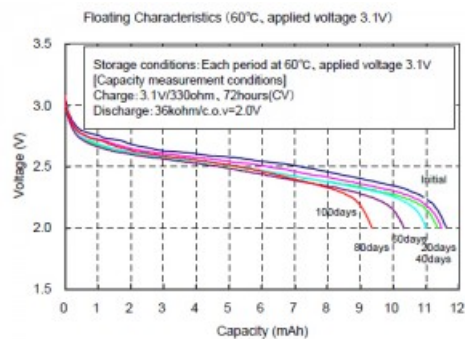

Floating Characteristics (60°C, applied voltage 3.1V)

