

|                       |                                  |
|-----------------------|----------------------------------|
|                       | Page                             |
| <b>Contents</b>       | <b><u><a href="#">5</a></u></b>  |
| <b>Selector Guide</b> | <b><u><a href="#">9</a></u></b>  |
| <b>Index of Types</b> | <b><u><a href="#">17</a></u></b> |

---

|                                      |                                  |
|--------------------------------------|----------------------------------|
| <b>General Technical Information</b> | <b><u><a href="#">19</a></u></b> |
|--------------------------------------|----------------------------------|

---

|                    |                                  |
|--------------------|----------------------------------|
| <b>Data Sheets</b> | <b><u><a href="#">41</a></u></b> |
|--------------------|----------------------------------|

---

|                                                      |                                                               |
|------------------------------------------------------|---------------------------------------------------------------|
| <b>Mounting Instructions</b>                         | <b><u><a href="#">161</a></u></b>                             |
| <b>Quality</b>                                       | <b><u><a href="#">167</a></u></b>                             |
| <b>Environmental Protection, Climatic Conditions</b> | <b><u><a href="#">173</a></u>, <u><a href="#">175</a></u></b> |

---

|                           |                                   |
|---------------------------|-----------------------------------|
| <b>Taping and Packing</b> | <b><u><a href="#">177</a></u></b> |
| <b>Symbols and Terms</b>  | <b><u><a href="#">183</a></u></b> |
| <b>Subject Index</b>      | <b><u><a href="#">185</a></u></b> |

---

# SIEMENS

SCS on the Internet


## Creating new links

As of now you can tie up  
with Passive Components  
and Electron Tubes Group  
plus Siemens Matsushita  
Components on the Internet.  
On our home page under

**<http://www.siemens.de/pr/index.htm>**

you'll find the latest short form cata-  
logs, data books, technical articles  
and more subjects too. You can view  
the documents on-line, or download  
them to your PC. The "Installation"  
menu item tells you how to do it.  
Thanks to the integrated search  
function, you only have to enter key  
terms to go straight to the right  
document. And of course, you can  
get in touch with us direct by E mail  
at any time.

**SCS – dependable, fast and competent**

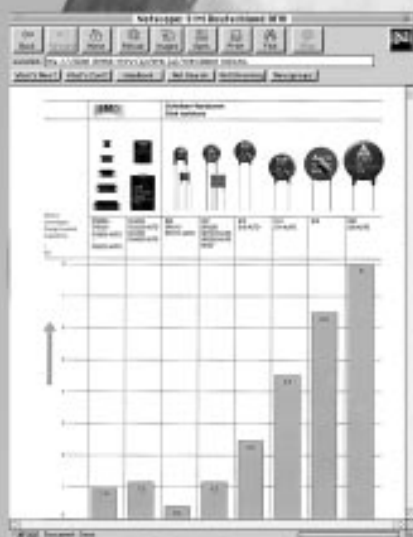

# PTC Thermistors

# SIEMENS

Now order even more


## We've really got things in store

When you need bigger batches than usual, we don't leave you with empty hands. We've pushed up maximum order quantities quite a bit, all of ten times for ceramic chip capacitors for example. But we've got lots more in



store for you, like SCS depots right there in our plants, extra stock with distributors, and experienced sales engineers on the spot around the world. An extensive range of non-SCS components is available too – just contact us.

**SCS – dependable, fast and competent**

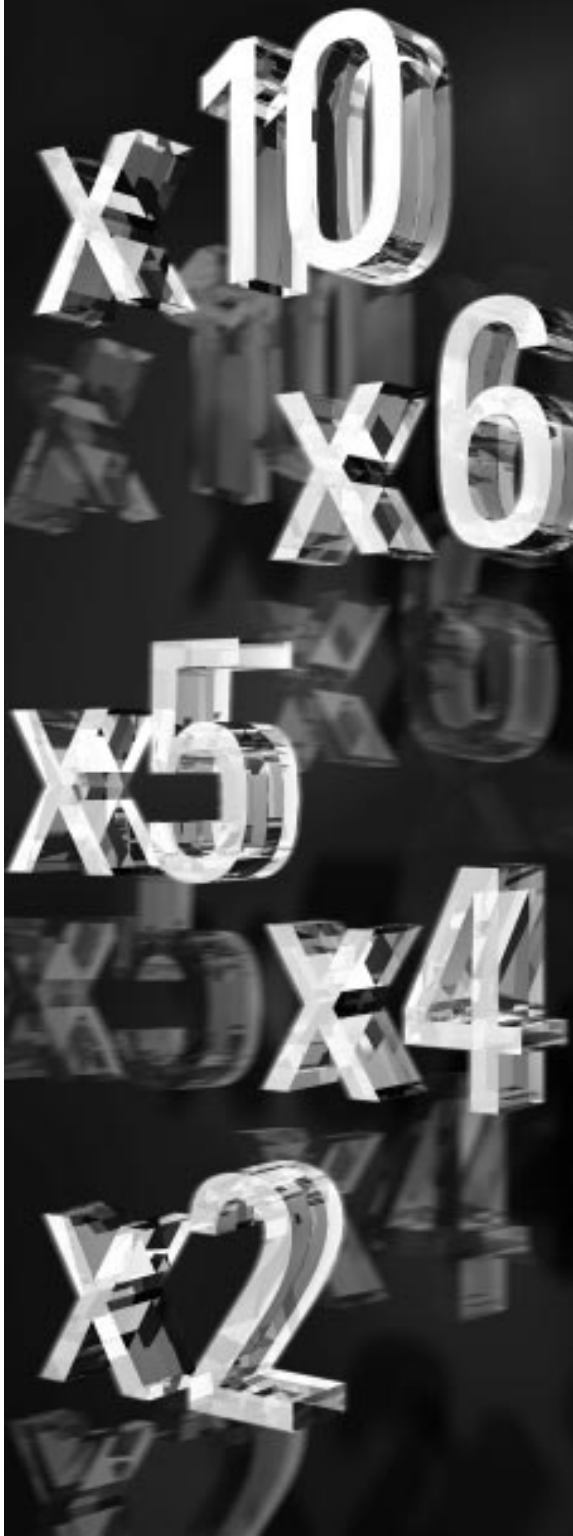

# Contents

|                                                                                                                                                   |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Selector guide</b>                                                                                                                             | <b>9</b>  |
| <b>Index of types</b>                                                                                                                             | <b>17</b> |
| <b>General technical information</b>                                                                                                              | <b>19</b> |
| <b>1 Definition</b>                                                                                                                               | <b>19</b> |
| <b>2 Structure and function</b>                                                                                                                   | <b>19</b> |
| <b>3 Manufacture</b>                                                                                                                              | <b>19</b> |
| <b>4 Characteristics</b>                                                                                                                          | <b>20</b> |
| 4.1 Unloaded PTC thermistors                                                                                                                      | 20        |
| 4.1.1 Temperature dependence of resistance                                                                                                        | 20        |
| 4.1.2 Rated resistance $R_N$                                                                                                                      | 21        |
| 4.1.3 Minimum resistance $R_{\min}$                                                                                                               | 21        |
| 4.1.4 Reference resistance $R_{\text{Ref}}$ at reference temperature $T_{\text{Ref}}$                                                             | 21        |
| 4.1.5 Resistance $R_{\text{PTC}}$ at temperature $T_{\text{PTC}}$                                                                                 | 22        |
| 4.1.6 Temperature coefficient $\alpha$                                                                                                            | 22        |
| 4.1.7 Nominal threshold temperature $T_{\text{NAT}}$                                                                                              | 22        |
| 4.2 Electrically loaded PTC thermistors                                                                                                           | 22        |
| 4.2.1 Surface temperature $T_{\text{surf}}$                                                                                                       | 23        |
| 4.2.2 Current/voltage characteristic                                                                                                              | 23        |
| 4.2.3 Trip current $I_K$                                                                                                                          | 23        |
| 4.2.4 Rated current $I_N$ and switching current $I_S$                                                                                             | 24        |
| 4.2.5 Residual current $I_r$                                                                                                                      | 24        |
| 4.3 Electrical maximum ratings $I_{\max}$ , $I_{\text{Smax}}$                                                                                     | 24        |
| 4.3.1 Maximum operating voltage $V_{\max}$ , rated voltage $V_N$ ,<br>maximum measuring voltage $V_{\text{Meas,max}}$ and breakdown voltage $V_D$ | 24        |
| 4.3.2 Switching time $t_S$                                                                                                                        | 24        |
| 4.3.3 Insulation test voltage $V_{\text{is}}$                                                                                                     | 25        |
| 4.3.4 Pulse strength $V_P$                                                                                                                        | 25        |
| 4.4 Thermal characteristics                                                                                                                       | 25        |
| 4.4.1 Thermal cooling time constant $\tau_c$                                                                                                      | 25        |
| 4.4.2 Thermal threshold time $t_a$                                                                                                                | 25        |
| 4.4.3 Response time $t_R$                                                                                                                         | 25        |
| 4.4.4 Settling time $t_E$                                                                                                                         | 26        |
| <b>5 Notes on operating mode</b>                                                                                                                  | <b>26</b> |
| 5.1 Voltage dependence of resistance                                                                                                              | 26        |
| 5.2 Frequency dependence of resistance                                                                                                            | 27        |
| 5.3 Influence of heat dissipation on PTC temperature                                                                                              | 28        |
| 5.4 Influence of ambient temperature on the $I/V$ characteristic                                                                                  | 28        |
| <b>6 Application notes</b>                                                                                                                        | <b>29</b> |
| 6.1 PTC thermistors for overload protection                                                                                                       | 29        |
| 6.1.1 Operating states of a PTC thermistor for overload protection                                                                                | 30        |
| 6.1.2 Considerations on trip current                                                                                                              | 30        |

# Contents

---

|                                         |                                                                  |            |
|-----------------------------------------|------------------------------------------------------------------|------------|
| 6.1.3                                   | Switching time versus switching current                          | 32         |
| 6.1.4                                   | Selection criteria                                               | 33         |
| 6.1.5                                   | Circuit configuration                                            | 34         |
| 6.2                                     | PTC thermistors for time delay                                   | 35         |
| 6.3                                     | PTC thermistors for motor starting                               | 37         |
| 6.4                                     | PTC thermistors for picture tube degaussing                      | 37         |
| 6.5                                     | PTC thermistors as level sensors                                 | 38         |
| 6.6                                     | PTC thermistors for measurement and control, temperature sensors | 39         |
| 6.7                                     | PTC thermistors as heating elements                              | 40         |
| <b>Data sheets</b>                      |                                                                  | <b>41</b>  |
| <b>Overload protection</b>              |                                                                  | <b>41</b>  |
|                                         | Disks                                                            | 41         |
|                                         | Rods                                                             | 76         |
|                                         | Telecom disks                                                    | 78         |
|                                         | SMDs                                                             | 80         |
| <b>Degaussing</b>                       |                                                                  | <b>88</b>  |
| <b>Switching</b>                        |                                                                  | <b>91</b>  |
| <b>Motor starting</b>                   |                                                                  | <b>100</b> |
| <b>Motor and machine protection</b>     |                                                                  | <b>102</b> |
| <b>Level sensors</b>                    |                                                                  | <b>126</b> |
| <b>Measurement and control</b>          |                                                                  | <b>132</b> |
|                                         | Disks                                                            | 132        |
|                                         | Probe assemblies                                                 | 138        |
|                                         | SMDs                                                             | 148        |
| <b>Heating elements and thermostats</b> |                                                                  | <b>150</b> |
| <b>Mounting instructions</b>            |                                                                  | <b>161</b> |
| <b>1</b>                                | <b>Soldering</b>                                                 | <b>161</b> |
| 1.1                                     | Leaded PTC thermistors                                           | 161        |
| 1.2                                     | Leadless PTC thermistors                                         | 161        |
| 1.3                                     | SMD PTC thermistors                                              | 161        |
| 1.3.1                                   | Wettability test                                                 | 161        |
| 1.3.2                                   | Soldering heat resistance test                                   | 162        |
| 1.3.3                                   | Recommended soldering temperature profiles                       | 162        |
| 1.3.4                                   | Notes                                                            | 164        |
| <b>2</b>                                | <b>Conductive adhesion</b>                                       | <b>164</b> |
| <b>3</b>                                | <b>Clamp contacting</b>                                          | <b>164</b> |

|                                          |                                                    |            |
|------------------------------------------|----------------------------------------------------|------------|
| <b>4</b>                                 | <b>Robustness of terminations</b>                  | <b>164</b> |
| <b>5</b>                                 | <b>Sealing and potting</b>                         | <b>165</b> |
| <b>6</b>                                 | <b>Cleaning</b>                                    | <b>165</b> |
| <b>7</b>                                 | <b>Storage</b>                                     | <b>165</b> |
| <b>Quality</b>                           |                                                    | <b>167</b> |
| <b>1</b>                                 | <b>Manufacturing process and quality assurance</b> | <b>167</b> |
| <b>2</b>                                 | <b>General</b>                                     | <b>168</b> |
| <b>3</b>                                 | <b>Sequence of quality assurance measures</b>      | <b>168</b> |
| 3.1                                      | Incoming inspection                                | 168        |
| 3.2                                      | Process assurance                                  | 168        |
| 3.3                                      | Product assurance                                  | 168        |
| 3.4                                      | Final inspection                                   | 168        |
| <b>4</b>                                 | <b>Delivery quality</b>                            | <b>168</b> |
| <b>5</b>                                 | <b>Sampling inspection</b>                         | <b>169</b> |
| <b>6</b>                                 | <b>Classification of defects</b>                   | <b>169</b> |
| <b>7</b>                                 | <b>AQL values</b>                                  | <b>169</b> |
| <b>8</b>                                 | <b>Incoming inspection by the customer</b>         | <b>170</b> |
| <b>9</b>                                 | <b>Reliability</b>                                 | <b>171</b> |
| <b>10</b>                                | <b>Identification and retraceability</b>           | <b>171</b> |
| <b>11</b>                                | <b>Supplementary information</b>                   | <b>172</b> |
| <b>Environmental protection measures</b> |                                                    | <b>173</b> |
| <b>Climatic conditions</b>               |                                                    | <b>175</b> |
| <b>1</b>                                 | <b>Reliability data</b>                            | <b>175</b> |
| <b>2</b>                                 | <b>Operating temperature range</b>                 | <b>175</b> |
| <b>Taping and packing</b>                |                                                    | <b>177</b> |
| <b>1</b>                                 | <b>Taping of SMD thermistors</b>                   | <b>177</b> |
| <b>2</b>                                 | <b>Taping of radial-lead PTC thermistors</b>       | <b>179</b> |
| <b>3</b>                                 | <b>Packing codes</b>                               | <b>181</b> |
| <b>Symbols and terms</b>                 |                                                    | <b>183</b> |
| <b>Subject index</b>                     |                                                    | <b>185</b> |



Siemens Matsushita Components

Applications with a future

## We set your ideas in motion

When it comes to implementing ideas, you couldn't choose a better partner. Our flexibility turns standard products into new ones with all the right features. Whether capacitors and converter filters for wind-driven power plants, ferrite antennas for radio wrist-watches or SAW filters for the new wide-screen TV generation. If you've got the application, we've got the component.



**SCS – dependable, fast and competent**





# Selector Guide

## PTC thermistors for overload protection

| Type                                                                               |                   | V <sub>max</sub><br>V | I <sub>N</sub><br>mA | I <sub>S</sub><br>mA | T <sub>Ref</sub><br>°C | R <sub>N</sub><br>Ω | Page               |
|------------------------------------------------------------------------------------|-------------------|-----------------------|----------------------|----------------------|------------------------|---------------------|--------------------|
|    | B599*5<br>(C 9*5) | 20                    | 150 ...<br>2900      | 300 ...<br>5700      | 160                    | 0,2 ...<br>13       | <a href="#">41</a> |
|                                                                                    | B599*5<br>(C 9*5) | 30                    | 120 ...<br>2500      | 240 ...<br>5000      | 120                    | 0,2 ...<br>13       | <a href="#">44</a> |
|                                                                                    | B599*0<br>(C 9*0) | 54                    | 55 ...<br>1150       | 120 ...<br>2370      | 160                    | 0,9 ...<br>55       | <a href="#">47</a> |
|                                                                                    | B599*0<br>(C 9*0) | 80                    | 30 ...<br>530        | 60 ...<br>1100       | 80                     | 0,9 ...<br>55       | <a href="#">50</a> |
|                                                                                    | B599*0<br>(C 9*0) | 80                    | 50 ...<br>1000       | 100 ...<br>2000      | 120                    | 0,9 ...<br>55       | <a href="#">53</a> |
|   | B598*0<br>(C 8*0) | 160                   | 35 ...<br>800        | 70 ...<br>1600       | 160                    | 2,6 ...<br>150      | <a href="#">56</a> |
|                                                                                    | B598*0<br>(C 8*0) | 265                   | 15 ...<br>350        | 40 ...<br>710        | 80                     | 2,6 ...<br>150      | <a href="#">59</a> |
|                                                                                    | B598*1<br>(C 8*1) | 265                   | 30 ...<br>730        | 65 ...<br>1450       | 135                    | 2,6 ...<br>150      | <a href="#">62</a> |
|                                                                                    | B598**<br>(C 8**) | 265 ...<br>550        | 12 ...<br>650        | 24 ...<br>1300       | 120                    | 2,6 ...<br>1500     | <a href="#">65</a> |
|  | B597**<br>(B 7**) | 420 ...<br>1000       | 8 ...<br>123         | 17 ...<br>245        | 110 ...<br>120         | 25 ...<br>7500      | <a href="#">71</a> |

## PTC thermistors for overload protection

| Type                                                                              |                   | $V_{max}$<br>V | $I_N$<br>mA  | $I_S$<br>mA   | $T_{Ref}$<br>°C | $R_N$<br>$\Omega$ | Page               |
|-----------------------------------------------------------------------------------|-------------------|----------------|--------------|---------------|-----------------|-------------------|--------------------|
|  | B5940*<br>(B 40*) | 500 ...<br>550 | 2,5 ...<br>4 | 6,5 ...<br>12 | 60              | 3500 ...<br>5500  | <a href="#">76</a> |

## Telecom PTC thermistors

|                                                                                     |                    |     |               |                |         |               |                    |
|-------------------------------------------------------------------------------------|--------------------|-----|---------------|----------------|---------|---------------|--------------------|
|   | B5902*<br>(S 102*) | 245 | 55 ...<br>200 | 110 ...<br>400 | 120     | 10 ...<br>70  | <a href="#">78</a> |
|  | B59707<br>(A 1707) | 80  | 45            | 90             | 120     | 125           | <a href="#">80</a> |
|  | B59607<br>(A 1607) | 80  | 65            | 130            | 120     | 55            | <a href="#">80</a> |
|  | B59*01<br>(P 1*01) | 30  | 90 ...<br>310 | 185 ...<br>640 | 85; 130 | 3,1 ...<br>13 | <a href="#">82</a> |
|  | B59*15<br>(P 1*15) | 80  | 40 ...<br>150 | 85 ...<br>310  | 80; 120 | 16 ...<br>55  | <a href="#">85</a> |

PTC thermistors for picture tube degaussing

| Type |                    | $V_{max}$<br>V | $I_{in}$<br>$A_{pp}$ | $I_r$<br>$mA_{pp}$ | $R_N$<br>$\Omega$ | $R_{coil}$<br>$\Omega$ | Page               |
|------|--------------------|----------------|----------------------|--------------------|-------------------|------------------------|--------------------|
|      | B59250<br>(C 1250) | 265            | $\geq 11$            | $\leq 22,5$        | 25                | 25                     | <a href="#">88</a> |
|      | B59450<br>(C 1450) | 265            | $\geq 20$            | $\leq 30$          | 18                | 12                     | <a href="#">88</a> |
|      | B59250<br>(T250)   | 265            | $\geq 10$            | $\leq 4$           | 28<br>(typ.)      | 25                     | <a href="#">89</a> |
|      | B59170<br>(T170)   | 265            | $\geq 16$            | $\leq 4$           | 18<br>(typ.)      | 17                     | <a href="#">89</a> |
|      | B59100<br>(T100)   | 265            | $\geq 20$            | $\leq 15$          | 22<br>(typ.)      | 10                     | <a href="#">89</a> |
|      |                    |                |                      |                    |                   |                        |                    |

Switching PTC thermistors

| Type |                                         | $V_{max}$<br>V | $I_N$<br>mA  | $I_S$<br>mA   | $T_{Ref}$<br>$^{\circ}C$ | $R_N$<br>$\Omega$ | Page               |
|------|-----------------------------------------|----------------|--------------|---------------|--------------------------|-------------------|--------------------|
|      | B5911*<br>(C 111*)                      | 265            | 15 ...<br>55 | 40 ...<br>110 | 80; 120                  | 70; 150           | <a href="#">91</a> |
|      | B59xx0<br>(J 150)<br>(J 200)<br>(J 320) | 265            | 24 ...<br>35 | 50 ...<br>70  | 120                      | 150 ...<br>320    | <a href="#">93</a> |
|      | B59339<br>(J 2**)                       | 80 ...<br>265  | 8 ...<br>77  | 16 ...<br>150 | 115 ...<br>130           | 32 ...<br>1500    | <a href="#">94</a> |
|      | B593**<br>(J 29)                        | 265            | 7 ...<br>14  | 15 ...<br>30  | 115 ...<br>190           | 5000              | <a href="#">98</a> |

# Selector Guide

## PTC thermistors for motor starting

| Type                                                                                                                                                                |                                                   | $V_{max}$<br>V | $I_{max}$<br>mA | $T_{Ref}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|----------------|-----------------|-----------------|-------------------|---------------------|
|   | B5919*; B5921*<br>(A 19*, A 21*,<br>J 19*, J 21*) | 175 ...<br>400 | 4 ...<br>8      | 120; 135        | 4,7 ...<br>33     | <a href="#">100</a> |
|                                                                                                                                                                     |                                                   |                |                 |                 |                   |                     |

## PTC thermistors for motor and machine protection

| Type                                                                                |                    | $V_{max}$<br>V | $T_{NAT}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|-------------------------------------------------------------------------------------|--------------------|----------------|-----------------|-------------------|---------------------|
|   | B59100<br>(M 1100) | 25             | 60 ... 190      | $\leq 100$        | <a href="#">102</a> |
|                                                                                     | B59135<br>(M 135)  | 30             | 60 ... 180      | $\leq 250$        | <a href="#">106</a> |
|                                                                                     | B59155<br>(M 155)  | 30             | 60 ... 180      | $\leq 100$        | <a href="#">110</a> |
|  | B59300<br>(M 1300) | 25             | 60 ... 190      | $\leq 300$        | <a href="#">114</a> |
|                                                                                     | B59335<br>(M 335)  | 30             | 60 ... 180      | $\leq 750$        | <a href="#">118</a> |
|                                                                                     | B59355<br>(M 355)  | 30             | 60 ... 180      | $\leq 300$        | <a href="#">122</a> |

PTC thermistors as level sensors

| Type                                                                              |                    | $V_{\max}$<br>V | $I_{r, \text{ oil}}$<br>mA | $I_{r, \text{ air}}$<br>mA | $rS$<br>s | $R_N$<br>$\Omega$ | Page                |
|-----------------------------------------------------------------------------------|--------------------|-----------------|----------------------------|----------------------------|-----------|-------------------|---------------------|
|  | Q63100<br>(E 11)   | 24              | $\geq 45$                  | $\leq 35,5$                | 2         | 140               | <a href="#">126</a> |
|                                                                                   | B59020<br>(E 1020) | 24              | $\geq 41,7$                | $\leq 26,7$                | 2         | 135               | <a href="#">128</a> |
|  | B59010<br>(D 1010) | 24              | $\geq 45$                  | $\leq 33,5$                | 2         | 100 ...<br>200    | <a href="#">130</a> |

PTC thermistors for measurement and control

| Type                                                                                |                    | $V_{\max}$<br>V | $I_{\max}$<br>mA | $T_{\text{Ref}}$<br>$^{\circ}\text{C}$ | $R_N$<br>$\Omega$  | Page                |
|-------------------------------------------------------------------------------------|--------------------|-----------------|------------------|----------------------------------------|--------------------|---------------------|
|  | B59011<br>(C 1011) | 30              | 45 ...<br>430    | - 30 ...<br>180                        | 110 ...<br>> 100 k | <a href="#">132</a> |
|                                                                                     | B59012<br>(C 1012) | 265             | 300              | 40 ...<br>180                          | 80 ...<br>130      | <a href="#">134</a> |
|                                                                                     | B59013<br>(C 1013) | 265             | 1000             | 40 ...<br>180                          | 27 ...<br>46       | <a href="#">136</a> |

PTC thermistors for measurement and control

| Type                                                                               |                   | $V_{\max}$<br>V | $T_{\text{NAT}}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|------------------------------------------------------------------------------------|-------------------|-----------------|------------------------|-------------------|---------------------|
|   | B59008<br>(C 8)   | 30              | 60 ...<br>180          | $\leq 250$        | <a href="#">138</a> |
|  | B59100<br>(C 100) | 30              | 60 ...<br>180          | $\leq 100$        | <a href="#">140</a> |

| Type                                                                                |                   | $V_{\max}$<br>V | $I_{\max}$<br>mA | $T_{\text{Ref}}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|-------------------------------------------------------------------------------------|-------------------|-----------------|------------------|------------------------|-------------------|---------------------|
|  | B59401<br>(D 401) | 20              | 175 ...<br>270   | 40 ...<br>120          | 80 ...<br>130     | <a href="#">142</a> |

PTC thermistors for measurement and control

| Type                                                                               |                    | $V_{\max}$<br>V | $T_{\text{NAT}}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|------------------------------------------------------------------------------------|--------------------|-----------------|------------------------|-------------------|---------------------|
|   | B59801<br>(D 801)  | 30              | 60 ...<br>160          | $\leq 100$        | <a href="#">144</a> |
|   | B59901<br>(D 901)  | 30              | 60 ...<br>140          | $\leq 100$        | <a href="#">146</a> |
|  | B59701<br>(A 1701) | 25              | 90 ...<br>130          | $\leq 1000$       | <a href="#">148</a> |

PTC thermistors as heating elements and thermostats

| Type                                                                              |                    | $V_N$<br>V | $T_{Ref}$<br>°C | $R_N$<br>$\Omega$ | Page                |
|-----------------------------------------------------------------------------------|--------------------|------------|-----------------|-------------------|---------------------|
|  | B59060<br>(A 60)   | 12         | 0 ... 280       | 9 ... $\geq 320$  | <a href="#">150</a> |
|                                                                                   | B59053<br>(A 53)   | 230        | 50 ... 270      | 4200 ... 6000     | <a href="#">152</a> |
|                                                                                   | B59066<br>(A 66)   | 220        | 50 ... 270      | 1200; 1700        | <a href="#">154</a> |
|  | B59042<br>(R 1042) | 12         | 40 ... 280      | 3,2 ... 12,8      | <a href="#">156</a> |
|                                                                                   | B59102<br>(R 102)  | 230        | 50 ... 290      | 700 ... 1300      | <a href="#">158</a> |



# Index of Types

| Type     | Page       | Type     | Page       |
|----------|------------|----------|------------|
| <b>A</b> |            | C 873    | 66         |
| A 53     | 154        | C 874    | 66         |
| A 60     | 150        | C 875    | 66         |
| A 66     | 156        | C 880    | 56, 59, 66 |
| A 192    | 100        | C 881    | 62         |
| A 196    | 100        | C 883    | 66         |
| A 501    | 100        | C 884    | 66         |
| A 502    | 100        | C 885    | 66         |
| A 1607   | 80         | C 886    | 66         |
| A 1701   | 148        | C 890    | 56, 59, 66 |
| A 1707   | 80         | C 891    | 62         |
|          |            | C 910    | 47, 50, 53 |
| <b>B</b> |            | C 915    | 41, 44     |
| B 404    | 76         | C 930    | 47, 50, 53 |
| B 406    | 76         | C 935    | 41, 44     |
| B 750    | 71         | C 940    | 47, 50, 53 |
| B 751    | 71         | C 945    | 41, 44     |
| B 752    | 71         | C 950    | 47, 50, 53 |
| B 753    | 71         | C 955    | 41, 44     |
| B 754    | 71         | C 960    | 47, 50, 53 |
| B 755    | 71         | C 965    | 41, 44     |
| B 758    | 71         | C 970    | 47, 50, 53 |
| B 770    | 71         | C 975    | 41, 44     |
| B 771    | 71         | C 980    | 47, 50, 53 |
| B 772    | 71         | C 985    | 41, 44     |
| B 773    | 71         | C 990    | 47, 50, 53 |
| B 774    | 71         | C 995    | 41, 44     |
|          |            | C 1011   | 132        |
| <b>C</b> |            | C 1012   | 134        |
| C 8      | 138        | C 1013   | 136        |
| C 100    | 140        | C 1118   | 91         |
| C 810    | 56, 59, 66 | C 1119   | 91         |
| C 811    | 62         | C 1250   | 88         |
| C 830    | 56, 59, 66 | C 1450   | 88         |
| C 831    | 62         |          |            |
| C 840    | 56, 59, 66 | <b>D</b> |            |
| C 841    | 62         | D 401    | 142        |
| C 850    | 56, 59, 66 | D 801    | 144        |
| C 851    | 62         | D 901    | 146        |
| C 860    | 56, 59, 66 | D 1010   | 130        |
| C 861    | 62         |          |            |
| C 870    | 56, 59, 66 | <b>E</b> |            |
| C 871    | 62         | E 11     | 126        |
| C 872    | 66         | E 1020   | 128        |

# Index of Types

---

| Type     | Page | Type        | Page |
|----------|------|-------------|------|
| <b>J</b> |      | <b>R</b>    |      |
| J 29     | 98   | R 102       | 158  |
| J 150    | 93   | R 1042-A40  | 152  |
| J 200    | 93   | R 1042-A60  | 152  |
| J 280    | 94   | R 1042-A80  | 152  |
| J 281    | 94   | R 1042-A120 | 152  |
| J 282    | 94   | R 1042-A160 | 152  |
| J 283    | 94   | R 1042-A180 | 152  |
| J 284    | 94   | R 1042-A220 | 152  |
| J 285    | 94   | R 1042-A280 | 152  |
| J 286    | 94   |             |      |
| J 287    | 94   | <b>S</b>    |      |
| J 288    | 94   | S 1022      | 78   |
| J 289    | 94   | S 1023      | 78   |
| J 290    | 94   | S 1024      | 78   |
| J 320    | 93   | S 1025      | 78   |
| J 501    | 100  |             |      |
| J 502    | 100  | <b>T</b>    |      |
|          |      | T 100       | 89   |
| <b>M</b> |      | T 170       | 89   |
| M 135    | 110  | T 250       | 89   |
| M 155    | 118  |             |      |
| M 335    | 114  |             |      |
| M 355    | 122  |             |      |
| M 1100   | 102  |             |      |
| M 1300   | 106  |             |      |
|          |      |             |      |
| <b>P</b> |      |             |      |
| P 1101   | 82   |             |      |
| P 1115   | 85   |             |      |
| P 1201   | 82   |             |      |
| P 1215   | 85   |             |      |
| P 1301   | 82   |             |      |
| P 1315   | 85   |             |      |

## General Technical Information

### 1 Definition

A PTC thermistor is a thermally sensitive semiconductor resistor. Its resistance value rises sharply with increasing temperature after a defined temperature (reference temperature) has been exceeded.

The very high positive temperature coefficient (PTC) has given the PTC thermistor its name.


Applicable standards are CECC 44000, EN 144 000, IEC 738-1 and DIN 44 080.

### 2 Structure and function

PTC thermistors are made of doped polycrystalline ceramic on the basis of barium titanate. Generally, ceramic is known as a good insulating material with a high resistance. Semiconduction and thus a low resistance are achieved by doping the ceramic with materials of a higher valency than that of the crystal lattice. Part of the barium and titanate ions in the crystal lattice is replaced with ions of higher valencies to obtain a specified number of free electrons which make the ceramic conductive.

The material structure is composed of many individual crystallites (figure 1) which are responsible for the PTC thermistor effect, i.e. the abrupt rise in resistance. At the edge of these monocrystallites, the so-called grain boundaries, potential barriers are formed. They prevent free electrons from diffusing into adjacent areas. Thus a high resistance results. However, this effect is neutralized at low temperatures. High dielectric constants and sudden polarization at the grain boundaries prevent the formation of potential barriers at low temperatures enabling a smooth flow of free electrons.

Above the Curie temperature dielectric constant and polarization decline so far that there is a strong growth of the potential barriers and hence of resistance. Beyond the range of the positive temperature coefficient  $\alpha$  the number of free charge carriers is increased by thermal activation. The resistance then decreases and exhibits a negative temperature characteristic (NTC) typical of semiconductors.

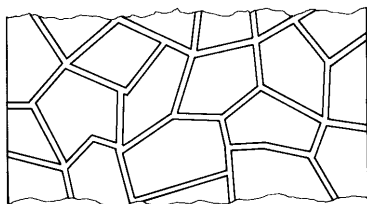

$$\leftarrow R_{\text{PTC}} = R_{\text{grain}} + R_{\text{grain boundary}}$$

$$R_{\text{grain boundary}} = f(T)$$

TPT0315-9

Figure 1

Schematic representation of the polycrystalline structure of a PTC thermistor.

The PTC resistance  $R_{\text{PTC}}$  is composed of individual crystal and grain boundary resistances. The grain boundary resistance is strongly temperature-dependent.

### 3 Manufacture

Mixtures of barium carbonate, titanium oxide and other materials whose composition produces the desired electrical and thermal characteristics are ground, mixed and compressed into disks, washers, rods, slabs or tubular shapes depending on the application.

These blank bodies are then sintered, preferably at temperatures below 1400 °C. Afterwards, they are carefully contacted, provided with connection elements depending on the version and finally coated or encased.

A flow chart in the quality section of this book ([see page 167](#)) shows the individual processing steps in detail. The chart also illustrates the extensive quality assurance measures taken during manufacture to guarantee the constantly high quality level of our thermistors.

## 4 Characteristics

A current flowing through a thermistor may cause sufficient heating to raise the thermistor's temperature above the ambient. As the effects of self-heating are not always negligible, a distinction has to be made between the characteristics of an electrically loaded thermistor and those of an unloaded thermistor. The properties of an unloaded thermistor are also termed "zero-power characteristics".

### 4.1 Unloaded PTC thermistors

#### 4.1.1 Temperature dependence of resistance

The zero-power resistance value  $R_T$  is the resistance value measured at a given temperature  $T$  with the electrical load kept so small that there is no noticeable change in the resistance value if the load is further reduced.

For test voltages, please refer to the individual types (mostly  $\leq 1,5$  V).

Figure 2 shows the typical dependence of the zero-power resistance on temperature. Because of the abrupt rise in resistance (the resistance value increases by several powers of ten), the resistance value is plotted on a logarithmic scale (ordinate) against a linear temperature scale (abscissa).

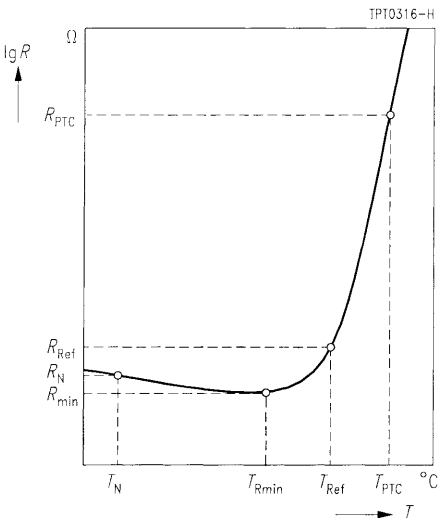


Figure 2

Typical resistance/temperature characteristic

$$R_{PTC} = f(T_{PTC})$$

$R_N$  Rated PTC resistance  
(resistance value at  $T_N \triangleq 25$  °C)

$R_{min}$  Minimum resistance  
(resistance value at  $T_{Rmin}$ )

$T_{Rmin}$  Temperature at  $R_{min}$   
( $\alpha$  becomes positive)

$R_{Ref}$  Reference resistance  
(resistance value at  $T_{Ref}$ )

$T_{Ref}$  Reference temperature  
(resistance rises sharply)

$R_{PTC}$  Resistance in the steep region

$T_{PTC}$  Temperature for which  $R_{PTC}$   
is guaranteed

The tolerances in figure 3 are provided for PTC thermistors which must have an exactly defined zero-power resistance curve.

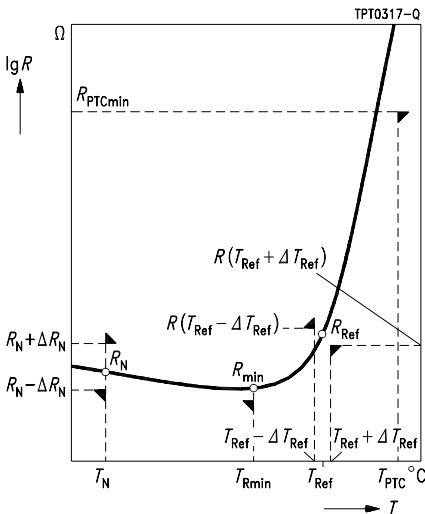


Figure 3

Variation of PTC resistance

$R_{PTC} = f(T_{PTC})$  (tolerance diagram)

$R_N$  Rated resistance  
Resistance value at  $T_N$  with specified tolerance  $\pm \Delta R_N$

$R_{min}$  Minimum resistance value  
at  $T_{Rmin}$

$R_{Ref}$  Resistance value at  $T_{Ref}$

$R(T_{Ref} - \Delta T_{Ref})$  Resistance value at  
 $T_{Ref} - \Delta T_{Ref}$

$R(T_{Ref} + \Delta T_{Ref})$  Resistance value at  
 $T_{Ref} + \Delta T_{Ref}$

$T_{Ref} \pm \Delta T_{Ref}$  Reference temperature  
with  $\pm$  tolerances

$R_{PTCmin}$  Minimum resistance value  
at  $T_{PTC}$

## 4.1.2 Rated resistance $R_N$

The rated resistance  $R_N$  is the resistance value at temperature  $T_N$ . PTC thermistors are classified according to this resistance value. The temperature  $T_N$  is 25 °C, unless otherwise specified.

## 4.1.3 Minimum resistance $R_{min}$

The beginning of the temperature range with a positive temperature coefficient is specified by the temperature  $T_{Rmin}$ . The value of the PTC resistance at this temperature is designated as  $R_{min}$ . This is the lowest zero-power resistance value which the PTC thermistor is able to assume.  $R_{min}$  is often given as a calculable magnitude without stating the corresponding temperature. The  $R_{min}$  values specified in this data book allow for the  $R$  tolerance range of the individual types and represent the lower limit.

## 4.1.4 Reference resistance $R_{Ref}$ at reference temperature $T_{Ref}$

The start of the steep rise in resistance, marked by the reference temperature  $T_{Ref}$ , which corresponds approximately to the ferroelectric Curie point, is significant for the application. For the individual types of PTC thermistors it is defined as the temperature at which the zero-power resistance is equal to the value  $R_{Ref} = 2 \cdot R_{min}$ .

### 4.1.5 Resistance $R_{PTC}$ at temperature $T_{PTC}$

This point on the  $R_{PTC} = f(T_{PTC})$  characteristic is typical of a resistance in the steep region of the curve. The resistance value  $R_{PTC}$  is the zero-power resistance value at the temperature  $T_{PTC}$ . For the individual types  $R_{PTC}$  is specified as a minimum value.

### 4.1.6 Temperature coefficient $\alpha$

The temperature coefficient of resistance  $\alpha$  is defined as the relative change in resistance referred to the change in temperature and can be calculated for each point on the  $R/T$  curve by:

$$\alpha = \frac{1}{R} \cdot \frac{dR}{dT} = \frac{d \ln R}{dT} = \ln 10 \cdot \frac{d \lg R}{dT}$$

In the range of the steep rise in resistance between  $R_{Ref}$  und  $R_{PTC}$ ,  $\alpha$  may be regarded as being approximately constant. The following relation then applies:

$$R_{PTC} \leq R_1, R_2 \leq R_{PTC} \rightarrow \alpha = \frac{\ln\left(\frac{R_2}{R_1}\right)}{T_2 - T_1}$$

Within this temperature range, the reverse relation can be equally applied:

$$R_2 = R_1 \cdot e^{\alpha \cdot (T_2 - T_1)}$$

The values of  $\alpha$  for the individual types relate only to the temperature range in the steep region of the resistance curve, which is of primary interest for applications.

### 4.1.7 Nominal threshold temperature $T_{NAT}$

For certain PTC types the pair of values  $T_{NAT}$ ,  $R_{NAT}$  is specified instead of  $T_{Ref}$ ,  $R_{Ref}$ . The temperature relating to a defined resistance value in the steep region of the curve is given as the **nominal threshold temperature**  $T_{NAT}$ .

## 4.2 Electrically loaded PTC thermistors

When a current flows through the thermistor, the device will heat up more or less by power dissipation. This self-heating effect depends not only on the load applied, but also on the thermal dissipation factor  $\delta$  and the geometry of the thermistor itself. Self-heating of a PTC thermistor resulting from an electrical load can be calculated as follows:

$$P = \frac{dH}{dt} = \delta \cdot (T - T_{amb}) + C_{th} \cdot \frac{dT}{dt}$$

$P$  Power applied to PTC

$V$  Instantaneous value of PTC voltage

$I$  Instantaneous value of PTC current

$dH/dt$  Change of stored heating energy over time

|          |                                  |
|----------|----------------------------------|
| $\delta$ | Dissipation factor of PTC        |
| $T$      | Instantaneous temperature of PTC |
| $T_A$    | Ambient temperature              |
| $C_{th}$ | Heat capacity of PTC             |
| $dT/dt$  | Change of temperature over time  |

## 4.2.1 Surface temperature $T_{surf}$

$T_{surf}$  is the temperature reached on the thermistor's surface when it has been operated at specified rated voltage and in a state of thermal equilibrium with the ambient for a prolonged period of time. The specifications in the data sheet section refer to an ambient temperature of 25 °C.

## 4.2.2 Current/voltage characteristic

The properties of electrically loaded PTC thermistors (in self-heated mode) are better described by the  $I/V$  characteristic than by the  $R/T$  curve. It illustrates the relationship between voltage and current in a thermally steady state in still air at 25 °C, unless another temperature is specified.

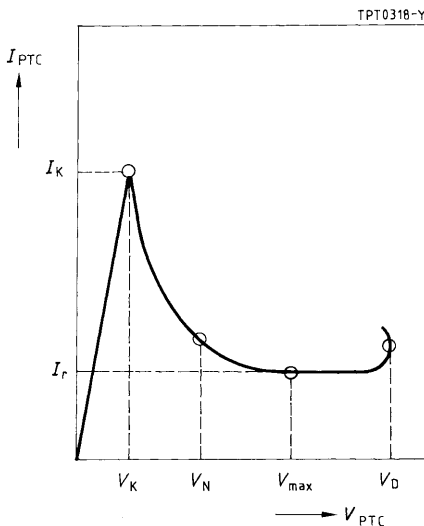


Figure 4

$I/V$  characteristic of a PTC thermistor

|           |                                                                        |
|-----------|------------------------------------------------------------------------|
| $I_K$     | Trip current at applied voltage $V_K$<br>(start of current limitation) |
| $I_r$     | Residual current at applied voltage $V_{max}$<br>(current is balanced) |
| $V_{max}$ | Maximum operating voltage                                              |
| $V_N$     | Rated voltage ( $V_N < V_{max}$ )                                      |
| $V_D$     | Breakdown voltage ( $V_D > V_{max}$ )                                  |

## 4.2.3 Trip current $I_K$

The trip current  $I_K$  is the current flowing through the thermistor at an applied voltage  $V_K$ . It is the current at which the electrical power consumed is high enough to raise the temperature of the device above the reference temperature  $T_{Ref}$ .

### 4.2.4 Rated current $I_N$ and switching current $I_S$

The tolerance range of the trip current depends on the mechanical and electrical component tolerances. Knowing the tolerance limits is decisive in selecting the most suitable PTC thermistor. In practical use it is important to know at which current the PTC thermistor is *guaranteed* not to trip and at which currents the thermistor will *reliably* go into high-resistance mode. For this reason we do not specify the trip current in general, but its lower limit  $I_N$  and its upper limit  $I_S$ .

**Rated current  $I_N$ :** At currents  $\leq I_N$ , the PTC thermistor reliably remains in low-resistance mode.

**Switching current  $I_S$ :** At currents  $\geq I_S$  the PTC thermistor reliably goes into high-resistance mode.

The currents specified in the data sheets refer to  $T_A = 25^\circ\text{C}$ .

### 4.2.5 Residual current $I_r$

The residual current  $I_r$  is the current developed at applied maximum operating voltage  $V_{\max}$  and at thermal equilibrium (steady-state operation).

### 4.3 Electrical maximum ratings $I_{\max}$ , $I_{S\max}$

In electrically loaded PTC thermistors electrical power is converted into heat. The high loads generated for a short period of time during the heating phase (the PTC thermistor is in low-resistance mode when the operating voltage is applied) are limited by the specification of maximum permissible currents  $I_{\max}$ ,  $I_{S\max}$  and voltages  $V_{\max}$  in the data sheet section.

The number of heating processes is also an important criterion. The permissible number of switching cycles not affecting function or service life is given in the data sheets and applies to operation at specified maximum loads.

#### 4.3.1 Maximum operating voltage $V_{\max}$ , rated voltage $V_N$ , maximum measuring voltage $V_{\text{Meas,max}}$ and breakdown voltage $V_D$

The **maximum operating voltage  $V_{\max}$**  is the highest voltage which may be continuously applied to the thermistor at the ambient temperatures specified in the data sheets (still air, steady-state, high-resistance mode). For types without  $V_{\max}$  specification (e.g. heating elements) the permissible maximum voltage is  $V_N + 15\%$ .

The **rated voltage  $V_N$**  is the supply voltage lying below  $V_{\max}$ .

The **maximum measuring voltage  $V_{\text{Meas,max}}$**  is the highest voltage that may be applied to the thermistor for measuring purposes.

The **breakdown voltage  $V_D$**  is a measure for the thermistor's maximum voltage handling capability. Beyond  $V_D$  the PTC thermistor no longer exhibits its characteristic properties.

Switching current, operating current or minimum series resistances are specified to ensure that the PTC thermistor will not be overloaded.

#### 4.3.2 Switching time $t_S$

If  $V_{\max}$  and  $I_{\max}$  are known, it is possible to describe the PTC thermistor's switch-off behavior in terms of switching time  $t_S$ . This is the time it takes at applied voltage for the current passing through the PTC to be reduced to half of its initial value. The  $t_S$  values apply to  $T_A = 25^\circ\text{C}$ .



#### 4.3.3 Insulation test voltage $V_{is}$

The insulation test voltage  $V_{is}$  is applied between the body of the thermistor and its encapsulation for a test period of 5 seconds.

#### 4.3.4 Pulse strength $V_p$

The pulse strength is specified on the basis of the standardized voltage pulses shown in figure 5. Voltage transients within the stated number of cycles and amplitude will not damage the component.

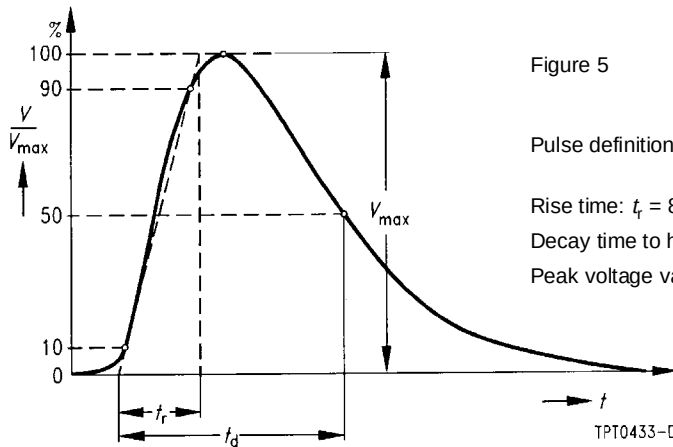


Figure 5

Pulse definition as per IEC 60-2  
VDE 0433

Rise time:  $t_r = 8 \mu s$

Decay time to half value:  $t_d = 20 \mu s$

Peak voltage value: refer to individual type

### 4.4 Thermal characteristics

#### 4.4.1 Thermal cooling time constant $\tau_c$

The thermal cooling time constant refers to the time necessary for an unloaded thermistor to vary its temperature by 63,2 % of the difference between its mean temperature and the ambient temperature.

Equation for temperature change:  $T(t_2) = T(t_1) \pm 0,0632 (T(t_1) - T_A)$  with  $t_2 - t_1 = \tau_{th}$

#### 4.4.2 Thermal threshold time $t_a$

The thermal threshold time  $t_a$  is the time an unloaded PTC thermistor needs to increase its temperature from starting temperature (25 °C) to reference temperature  $T_{Ref}$  or nominal threshold temperature  $T_{NAT}$  (resistance 1330  $\Omega$ ) by external heating.

#### 4.4.3 Response time $t_R$

The response time  $t_R$  is the time a PTC thermistor requires to recognize the change of power dissipation resulting from a change of the surrounding medium at applied voltage. After this period of time the residual currents assigned to the individual media become effective in the device.

## 4.4.4 Settling time $t_E$

The settling time  $t_E$  refers to the time the PTC thermistor needs to reach operating condition after the operating voltage has been applied (only for level sensors).

## 5 Notes on operating mode

### 5.1 Voltage dependence of resistance

The  $R/T$  characteristic shows the relationship between resistance and temperature at zero power, i.e. when self-heating of the PTC thermistor is negligible.

The resistance of the PTC thermistor is composed of the grain resistance and the grain boundary transition resistance. Particularly in the hot state, the strong potential barriers are determining resistance. Higher voltages applied to the PTC thermistor therefore drop primarily at the grain boundaries with the result that the high field strengths dominating here produce a break-up of the potential barriers and thus a lower resistance. The stronger the potential barriers are, the greater is the influence of this "varistor effect" on resistance. Below the reference temperature, where the junctions are not so marked, most of the applied voltage is absorbed by the grain resistance. Thus the field strength at the grain boundaries decreases and the varistor effect is quite weak.

Figure 6 shows the typical dependence of resistance on field strength. It can be seen that the difference in resistance is largest between  $R(E_1)$ ,  $R(E_2)$  and  $R(E_3)$  at temperature  $T_{\max}$  and thus in the region of maximum resistance. (Note:  $R_{PTC}$  is plotted on a logarithmic scale.)

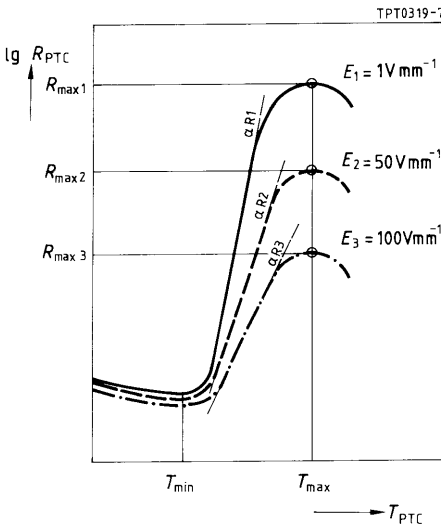


Figure 6

Influence of field strength  $E$  on the  $R/T$  characteristic (varistor effect)  
 $\alpha_{R1} > \alpha_{R2} > \alpha_{R3}$

Due to this dependence on the positive temperature coefficient of the field strength, operation on high supply voltages is only possible with PTC thermistors that have been designed for this purpose by means of appropriate technological (grain size) and constructional (device thickness) measures.

The  $R/T$  curves in the data sheet section are zero-power characteristics.

## 5.2 Frequency dependence of resistance

Due to the structure of the PTC thermistor material the PTC thermistor on ac voltage is not a purely ohmic resistor. It also acts as a capacitive resistor because of the grain boundary junctions (see equivalent circuit diagram, figure 7).

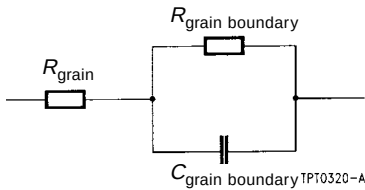


Figure 7

Equivalent circuit diagram of a PTC thermistor on ac voltage

The impedance measured at ac voltage decreases with increasing frequency. The dependence of the PTC resistance on temperature at different frequencies is shown in figure 8. So the use of the PTC thermistor in the AF and RF ranges is not possible, meaning that applications are restricted to dc and line frequency operation.

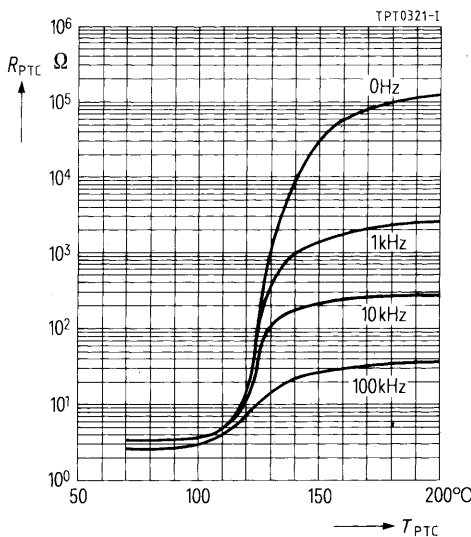


Figure 8

Influence of frequency on the  $R/T$  characteristic

## 5.3 Influence of heat dissipation on PTC temperature

Figure 9a shows the electrical power  $P_{el}$  converted in a PTC thermistor as a function of its temperature. At a given operating voltage an operating point is established in the PTC depending on the ambient temperature and thermal conduction from the thermistor to the environment.

The PTC thermistor heats up to an operating temperature above the reference temperature, for example (operating point  $A_1$  in Figure 9a). If the ambient temperature rises or the heat transfer to the environment decreases, the heat generated in the PTC thermistor can no longer be dissipated so that the PTC will increase its temperature. Its operating point moves down the curve, e.g. to  $A_2$ , causing a considerable reduction in current.

This limiting effect is maintained as long as  $T_{max}$  is not exceeded. An increase in temperature beyond  $T_{max}$  would lead to the destruction of the PTC thermistor at a given operating voltage.

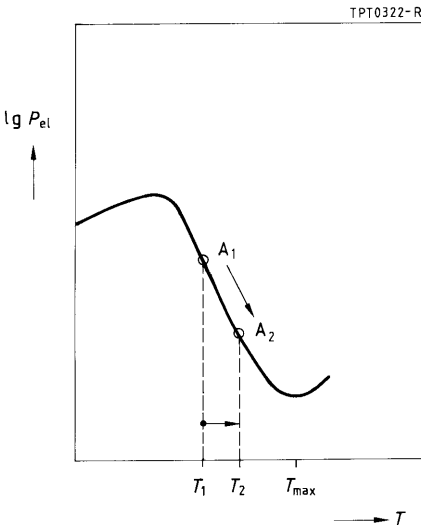


Figure 9a

Electrical power  $P_{el}$  in a PTC thermistor versus PTC temperature

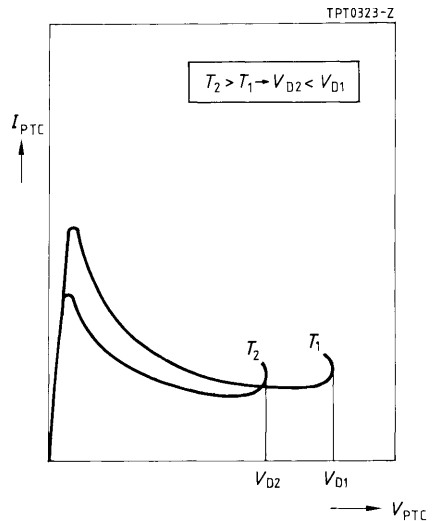


Figure 9b

Influence of the ambient temperature on the  $I/V$  characteristic

## 5.4 Influence of ambient temperature on the $I/V$ characteristic


Figure 9b shows two  $I/V$  characteristics of one and the same PTC thermistor for two different ambient temperatures  $T_1$  and  $T_2$ , with  $T_1 < T_2$ . At the higher temperature the PTC thermistor has a higher resistance value although the conditions are otherwise the same. Therefore, it carries less current. The curve for  $T_2$  is thus below that for  $T_1$ . The breakdown voltage, too, depends on the ambient temperature. If the latter is higher, the PTC thermistor reaches the critical temperature where breakdown occurs on lower power or operating voltage.  $V_{D2}$  is therefore lower than  $V_{D1}$ .

## 6 Application notes

As to their possibilities of application, PTC thermistors can be divided in the following manner:

### a) by function

#### Directly heated PTC thermistor




Heat is generated in the PTC thermistor



Power PTC thermistors

Applications where the electrical resistance is primarily determined by the current passing through the thermistor.

#### Indirectly heated PTC thermistor



Heat is supplied from outside



Temperature sensors

TPT 0324-B

Applications where the electrical resistance is primarily determined by the temperature of the medium surrounding the thermistor.

### b) by application

| Power PTC thermistors |                                         | Sensors           |                                                       |
|-----------------------|-----------------------------------------|-------------------|-------------------------------------------------------|
| Fuse                  | Short-circuit and overload protection   | Temperature       | Overtemperature protection<br>Measurement and control |
| Switch                | Motor start<br>Degaussing<br>Time delay | Limit temperature | Motor protection<br>Overtemperature protection        |
| Heater                | Small heaters<br>Thermostats            |                   |                                                       |
| Level sensor          | Limit indicators                        |                   |                                                       |

### 6.1 PTC thermistors for overload protection

Ceramic PTC thermistors are used instead of conventional fuses to protect loads such as motors, transformers, etc. or electronic circuits (line card) against overload. They not only respond to inadmissibly high currents, but also if a preset temperature limit is exceeded. Thermistor fuses limit the power dissipation of the overall circuit by increasing their resistance and thus reducing the current to a harmless residual value. In contrast to conventional fuses, they do not have to be replaced after elimination of the fault, but resume their protective function immediately after a short cooling-down time.

As opposed to PTC thermistors made of plastic materials, ceramic PTCs always return to their initial resistance value, even after frequent heating/cooling cycles.




Figure 10

PTC thermistor fuse connected in series with the load

## 6.1.1 Operating states of a PTC thermistor for overload protection

Figure 11 illustrates the two operating states of a PTC fuse. In rated operation of the load the PTC resistance remains low (operating point  $A_1$ ). Upon overloading or shorting the load, however, the power consumption in the PTC thermistor increases so much that it heats up and reduces the current flow to the load to an admissible low level (operating point  $A_2$ ). Most of the voltage then lies across the PTC thermistor. The remaining current is sufficient to keep the PTC in high-resistance mode ensuring protection until the cause of the overload has been eliminated.

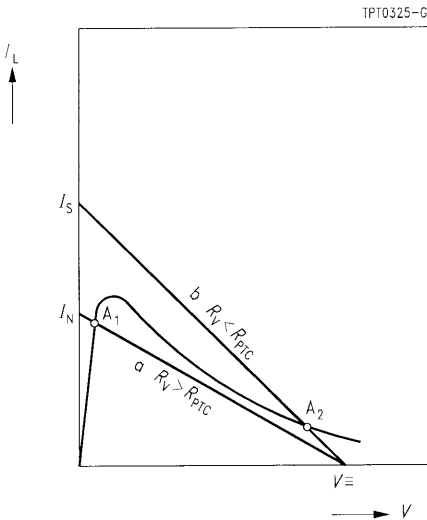


Figure 11

Operating states of a PTC thermistor for overload protection

- a Rated operation
- b Overload operation

## 6.1.2 Considerations on trip current

An essential parameter for the function and selection of a PTC thermistor fuse is the trip current. This is the current at which the applied electrical power heats up the PTC thermistor to such an

extent that the supply of current is limited and the protective function is triggered. The trip current is mainly a function of

- PTC dimensions,
- PTC temperature,
- PTC resistance,
- heat dissipation.

To be able to heat a PTC thermistor above its reference temperature, a minimum power (trip power) is necessary for given dimensions. A certain trip current is then established at a specified PTC resistance. The user has to take into account the tolerance of the trip current: lower limit = rated current, upper limit = minimum switching current.

Very often high trip currents are required. Higher trip currents with unchanged resistance are obtained through larger thermistor dimensions (see figure 12) or by raising the reference temperature. Favorable conditions for high trip currents can be achieved by making the best possible use of the cooling effect of the environment. The manufacturer contributes to good heat dissipation by producing the thermistors with large surfaces and making them as thin as possible. The user can enhance the heat dissipation effect by further measures (e.g. cooling fins) so that protective ratings of more than 200 W per component can be achieved.

Another mechanism for controlling the trip current is the PTC resistance itself. To keep the spread of the trip current as small as possible, PTC thermistor fuses are only produced in narrow resistance ranges. In practice this leads to PTC types with tolerances of 25 % and tighter so that the protective function is also possible in applications with only slight differences in current between rated operation and overload.

Another quantity affecting the trip current is the ambient temperature at which the PTC thermistor is operated. Figure 13 illustrates this relationship. An increase in ambient temperature means that

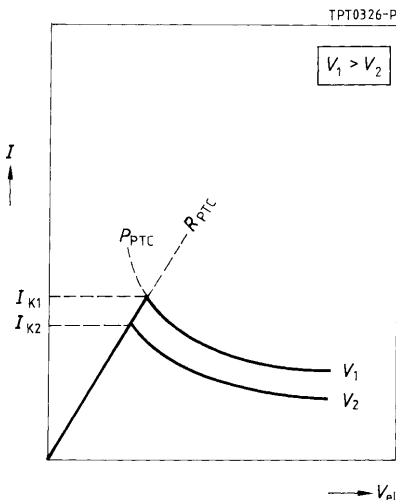


Figure 12

Influence of the PTC volume  $V$  on the trip current at given resistance  $R_{PTC}$   
( $V_{el}$ : applied voltage)

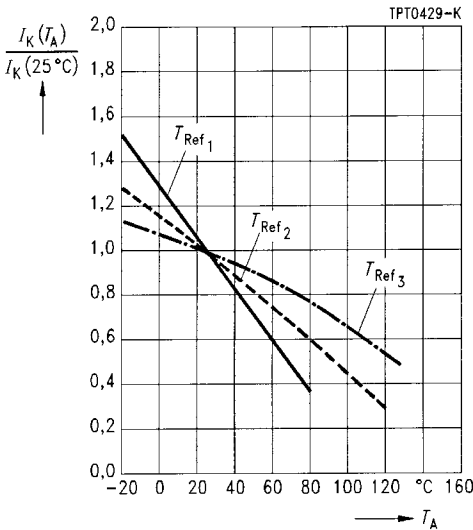


Figure 13

Standardized trip current  $I_K$  versus ambient temperature  $T_A$  (measured in still air)

Parameter:  $T_{\text{Ref}1} < T_{\text{Ref}2} < T_{\text{Ref}3}$

the PTC thermistor reaches the temperature causing it to trip with much less power consumption. A cooler environment has the opposite effect, i.e. power consumption and trip current rise.

### 6.1.3 Switching time versus switching current

The dynamic heating behavior of the PTC thermistor is determined by the specific heat capacity of the titanate material, which is approx.  $3 \text{ Ws/cm}^3$ . At short switching times – being less than 5 seconds with commonly used overcurrent protection devices – heat dissipation through the surface and lead wires is virtually negligible: almost the entire electrical dissipation is consumed to heat up the ceramic material, to increase the temperature above the reference temperature and thus to produce a stable operating point on the  $R/T$  characteristic. When dissipation increases with rising difference between device temperature and ambient, only a small amount of excess energy remains for heating the component and the result are the switching time curves as a function of switching current shown in figure 14.

S + M Components offers a wide selection of PTC thermistors for overload protection from small voltages of 20 V and rated currents of 2,9 A through line voltage to high voltages of 1000 V and 8 mA rated current. Many years of volume production and positive experience gained with the long-term features of overload protection components in practice have verified the particularly high safety and reliability of these ceramic PTC thermistors.



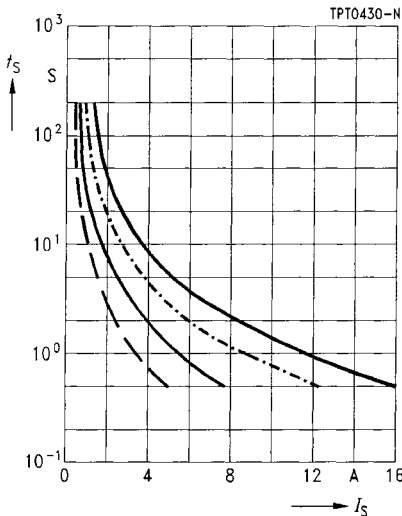


Figure 14

Switching times  $t_s$  of some PTC thermistors  
(parameter: different geometries)  
versus switching current  $I_s$   
(measured at 25 °C in still air)

## 6.1.4 Selection criteria

In designing a circuit, the following considerations should be borne in mind when selecting a PTC thermistor.

### Maximum voltage

During normal operation only a small part of the overall voltage is applied to an overload protection PTC thermistor in series with a load. When it responds, i.e. when it goes high-resistance, it has to handle virtually the entire supply voltage. For this reason the thermistor's maximum operating voltage  $V_{\max}$  should be chosen sufficiently high. Possible supply voltage fluctuations should also be allowed for.

### Rated current and switching current

The next thing is to find a PTC thermistor with sufficiently high rated current (that current at which the thermistor will under no circumstances turn off) within the suitable voltage class. To ensure reliable switch-off (= short switching times) the switching current should exceed twice the rated current. So you should consider whether the overall layout of the circuit can handle the increased power for the short time until the PTC thermistor reduces it. Here a worst-case estimate is necessary. Rated and switching currents depend on the ambient temperature. So, as the worst case for the rated current the maximum permissible ambient temperature for the application should be taken, and for the switching current the lowest possible ambient temperature.

# General Technical Information

## Maximum permissible switching current at $V_{\max}$

When considering possible situations in which the PTC thermistor is to give protection, it is necessary to examine whether there will be conditions in which the maximum permissible switching current will be exceeded. This will generally be the case when it is possible for the load to be short-circuited. In the data sheets a maximum permissible switching current  $I_{\text{Smax}}$  is stated for the maximum operating voltage  $V_{\max}$ . Overloading the PTC thermistor by too high a switching current must be avoided. If there is indeed such a risk, e.g. through frequent shorting, it can be countered by connecting a resistor in series with the PTC thermistor.

## Selection of reference temperature

S + M Components offers PTC thermistors for overload protection with reference temperatures of 80, 120, 135 und 160 °C. The rated current depends in turn on this reference temperature and the disk diameter of the thermistor. In trying to find an attractively costed solution, one could decide on a component with high reference temperature and a small disk diameter. In this case it is necessary to check whether the high surface temperature of the thermistor in the circuit could lead to undesired side-effects. The circuit board material, the configuration of the surrounding components and the spacing from any enclosure as well as any sealing compounds must all receive due attention.

## Environmental effects

If any washing solutions other than those suggested in this data book are used (e.g. isopropyl alcohol), if there is any contact with chemicals or use of potting or sealing compounds, all due care should be taken. The reduction of the titanate ceramic that can be caused by chemical effects on the surface of the thermistor and the resulting formation of low-resistance conducting paths or the altered thermal relations in the sealant can lead to local overheating of the PTC thermistor and thus to failures.

## 6.1.5 Circuit configuration

PTC thermistors can be used for versatile protection applications. The circuit diagram below (figure 15) shows the most simple circuit configuration for protecting a transformer. The type series C18\*1 is particularly suitable for this purpose. For telephone line card protection we recommend the types S102\*.

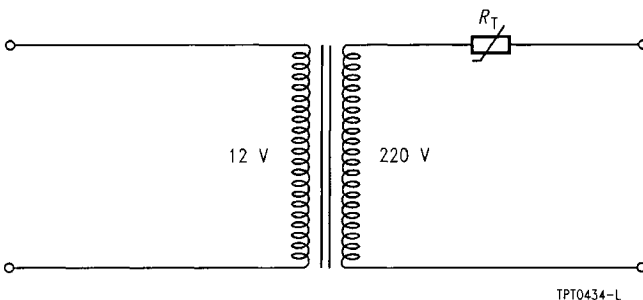


Figure 15

Most simple circuit for protecting a transformer (primary side)

PTC thermistors are also employed for input protection of measuring instrumentation up to 1000 V, for household appliances (in particular small equipment), for vehicle motor and air fan protection and for cathode preheating in energy-saving lamps.

## 6.2 PTC thermistors for time delay

These PTC thermistors are used when a load in series with the thermistor has to be switched off after a time delay and when switching occurs frequently. Examples of time delay applications are control of the auxiliary starting phase in ac motors and relay delays.

Figures 16a/b show a typical configuration of a PTC thermistor in series with a load and the delayed drop of the load current. The switching function of the PTC thermistor consists in limiting the current flowing through the load at high operating voltages after the thermistor has heated up. Differences in current of a factor of 1000 are the rule here. The switching time  $t_S$  can be approximated as follows:

$$t_S = \frac{k \cdot V \cdot (T_{Ref} - T_A)}{P}$$

|           |                                         |
|-----------|-----------------------------------------|
| $T_{Ref}$ | Reference temperature of PTC thermistor |
| $T_A$     | Ambient temperature                     |
| $k$       | Material-specific constant              |
| $V$       | PTC thermistor volume                   |
| $P$       | Switch-on power of PTC thermistor       |

This shows that the switching time can be influenced by the size of the PTC thermistor, its reference temperature and the power supplied. Manufacturing techniques allow a variation of the switching time in a wide range. Switching times are lengthened by increasing the volume or the reference temperature; high power consumption by the PTC thermistor, on the other hand, results in short switching times. The graph in figure 16c shows the switch-off behavior for different levels of current consumption.

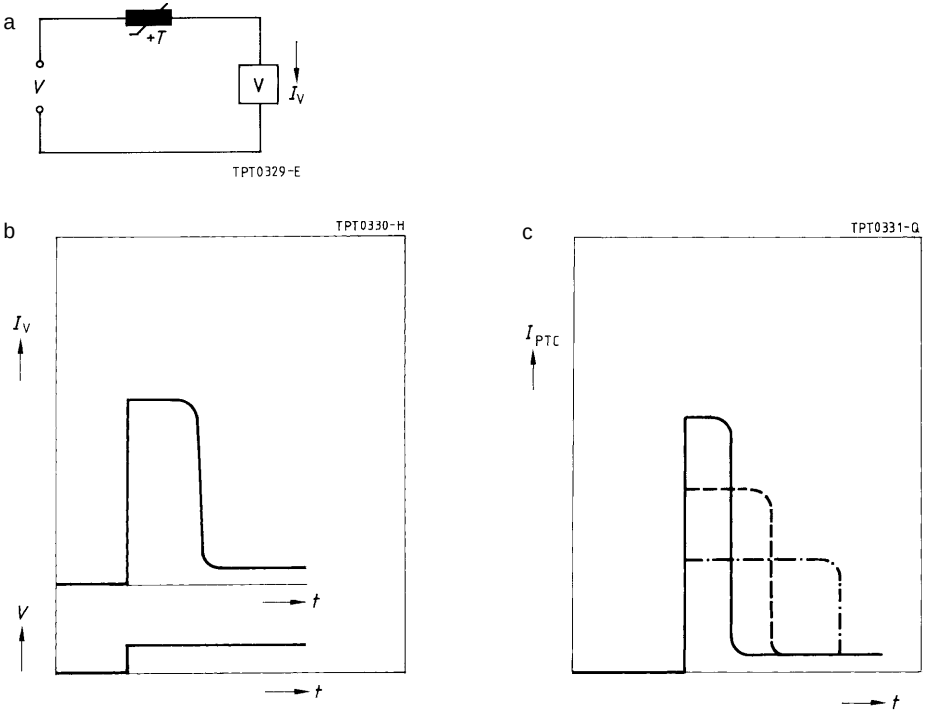


Figure 16

Typical configuration of a PTC thermistor for time delay (a)

Typical delay of the load current  $I_V$  (b)

Typical switch-off behavior of a PTC thermistor (c)

With the type series C1118/C1119 S + M Components offers a special thermistor version for energy-saving lamps. Due to a soldering technique especially employed for this version, these thermistors are able to handle a very large number of switching cycles ( $> 10\,000$ ).

The encased J29 model is particularly suitable for use in switch-mode power supplies.

## 6.3 PTC thermistors for motor starting




Figure 17

Simple starter circuit for single-phase ac motors  
The PTC thermistor is used for delaying the switch-off of the starter auxiliary winding (after the motor has accelerated) to protect the winding from damage

A wide range of types including some encased models is available for motor start applications. Our motor start thermistors have been designed for a large number of switching cycles (> 100 000) at high starting powers.

## 6.4 PTC thermistors for picture tube degaussing

PTC thermistors degauss the shadow mask of color picture tubes by reducing the alternating current flowing through the degaussing coil within a short period of time. A large difference between inrush current and residual current is crucial for good degaussing. S+M Components provides single and double PTCs for degaussing purposes. In a double PTC, a PTC connected to the power supply supports heating of another PTC that is connected to the coil. As compared to a single PTC, this configuration permits the residual current to be further reduced.

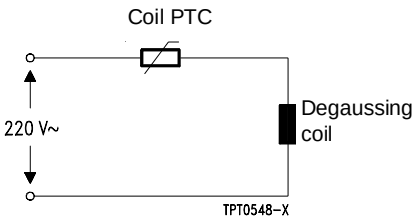


Figure 18

Degaussing with a single PTC

A PTC thermistor connected in series with the coil degausses the shadow mask of a picture tube. The high inrush current is reduced to a low residual value.

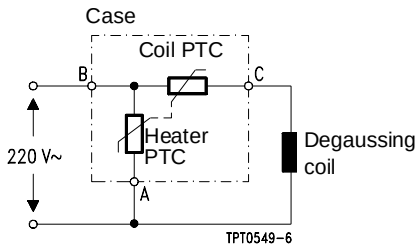


Figure 19

Degaussing with two thermally coupled PTC thermistors

Degaussing with a double PTC permits a further reduction of the residual current. This is achieved by additionally heating the coil PTC by means of a second PTC.

**6.5 PTC thermistors as level sensors**

A thermistor heated with a low voltage of approx. 12 V responds to a change in external cooling conditions by changing its power consumption. At constant voltage the power consumption is hence a measure for the dissipation conditions. With increasing dissipation the thermistor cools down and the PTC current rises due to the positive temperature coefficient. A marked increase in current occurs when a PTC thermistor heated in air is immersed into a liquid, where a larger amount of heat is dissipated than in air. This feature makes the PTC thermistor an ideal candidate for overflow control in tanks for liquids. The S + M product line includes a number of types especially matched to this kind of application ([see page 126 ff](#)).




Figure 20

Circuit configuration for liquid level control

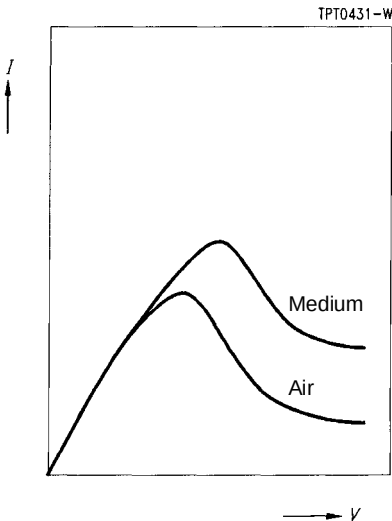


Figure 21

Current versus voltage in different media

$$\delta_{\text{Medium}} > \delta_{\text{Air}}$$

Further applications are

- Overflow protection for oil tanks (prescribed by the German Technical Inspectorate TÜV)
- Liquid level measurement
- Limit indication (e.g. indicator for too low a water level in the reservoir for the windshield wipers)
- Leakage sensing

## 6.6 PTC thermistors for measurement and control, temperature sensors

With PTC thermistors as temperature sensors only the steep region of the  $R/T$  characteristic is used. The resistance of the PTC is to be regarded as a function of the ambient temperature  $[R_{\text{PTC}} = f(T_A)]$ .

The precondition for this relationship between resistance and ambient temperature is that self-heating and/or the varistor effect are excluded. This means that these PTC thermistors must be operated in the lowest possible field strengths. To enable a fast response, thermistor sensors have especially small dimensions. High control accuracy is achieved by using materials with an extra steep resistance/temperature characteristic.

Today it is possible to produce devices with temperature coefficients in an operating range of more than 30 %/K!

PTC thermistors are widely employed as temperature sensors in electrical machines to monitor winding temperature. A wide variety of sensors with trip temperatures between  $-30$  and  $+180$  °C is available for different temperature ranges.

### 6.7 PTC thermistors as heating elements

The use of PTC thermistors is not confined to switching and current sensing applications, but they are also ideal as heating elements because of their specific  $R/T$  characteristic. Due to the positive curve of the temperature coefficient, it is possible to dispense with the additional control and over-temperature protection devices required for conventional heating systems.

In this application, the PTC thermistors are operated directly at the available voltage without a series resistance, preferably in the low-resistance section of the  $R/T$  characteristic (see figure 2) since particularly high heating power is achieved in this section of the curve. In order to make use of this advantage, it is important to create conditions which will not cause the PTC thermistor to raise its resistance. This is ensured with extremely thin PTC thermistors by increased heat transmission from the surface. To this end, the PTC thermistor is placed between heat-emitting solid bodies so as to optimize heat flow from the thermistor to its environment to be heated. Here, symmetrical thermal decoupling is of great advantage.

Special care has to be taken when PTC thermistors are used in potted circuits. The high thermal resistance of potting materials can very much impair heat transmission so that the PTC thermistors could heat up to a critical temperature level. The PTC thermistor as a heating element is described in detail in the Siemens Components reprint "The PTC Thermistor as Heating Element", ordering no. B4-B2491-X-X-7600.

In PTC thermistors operated at line voltage steep temperature gradients and sometimes high operating temperatures are generated in the heating-up phase. In these cases soldering should be avoided since the solder joints may fatigue. The devices are offered by the manufacturer with metallized surfaces for clamp contacting, which guarantees favorable thermal decoupling.

PTC thermistors for heating applications can be manufactured for a broad temperature span (up to 340 °C) in a wide variety of dimensions, so that the suitable type for a particular application can be easily found.

Application examples for heating thermistors:

- Rib heaters: fan heaters up to 2 kW, hair-driers, tumble-driers
- Heating plates, mosquito repellent devices, egg-cookers, switchgear cabinet heating, scent evaporators etc.
- Cartridge heaters for hair curlers, facial treatment devices, travel press irons, adhesive pistols, baby food warmers
- Bimetal heaters for door latches of washing machines, overtemperature fuses
- Heating of liquids such as oil preheating in oil burners or for dilative elements
- Heating systems in automobiles: suction pipe preheating for injection motors, mirror heating, washing nozzle heating, defrosters



# Overload Protection Disks

**B599\*5**  
**C 915 ... C 995**

**20 V, 160 °C**

## Applications


- Overcurrent and short-circuit protection

## Features

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in yellow
- Low resistance
- For rated currents of up to 2,9 A
- High thermal stability
- UL approval (E69802)

## Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



Dimensions (mm)


| Type  | $b_{\max}$ | $\varnothing d$ | $h_{\max}$ |
|-------|------------|-----------------|------------|
| C 915 | 26,0       | 0,8             | 29,5       |
| C 935 | 22,0       | 0,6             | 25,5       |
| C 945 | 17,5       | 0,6             | 21,0       |
| C 955 | 13,5       | 0,6             | 17,0       |
| C 965 | 11,0       | 0,6             | 14,5       |
| C 975 | 9,0        | 0,6             | 12,5       |
| C 985 | 6,5        | 0,6             | 10,0       |
| C 995 | 4,0        | 0,5             | 7,5        |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 20         | V  |
| Rated voltage                                   | $V_N$            | 12         | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 10$  | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 160        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-40/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code   |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|-----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                 |
| C 915 | 2900  | 5700  | 15,0                              | 350                         | 0,2      | 0,1        | B59915-C160-A70 |
| C 935 | 2100  | 4150  | 10,0                              | 240                         | 0,3      | 0,2        | B59935-C160-A70 |
| C 945 | 1500  | 3050  | 8,0                               | 170                         | 0,45     | 0,3        | B59945-C160-A70 |
| C 955 | 950   | 1900  | 5,5                               | 120                         | 0,8      | 0,5        | B59955-C160-A70 |
| C 965 | 700   | 1450  | 4,3                               | 105                         | 1,2      | 0,7        | B59965-C160-A70 |
| C 975 | 550   | 1100  | 3,0                               | 85                          | 1,8      | 1,1        | B59975-C160-A70 |
| C 985 | 300   | 600   | 1,0                               | 65                          | 4,6      | 2,7        | B59985-C160-A70 |
| C 995 | 150   | 300   | 0,7                               | 40                          | 13       | 7,8        | B59995-C160-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

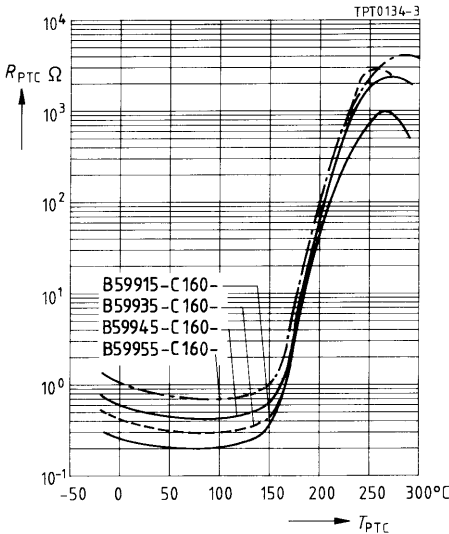


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

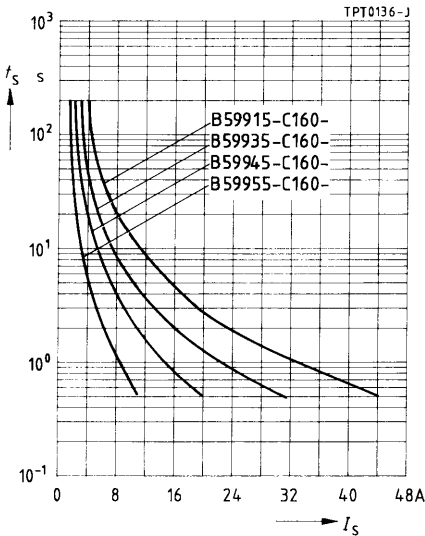

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

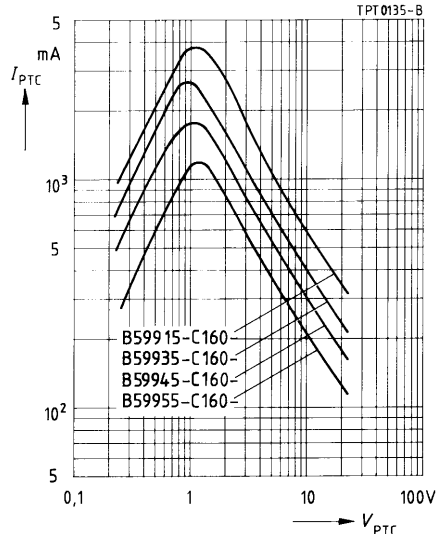


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

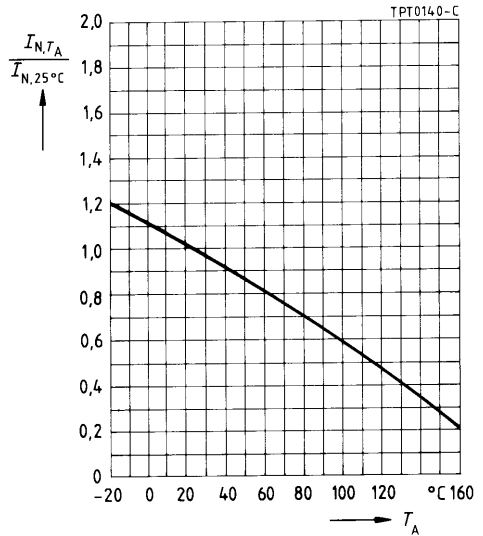


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

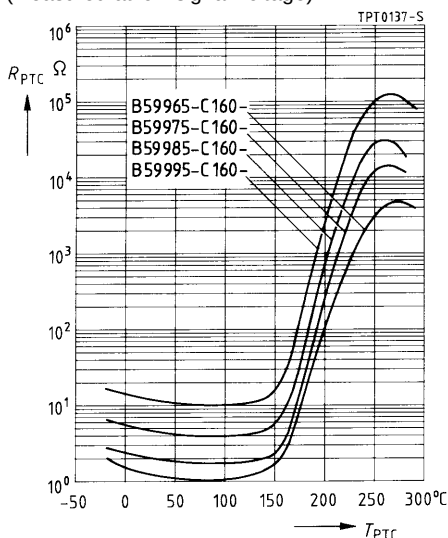


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

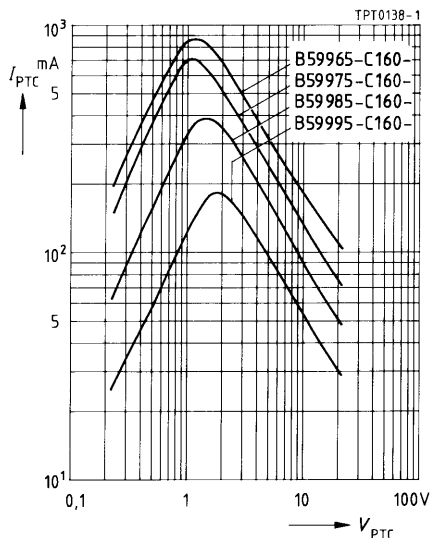

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

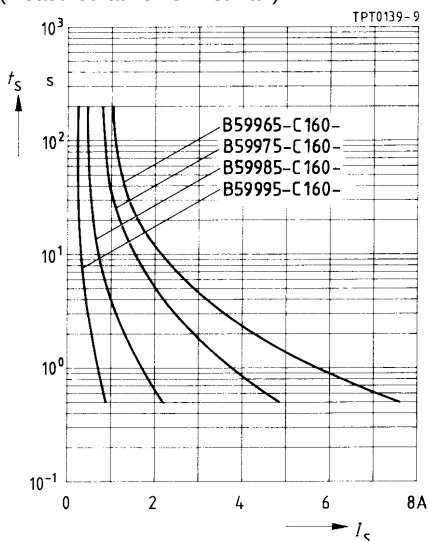

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

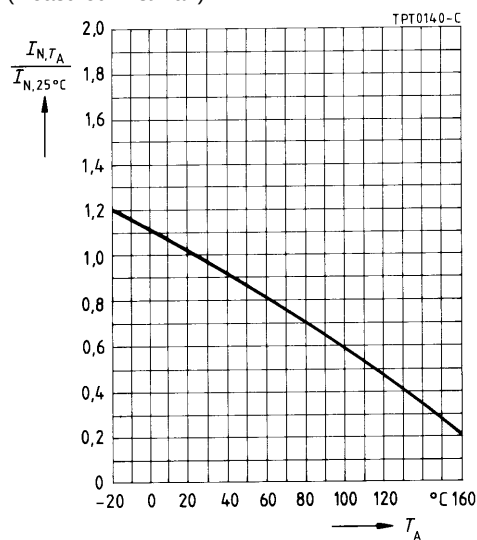


30 V, 120 °C

Applications

- Overcurrent and short-circuit protection

Features

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in white
- Low resistance
- For rated currents of up to 2,5 A
- UL approval (E69802)



Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape

Dimensions (mm)


| Type  | $b_{\max}$ | $\varnothing d$ | $h_{\max}$ |
|-------|------------|-----------------|------------|
| C 915 | 26,0       | 0,8             | 29,5       |
| C 935 | 22,0       | 0,6             | 25,5       |
| C 945 | 17,5       | 0,6             | 21,0       |
| C 955 | 13,5       | 0,6             | 17,0       |
| C 965 | 11,0       | 0,6             | 14,5       |
| C 975 | 9,0        | 0,6             | 12,5       |
| C 985 | 6,5        | 0,6             | 10,0       |
| C 995 | 4,0        | 0,5             | 7,5        |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 30         | V  |
| Rated voltage                                   | $V_N$            | 24         | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 10$  | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 120        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-40/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code   |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|-----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                 |
| C 915 | 2500  | 5000  | 15,0                              | 220                         | 0,2      | 0,1        | B59915-C120-A70 |
| C 935 | 1800  | 3600  | 10,0                              | 170                         | 0,3      | 0,2        | B59935-C120-A70 |
| C 945 | 1300  | 2600  | 8,0                               | 115                         | 0,45     | 0,3        | B59945-C120-A70 |
| C 955 | 850   | 1700  | 5,5                               | 80                          | 0,8      | 0,5        | B59955-C120-A70 |
| C 965 | 600   | 1200  | 4,3                               | 70                          | 1,2      | 0,7        | B59965-C120-A70 |
| C 975 | 450   | 900   | 3,0                               | 60                          | 1,8      | 1,1        | B59975-C120-A70 |
| C 985 | 250   | 500   | 1,0                               | 45                          | 4,6      | 2,7        | B59985-C120-A70 |
| C 995 | 120   | 240   | 0,7                               | 25                          | 13       | 7,8        | B59995-C120-A70 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

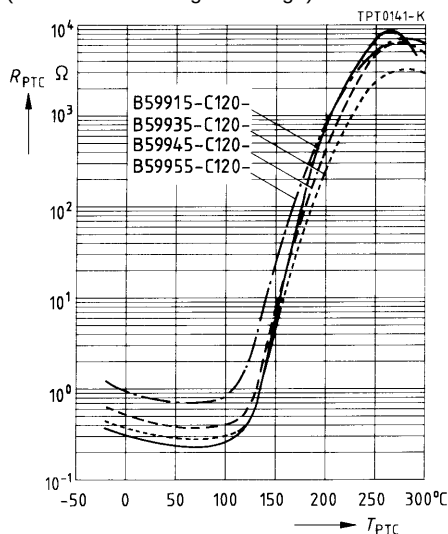


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

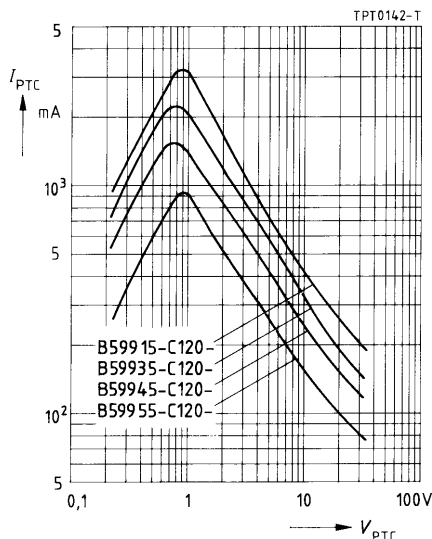

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

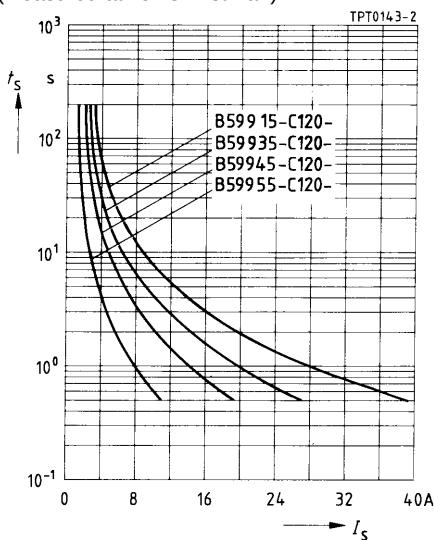


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

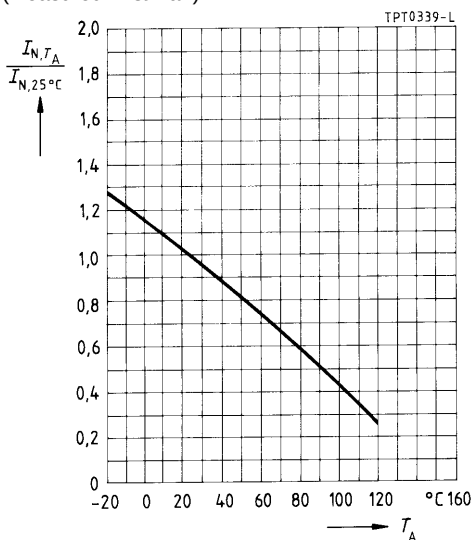


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

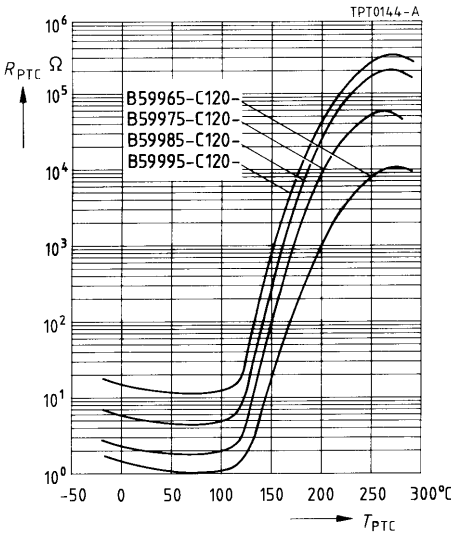


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

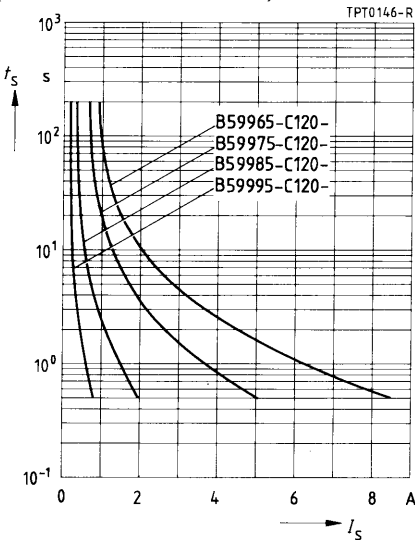

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

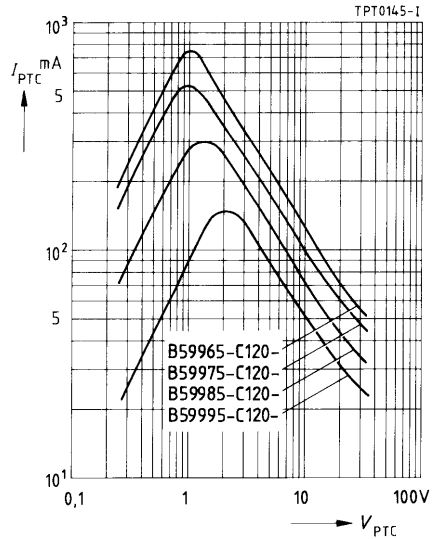

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

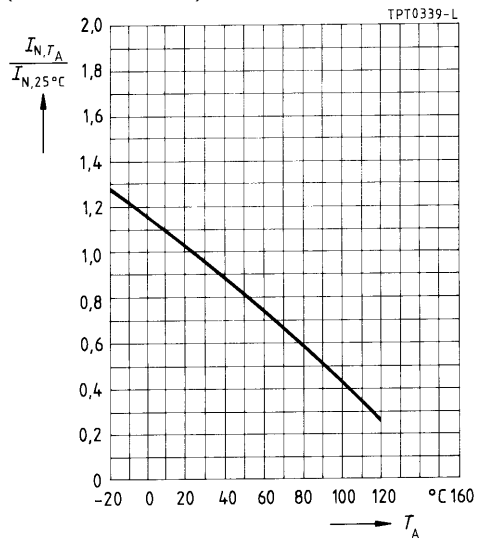

**54 V, 160 °C**

**Applications**


- Overcurrent and short-circuit protection

**Features**

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in yellow
- UL approval (E69802)

**Options**

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



Dimensions (mm)


| Type  | $b_{\max}$ | $\phi d$ | $h_{\max}$ |
|-------|------------|----------|------------|
| C 910 | 26,0       | 0,8      | 29,5       |
| C 930 | 22,0       | 0,6      | 25,5       |
| C 940 | 17,5       | 0,6      | 21,0       |
| C 950 | 13,5       | 0,6      | 17,0       |
| C 960 | 11,0       | 0,6      | 14,5       |
| C 970 | 9,0        | 0,6      | 12,5       |
| C 980 | 6,5        | 0,6      | 10,0       |
| C 990 | 4,0        | 0,5      | 7,5        |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 54         | V  |
| Rated voltage                                   | $V_N$            | 42         | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 6$   | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 160        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-40/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code   |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|-----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                 |
| C 910 | 1150  | 2370  | 15,0                              | 110                         | 0,9      | 0,6        | B59910-C160-A70 |
| C 930 | 770   | 1570  | 10,0                              | 70                          | 1,65     | 1,1        | B59930-C160-A70 |
| C 940 | 550   | 1140  | 8,0                               | 50                          | 2,3      | 1,5        | B59940-C160-A70 |
| C 950 | 360   | 730   | 5,5                               | 35                          | 3,7      | 2,4        | B59950-C160-A70 |
| C 960 | 280   | 560   | 4,3                               | 30                          | 5,6      | 3,7        | B59960-C160-A70 |
| C 970 | 170   | 355   | 3,0                               | 25                          | 9,4      | 6,2        | B59970-C160-A70 |
| C 980 | 95    | 200   | 1,0                               | 20                          | 25       | 16,5       | B59980-C160-A70 |
| C 990 | 55    | 120   | 0,7                               | 15                          | 55       | 36,3       | B59990-C160-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

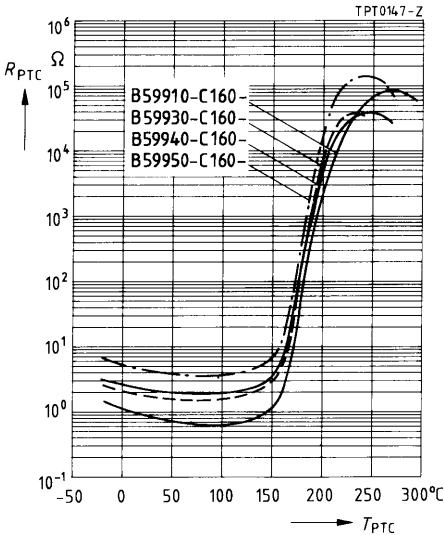


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

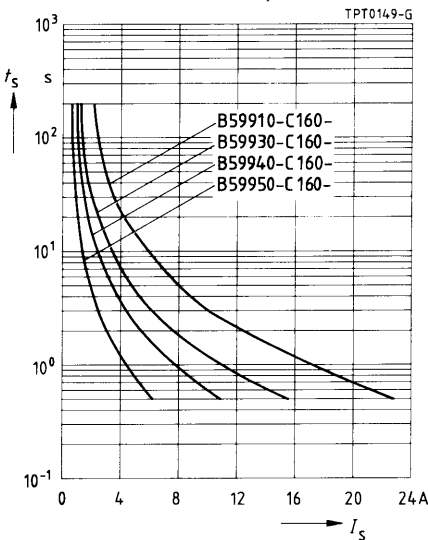

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

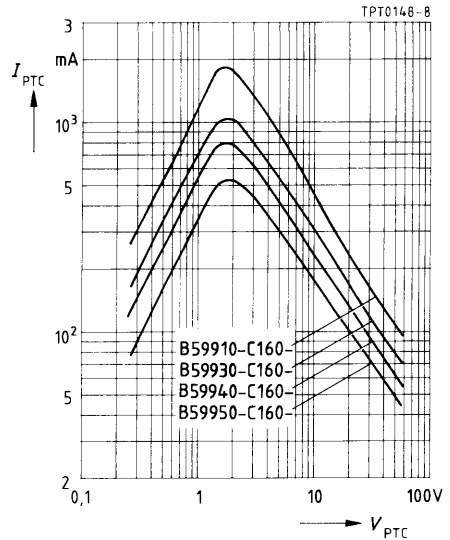


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

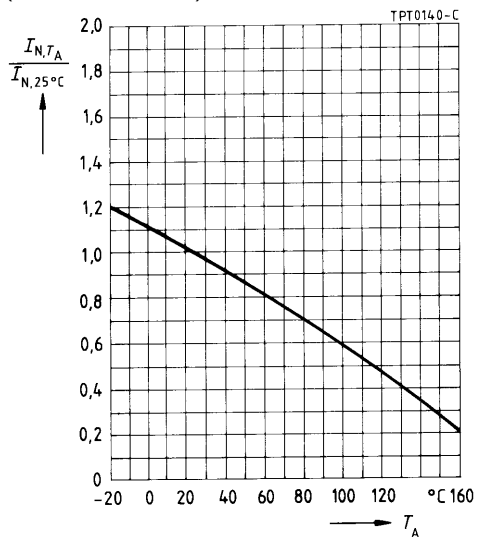




### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

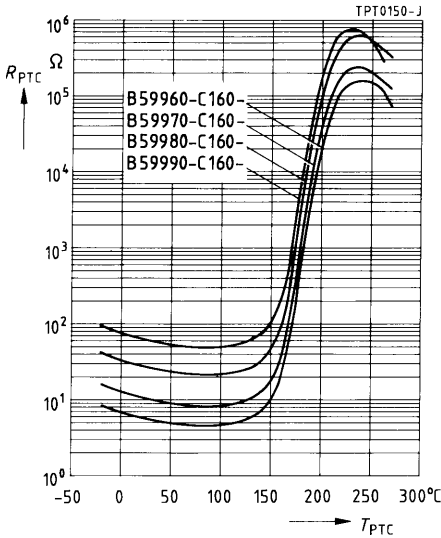


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

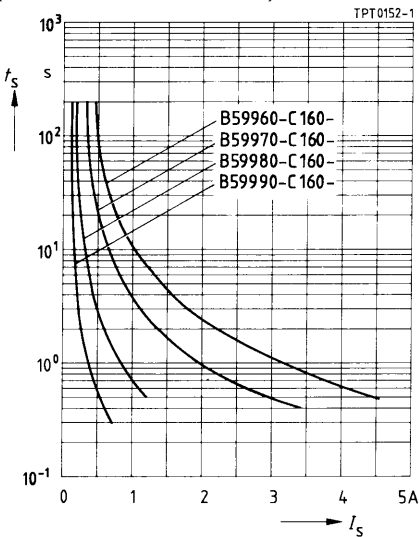

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

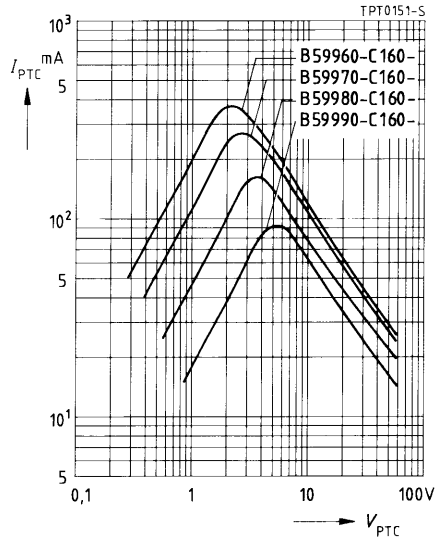

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

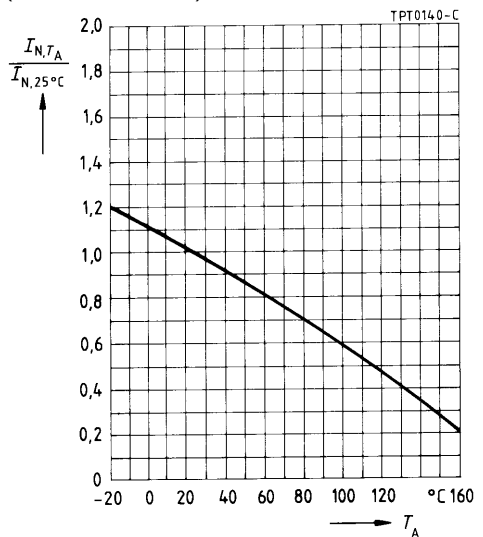

80 V, 80 °C

**Applications**


- Overcurrent and short-circuit protection

**Features**

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in black or red
- Short response times
- Reduced device temperature at  $V_{\max}$

**Options**

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



Dimensions (mm)


| Type  | $b_{\max}$ | $\phi d$ | $h_{\max}$ |
|-------|------------|----------|------------|
| C 910 | 26,0       | 0,8      | 29,5       |
| C 930 | 22,0       | 0,6      | 25,5       |
| C 940 | 17,5       | 0,6      | 21,0       |
| C 950 | 13,5       | 0,6      | 17,0       |
| C 960 | 11,0       | 0,6      | 14,5       |
| C 970 | 9,0        | 0,6      | 12,5       |
| C 980 | 6,5        | 0,6      | 10,0       |
| C 990 | 4,0        | 0,5      | 7,5        |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 80         | V  |
| Rated voltage                                   | $V_N$            | 63         | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 2$   | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 80         | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-40/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code  |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                |
| C 910 | 530   | 1100  | 15,0                              | 50                          | 0,9      | 0,6        | B59910-C80-A70 |
| C 930 | 340   | 700   | 10,0                              | 35                          | 1,65     | 1,1        | B59930-C80-A70 |
| C 940 | 245   | 500   | 8,0                               | 25                          | 2,3      | 1,5        | B59940-C80-A70 |
| C 950 | 170   | 350   | 5,5                               | 20                          | 3,7      | 2,4        | B59950-C80-A70 |
| C 960 | 130   | 265   | 4,3                               | 15                          | 5,6      | 3,7        | B59960-C80-A70 |
| C 970 | 90    | 190   | 3,0                               | 11                          | 9,4      | 6,2        | B59970-C80-A70 |
| C 980 | 50    | 110   | 1,0                               | 8                           | 25       | 16,5       | B59980-C80-A70 |
| C 990 | 30    | 60    | 0,7                               | 5                           | 55       | 36,3       | B59990-C80-A70 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

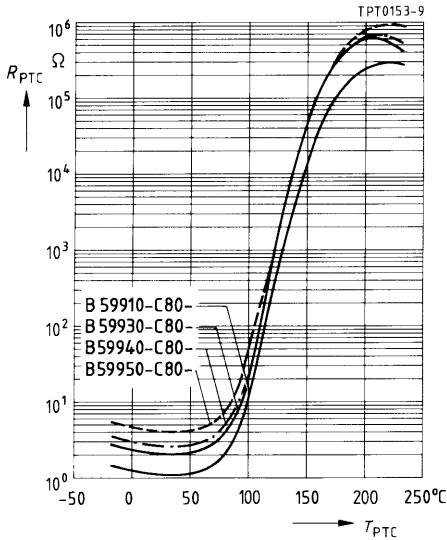


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

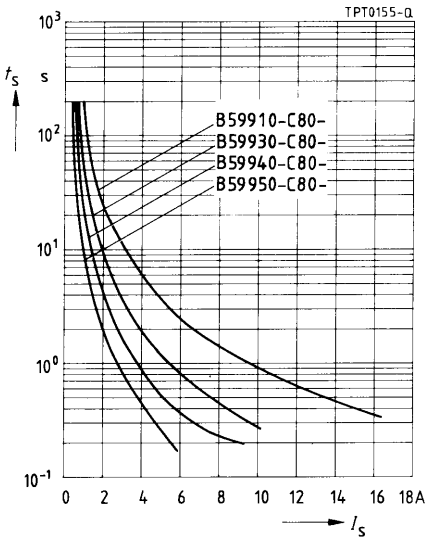

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

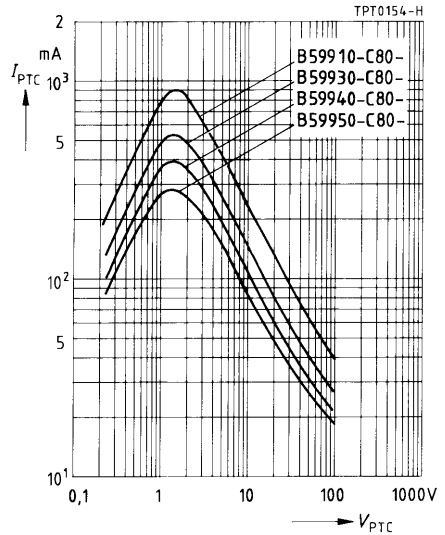


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

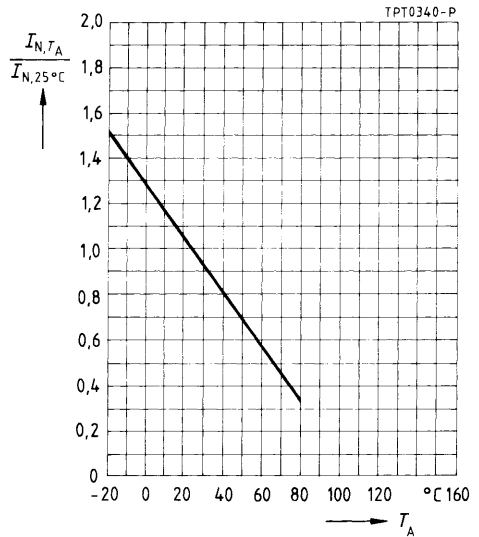


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

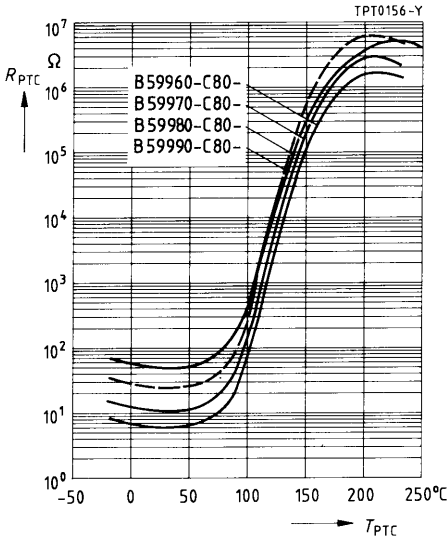


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

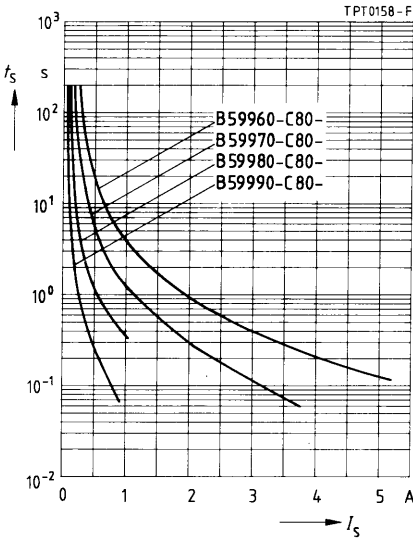

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

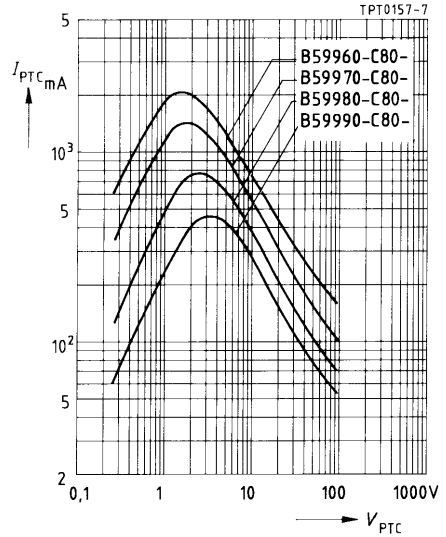

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

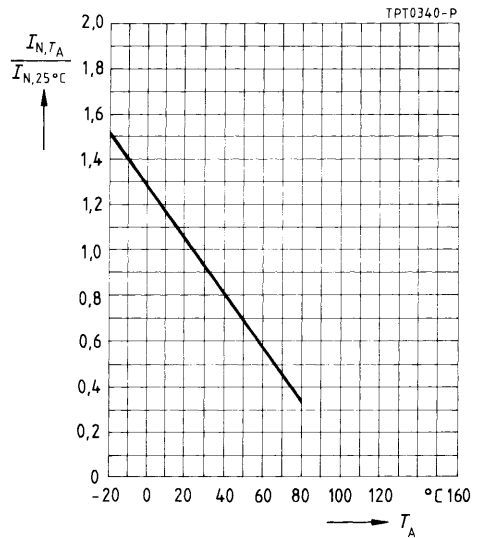

**80 V, 120 °C**

**Applications**


- Overcurrent and short-circuit protection

**Features**

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in white
- UL approval (E69802)

**Options**

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



Dimensions (mm)


| Type  | $b_{\text{max}}$ | $\phi d$ | $h_{\text{max}}$ |
|-------|------------------|----------|------------------|
| C 910 | 26,0             | 0,8      | 29,5             |
| C 930 | 22,0             | 0,6      | 25,5             |
| C 940 | 17,5             | 0,6      | 21,0             |
| C 950 | 13,5             | 0,6      | 17,0             |
| C 960 | 11,0             | 0,6      | 14,5             |
| C 970 | 9,0              | 0,6      | 12,5             |
| C 980 | 6,5              | 0,6      | 10,0             |
| C 990 | 4,0              | 0,5      | 7,5              |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\text{max}}$ | 80         | V  |
| Rated voltage                                   | $V_N$            | 63         | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 4$   | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 120        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-40/+125$ | °C |
| ( $V = V_{\text{max}}$ )                        | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\text{max}}$<br>( $V = V_{\text{max}}$ ) | $I_f$<br>( $V = V_{\text{max}}$ ) | $R_N$    | $R_{\text{min}}$ | Ordering code   |
|-------|-------|-------|-----------------------------------------------|-----------------------------------|----------|------------------|-----------------|
|       | mA    | mA    | A                                             | mA                                | $\Omega$ | $\Omega$         |                 |
| C 910 | 1000  | 2000  | 15,0                                          | 65                                | 0,9      | 0,6              | B59910-C120-A70 |
| C 930 | 700   | 1400  | 10,0                                          | 50                                | 1,65     | 1,1              | B59930-C120-A70 |
| C 940 | 450   | 900   | 8,0                                           | 40                                | 2,3      | 1,5              | B59940-C120-A70 |
| C 950 | 320   | 640   | 5,5                                           | 30                                | 3,7      | 2,4              | B59950-C120-A70 |
| C 960 | 250   | 500   | 4,3                                           | 25                                | 5,6      | 3,7              | B59960-C120-A70 |
| C 970 | 150   | 300   | 3,0                                           | 20                                | 9,4      | 6,2              | B59970-C120-A70 |
| C 980 | 85    | 170   | 1,0                                           | 16                                | 25       | 16,5             | B59980-C120-A70 |
| C 990 | 50    | 100   | 0,7                                           | 12                                | 55       | 36,3             | B59990-C120-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

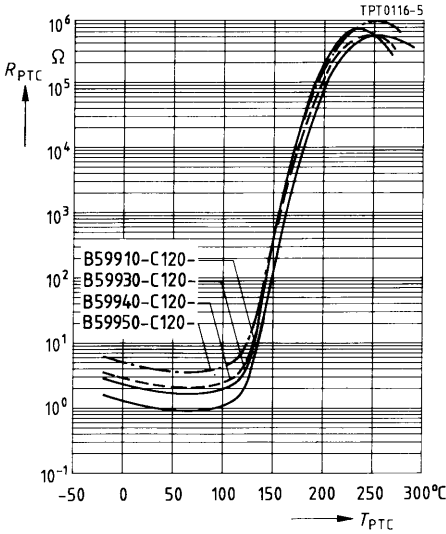


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

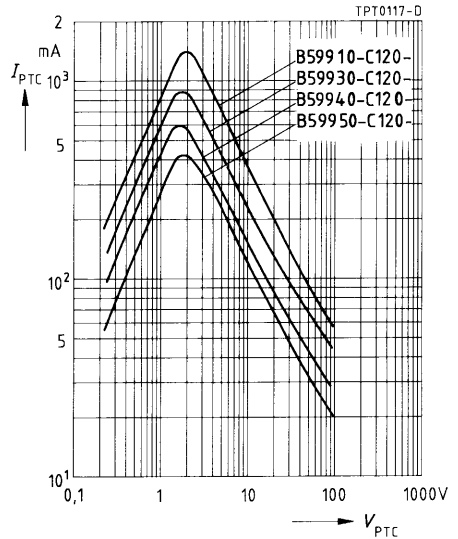

Switching time  $t_s$  versus switching current  $I_s$   
 (measured at 25 °C in still air)

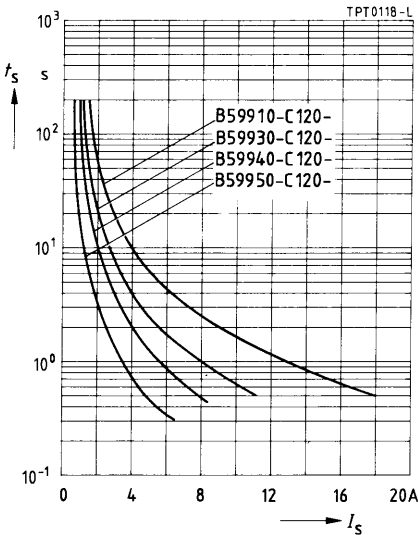


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

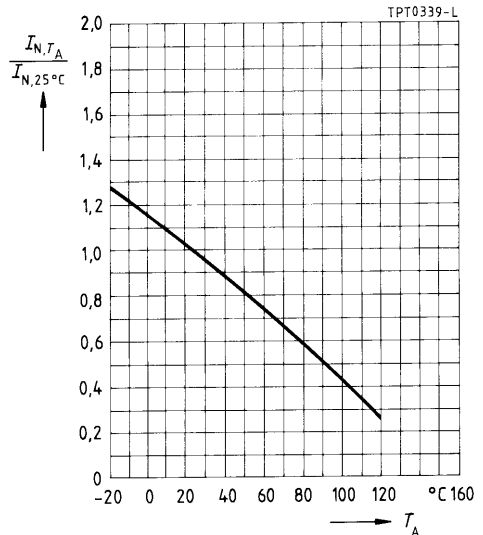


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

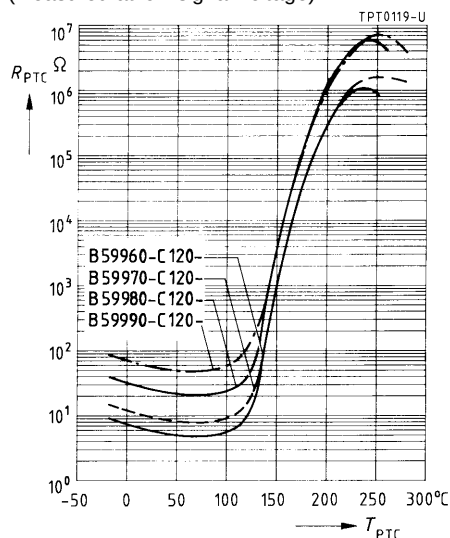


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

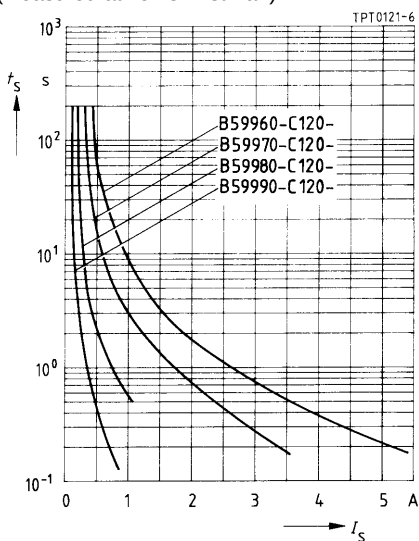

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

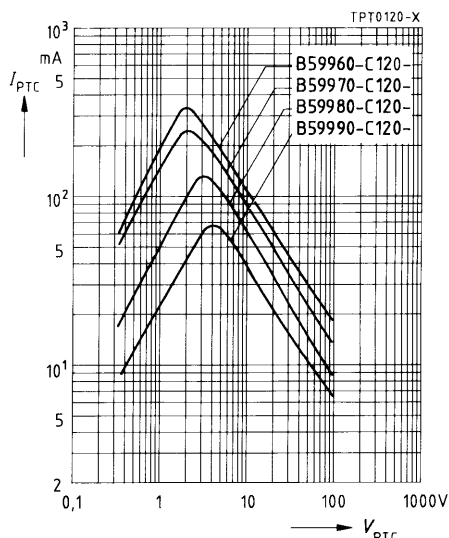

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

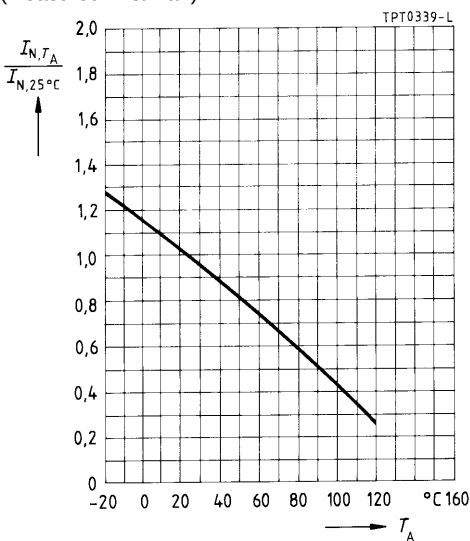

160 V, 160 °C

Applications


- Overcurrent and short-circuit protection

Features

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in yellow
- UL approval (E69802)

Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



TPT0355 - 3

Dimensions (mm)

| Type  | $b_{\max}$ | $\phi d$ | $h_{\max}$ |
|-------|------------|----------|------------|
| C 810 | 26,0       | 0,8      | 29,5       |
| C 830 | 22,0       | 0,6      | 25,5       |
| C 840 | 17,5       | 0,6      | 21,0       |
| C 850 | 13,5       | 0,6      | 17,0       |
| C 860 | 11,0       | 0,6      | 14,5       |
| C 870 | 9,0        | 0,6      | 12,5       |
| C 880 | 6,5        | 0,6      | 10,0       |
| C 890 | 4,0        | 0,5      | 7,5        |


|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 160        | V  |
| Rated voltage                                   | $V_N$            | 110        | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Switching time                                  | $t_S$            | $\leq 10$  | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 160        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-25/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |

| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code   |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|-----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                 |
| C 810 | 800   | 1600  | 10,0                              | 30                          | 2,6      | 1,6        | B59810-C160-A70 |
| C 830 | 525   | 1050  | 7,0                               | 24                          | 3,7      | 2,2        | B59830-C160-A70 |
| C 840 | 400   | 800   | 4,1                               | 18                          | 6        | 3,6        | B59840-C160-A70 |
| C 850 | 250   | 500   | 2,2                               | 16                          | 10       | 6,0        | B59850-C160-A70 |
| C 860 | 180   | 360   | 1,5                               | 13                          | 15       | 7,8        | B59860-C160-A70 |
| C 870 | 125   | 250   | 1,0                               | 11                          | 25       | 13,1       | B59870-C160-A70 |
| C 880 | 70    | 140   | 0,4                               | 8                           | 70       | 36,7       | B59880-C160-A70 |
| C 890 | 35    | 70    | 0,2                               | 6                           | 150      | 78,7       | B59890-C160-A70 |




### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

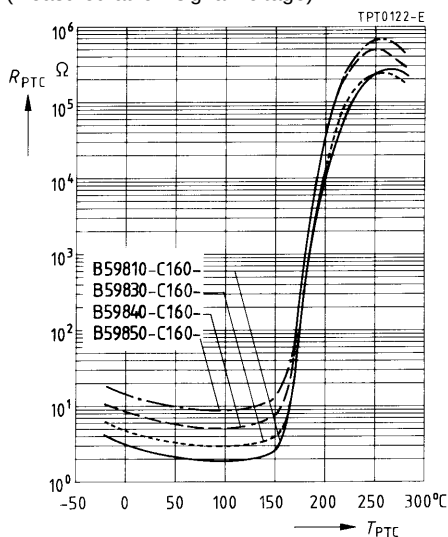


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

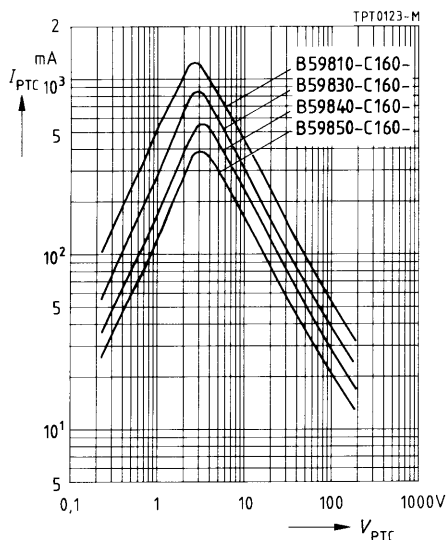

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

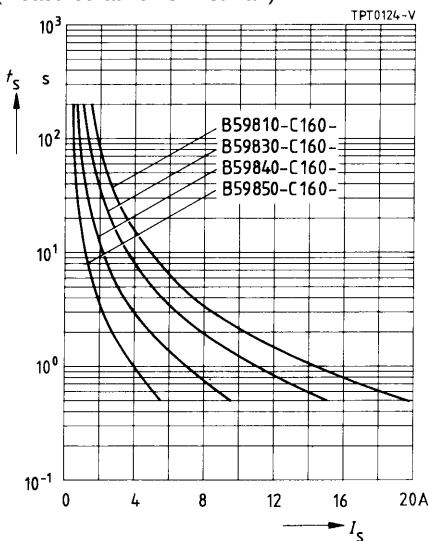


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

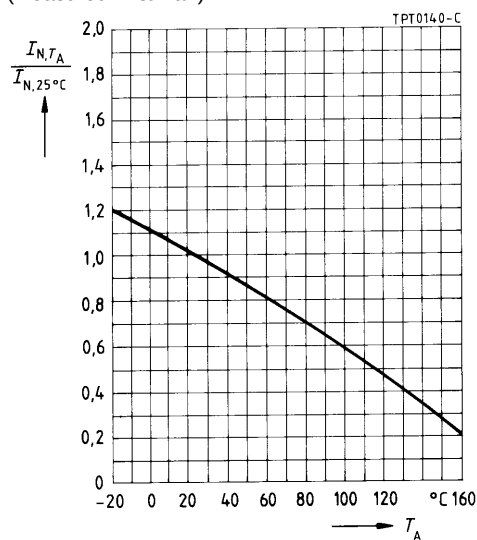


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

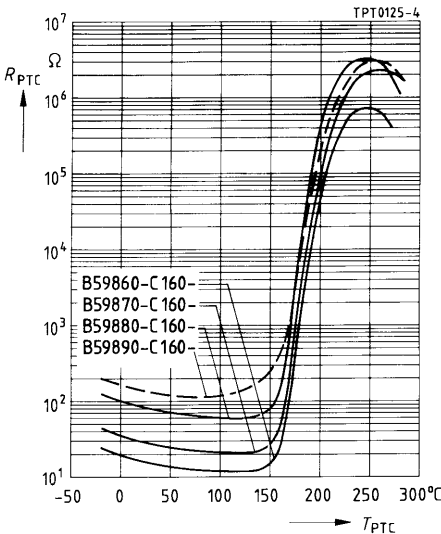


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

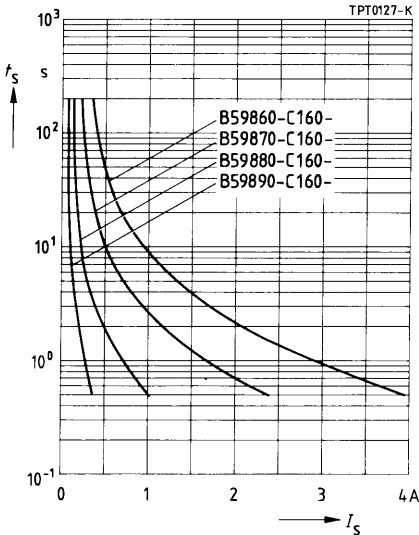

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

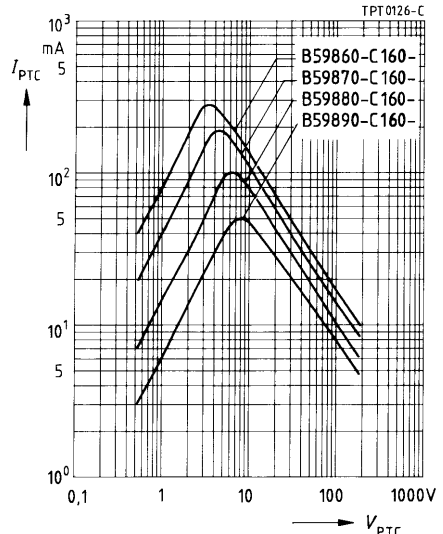

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

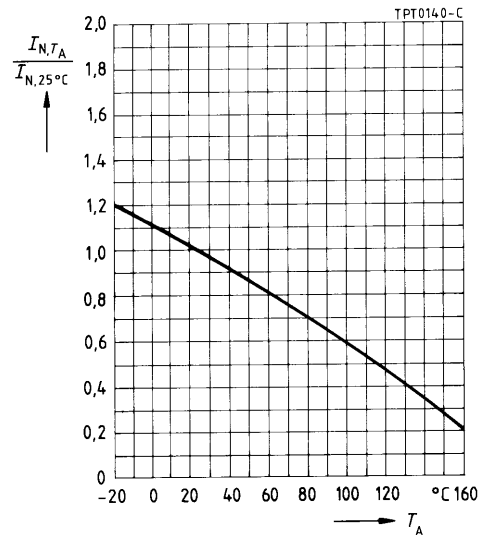

265 V, 80 °C

Applications


- Overcurrent and short-circuit protection

Features

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in black or red
- Short response times
- Reduced device temperature at  $V_{\max}$

Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



TPT0355 - 3

Dimensions (mm)


| Type  | $b_{\max}$ | $\phi d$ | $h_{\max}$ |
|-------|------------|----------|------------|
| C 810 | 26,0       | 0,8      | 29,5       |
| C 830 | 22,0       | 0,6      | 25,5       |
| C 840 | 17,5       | 0,6      | 21,0       |
| C 850 | 13,5       | 0,6      | 17,0       |
| C 860 | 11,0       | 0,6      | 14,5       |
| C 870 | 9,0        | 0,6      | 12,5       |
| C 880 | 6,5        | 0,6      | 10,0       |
| C 890 | 4,0        | 0,5      | 7,5        |

|                                         |                  |              |    |
|-----------------------------------------|------------------|--------------|----|
| Max. operating voltage ( $T_A = 60$ °C) | $V_{\max}$       | 265          | V  |
| Rated voltage                           | $V_N$            | 220          | V  |
| Switching cycles (typ.)                 | $N$              | 100          |    |
| Switching time                          | $t_S$            | $\leq 6$     | s  |
| Reference temperature                   | $T_{\text{Ref}}$ | 80           | °C |
| Resistance tolerance                    | $\Delta R_N$     | $\pm 25$ %   |    |
| Operating temperature range ( $V = 0$ ) | $T_{\text{op}}$  | $- 25/+ 125$ | °C |
| ( $V = V_{\max}$ )                      | $T_{\text{op}}$  | 0/60         | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code  |
|-------|-------|-------|-----------------------------------|-----------------------------|----------|------------|----------------|
|       | mA    | mA    | A                                 | mA                          | $\Omega$ | $\Omega$   |                |
| C 810 | 350   | 710   | 10,0                              | 20                          | 2,6      | 1,6        | B59810-C80-A70 |
| C 830 | 250   | 510   | 7,0                               | 15                          | 3,7      | 2,2        | B59830-C80-A70 |
| C 840 | 170   | 350   | 4,1                               | 10                          | 6        | 3,6        | B59840-C80-A70 |
| C 850 | 110   | 230   | 2,2                               | 8                           | 10       | 6,0        | B59850-C80-A70 |
| C 860 | 90    | 180   | 1,5                               | 6                           | 15       | 7,8        | B59860-C80-A70 |
| C 870 | 60    | 130   | 1,0                               | 5                           | 25       | 13,1       | B59870-C80-A70 |
| C 880 | 30    | 70    | 0,4                               | 4                           | 70       | 36,7       | B59880-C80-A70 |
| C 890 | 15    | 40    | 0,2                               | 3                           | 150      | 78,7       | B59890-C80-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

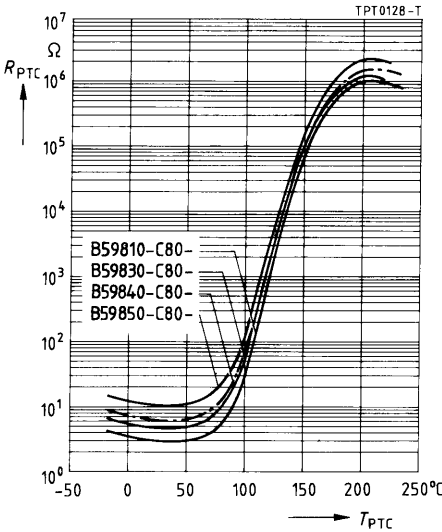


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

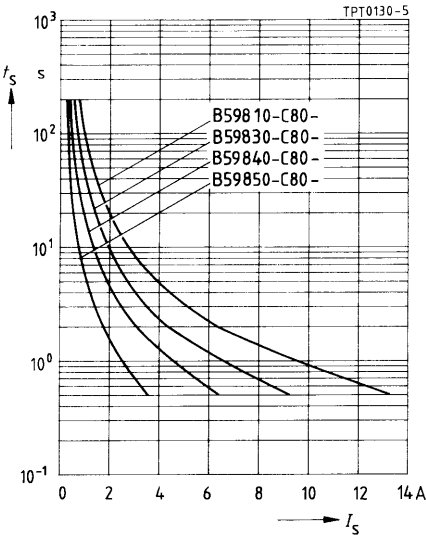

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

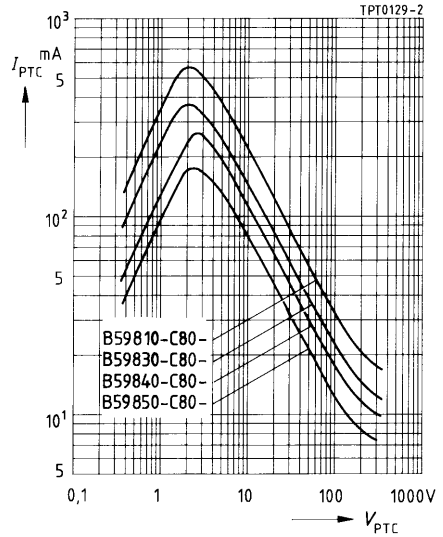


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

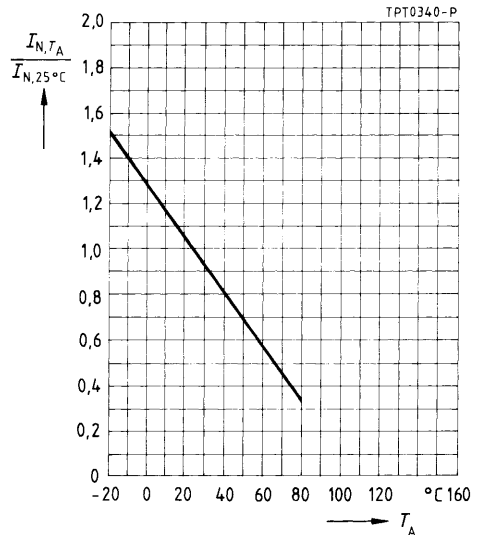


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

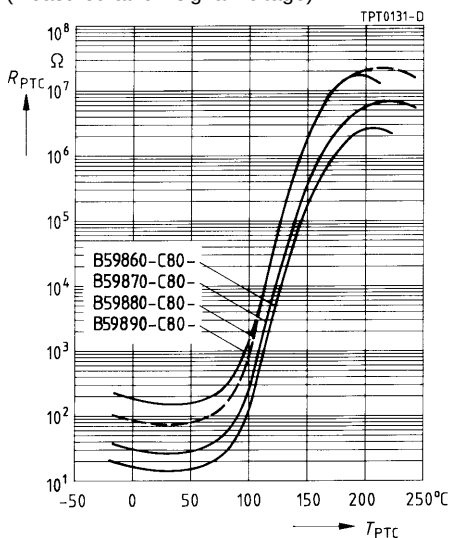


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

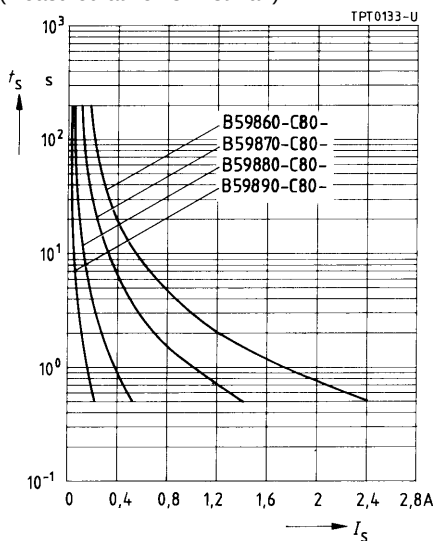

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

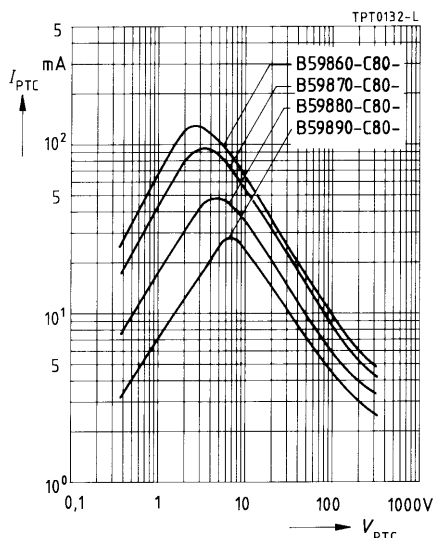

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

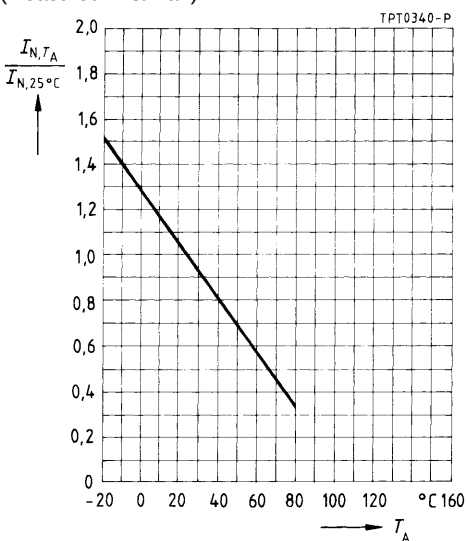

265 V, 135 °C

Applications


- Overcurrent and short-circuit protection
- For enhanced rated current requirements

Features

- Coated thermistor disk
- Surge-proof
- Manufacturer's logo and type designation stamped on in white

Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape



TPT0355 - 3

Dimensions (mm)


| Type  | $b_{\max}$ | $\varnothing d$ | $h_{\max}$ |
|-------|------------|-----------------|------------|
| C 811 | 26,0       | 0,8             | 29,5       |
| C 831 | 22,0       | 0,6             | 25,5       |
| C 841 | 17,5       | 0,6             | 21,0       |
| C 851 | 13,5       | 0,6             | 17,0       |
| C 861 | 11,0       | 0,6             | 14,5       |
| C 871 | 9,0        | 0,6             | 12,5       |
| C 881 | 6,5        | 0,6             | 10,0       |
| C 891 | 4,0        | 0,5             | 7,5        |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$       | 265        | V  |
| Rated voltage                                   | $V_N$            | 220        | V  |
| Switching cycles (typ.)                         | $N$              | 100        |    |
| Reference temperature                           | $T_{\text{Ref}}$ | 135        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 25\%$ |    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-25/+125$ | °C |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$  | 0/60       | °C |


| Type  | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $t_S$ | $I_f$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | Ordering code   |
|-------|-------|-------|-----------------------------------|-------|-----------------------------|----------|------------|-----------------|
|       | mA    | mA    | A                                 | s     | mA                          | $\Omega$ | $\Omega$   |                 |
| C 811 | 730   | 1450  | 10,0                              | <10   | 25                          | 2,6      | 1,8        | B59811-C135-A70 |
| C 831 | 470   | 970   | 7,0                               | < 8   | 20                          | 3,7      | 2,6        | B59831-C135-A70 |
| C 841 | 350   | 700   | 4,1                               | < 8   | 15                          | 6        | 4,3        | B59841-C135-A70 |
| C 851 | 215   | 445   | 2,2                               | < 8   | 13                          | 10       | 7,1        | B59851-C135-A70 |
| C 861 | 150   | 320   | 1,5                               | < 8   | 10                          | 15       | 10,6       | B59861-C135-A70 |
| C 871 | 108   | 225   | 1,0                               | < 8   | 9                           | 25       | 17,8       | B59871-C135-A70 |
| C 881 | 60    | 120   | 0,4                               | < 8   | 6                           | 70       | 49,8       | B59881-C135-A70 |
| C 891 | 30    | 65    | 0,2                               | < 8   | 5                           | 150      | 107        | B59891-C135-A70 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

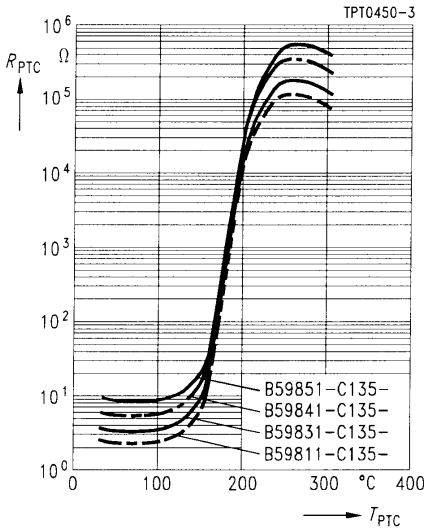


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

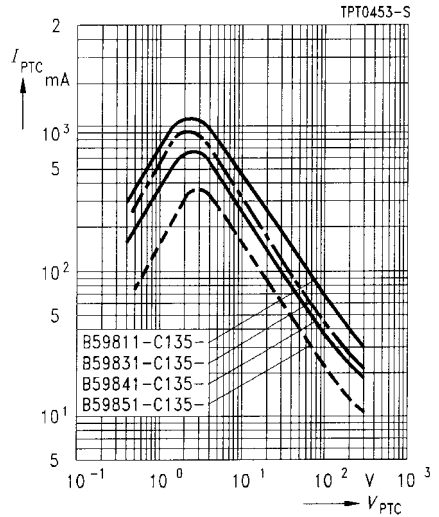

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

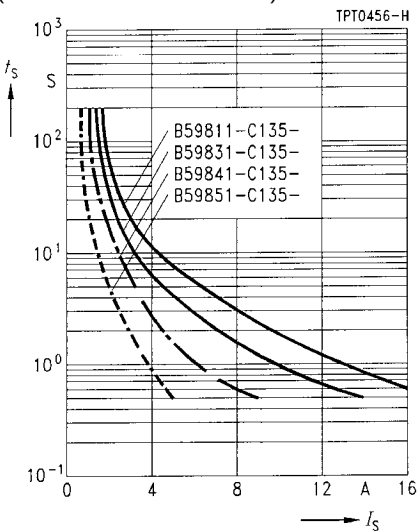


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

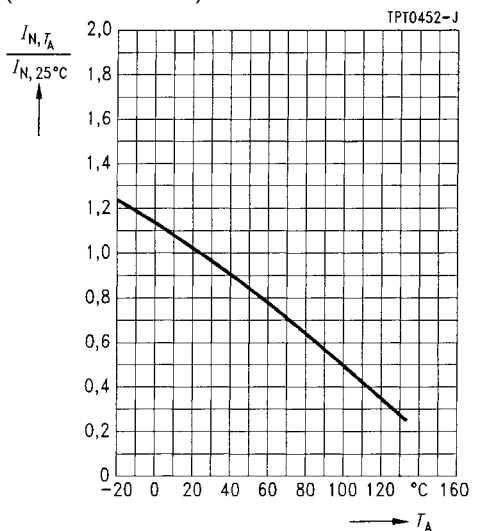


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

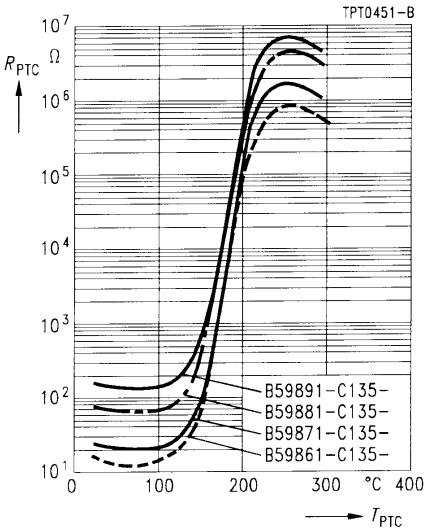


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25  $^{\circ}C$  in still air)

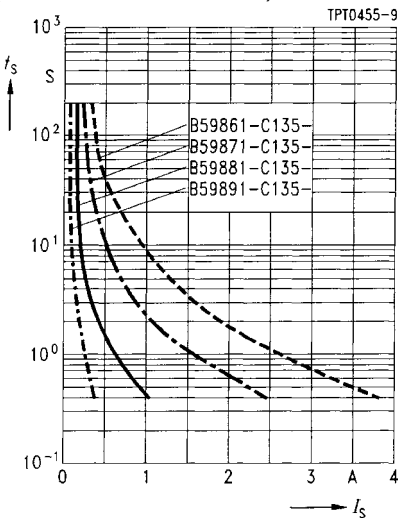

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25  $^{\circ}C$  in still air)

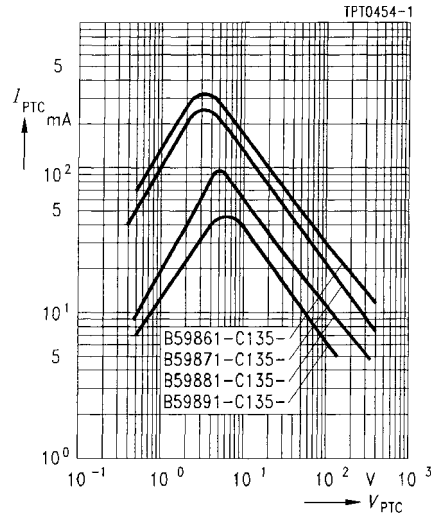

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

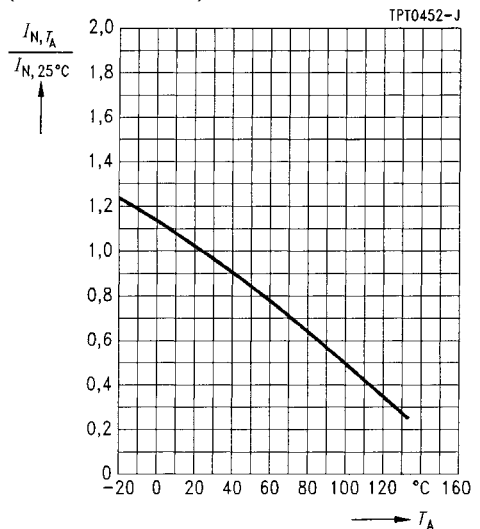



265 V to 550 V, 120 °C

Applications


- Overcurrent and short-circuit protection

Features

- Coated thermistor disk
- Manufacturer's logo and type designation stamped on in white
- UL approval (E69802) for all types up to 265 V

Options

- Leadless disks and leaded disks without coating available upon request
- Thermistors with diameter  $b \leq 11,0$  mm are also available on tape
- VDE/ CECC approval for various 265-V types upon request



TPT0355 - 3

Dimensions (mm)

| Type  | $b_{\max}$ | $\varnothing d$ | $h_{\max}$ |
|-------|------------|-----------------|------------|
| C 810 | 26,0       | 0,8             | 29,5       |
| C 830 | 22,0       | 0,6             | 25,5       |
| C 840 | 17,5       | 0,6             | 21,0       |
| C 850 | 13,5       | 0,6             | 17,0       |
| C 860 | 11,0       | 0,6             | 14,5       |
| C 870 | 9,0        | 0,6             | 12,5       |
| C 872 | 9,0        | 0,6             | 12,5       |
| C 873 | 9,0        | 0,6             | 12,5       |
| C 874 | 9,0        | 0,6             | 12,5       |
| C 875 | 9,0        | 0,6             | 12,5       |
| C 880 | 6,5        | 0,6             | 10,0       |
| C 883 | 6,5        | 0,6             | 10,0       |
| C 884 | 6,5        | 0,6             | 10,0       |
| C 885 | 6,5        | 0,6             | 10,0       |
| C 886 | 6,5        | 0,6             | 10,0       |
| C 890 | 4,0        | 0,5             | 7,5        |


|                                         |              |              |    |
|-----------------------------------------|--------------|--------------|----|
| Switching cycles (typ.)                 | $N$          | 100          |    |
| Switching time                          | $t_s$        | $\leq 8$     | s  |
| Resistance tolerance                    | $\Delta R_N$ | $\pm 25 \%$  |    |
| Operating temperature range ( $V = 0$ ) | $T_{op}$     | $- 25/+ 125$ | °C |
| ( $V = V_{\max}$ )                      | $T_{op}$     | 0/60         | °C |

**B598\*\***  
**C 810 ... C 890**


| Type                                                                                       | $I_N$<br>mA | $I_S$<br>mA | $I_{Smax}$<br>( $V=V_{max}$ )<br>A | $I_r$<br>( $V=V_{max}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{min}$<br>$\Omega$ | Ordering code   |
|--------------------------------------------------------------------------------------------|-------------|-------------|------------------------------------|--------------------------------|-------------------|-----------------------|-----------------|
| $V_{max} = 265 \text{ V}$ , $V_N = 220 \text{ V}$ , $T_{Ref} = 120 \text{ }^\circ\text{C}$ |             |             |                                    |                                |                   |                       |                 |
| C 810                                                                                      | 650         | 1300        | 10,0                               | 25                             | 2,6               | 1,6                   | B59810-C120-A70 |
| C 830                                                                                      | 460         | 920         | 7,0                                | 20                             | 3,7               | 2,4                   | B59830-C120-A70 |
| C 840                                                                                      | 330         | 660         | 4,1                                | 15                             | 6                 | 3,8                   | B59840-C120-A70 |
| C 850                                                                                      | 200         | 400         | 2,2                                | 13                             | 10                | 6,4                   | B59850-C120-A70 |
| C 860                                                                                      | 140         | 280         | 1,5                                | 10                             | 15                | 9,0                   | B59860-C120-A70 |
| C 870                                                                                      | 100         | 200         | 1,0                                | 9                              | 25                | 15                    | B59870-C120-A70 |
| C 872                                                                                      | 80          | 160         | 1,0                                | 9                              | 35                | 21                    | B59872-C120-A70 |
| C 873                                                                                      | 70          | 140         | 1,0                                | 9                              | 45                | 27                    | B59873-C120-A70 |
| C 874                                                                                      | 60          | 125         | 1,0                                | 9                              | 55                | 31                    | B59874-C120-A70 |
| C 875                                                                                      | 55          | 110         | 1,0                                | 9                              | 65                | 36                    | B59875-C120-A70 |
| C 880                                                                                      | 55          | 110         | 0,4                                | 6                              | 70                | 39                    | B59880-C120-A70 |
| C 883                                                                                      | 35          | 70          | 0,4                                | 5                              | 120               | 67                    | B59883-C120-A70 |
| C 890                                                                                      | 30          | 60          | 0,2                                | 5                              | 150               | 84                    | B59890-C120-A70 |
| $V_{max} = 420 \text{ V}$ , $V_N = 380 \text{ V}$ , $T_{Ref} = 120 \text{ }^\circ\text{C}$ |             |             |                                    |                                |                   |                       |                 |
| C 884                                                                                      | 21          | 39          | 0,2                                | 3                              | 600               | 340                   | B59884-C120-A70 |
| $V_{max} = 550 \text{ V}$ , $V_N = 500 \text{ V}$ , $T_{Ref} = 110 \text{ }^\circ\text{C}$ |             |             |                                    |                                |                   |                       |                 |
| C 885                                                                                      | 15          | 30          | 0,1                                | 3                              | 1200              | 675                   | B59885-C120-A70 |
| C 886                                                                                      | 12          | 24          | 0,1                                | 2                              | 1500              | 840                   | B59886-C120-A70 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

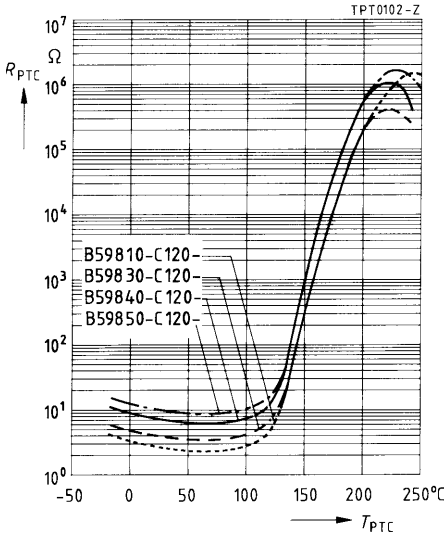


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

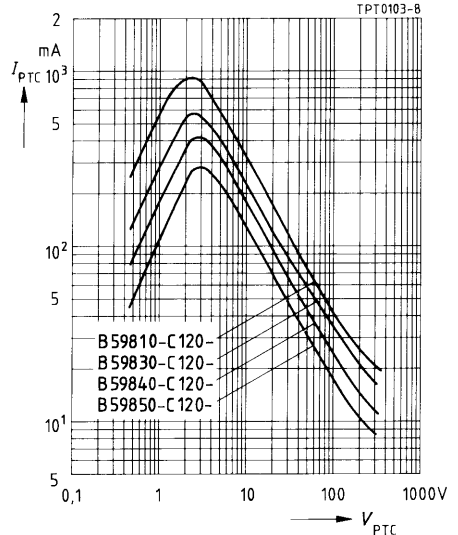

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

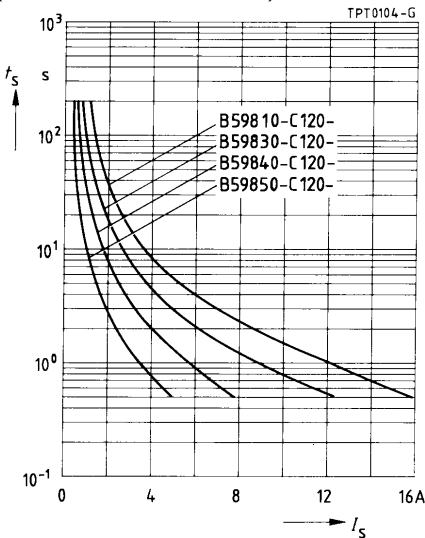


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

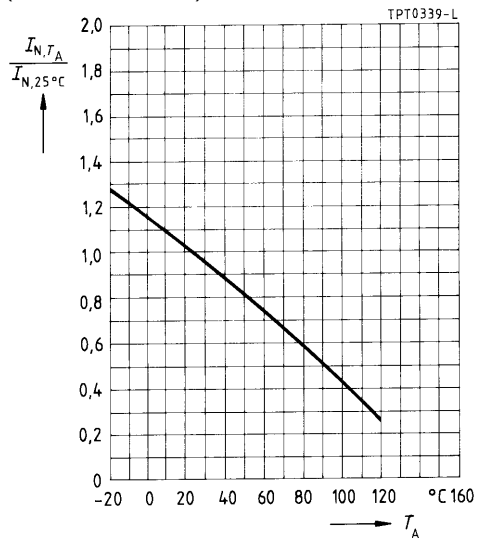


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

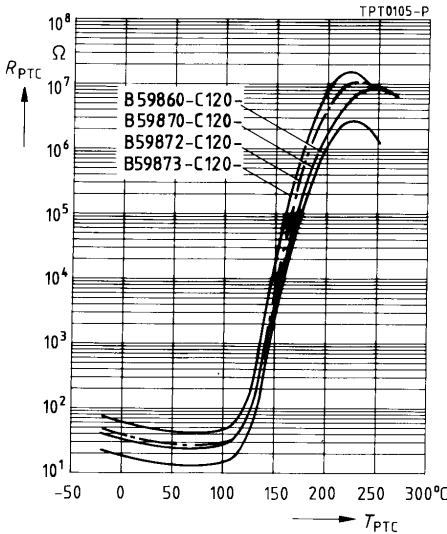


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25  $^{\circ}C$  in still air)

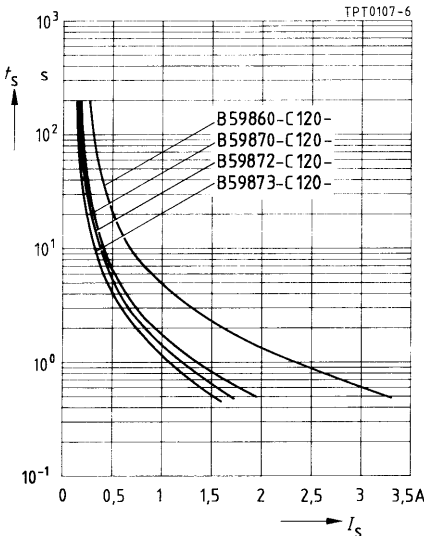

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25  $^{\circ}C$  in still air)

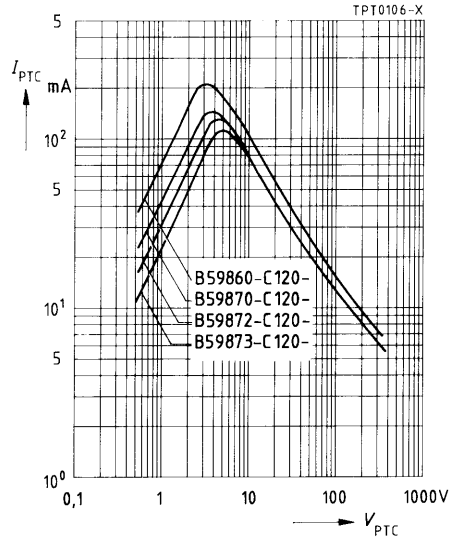


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

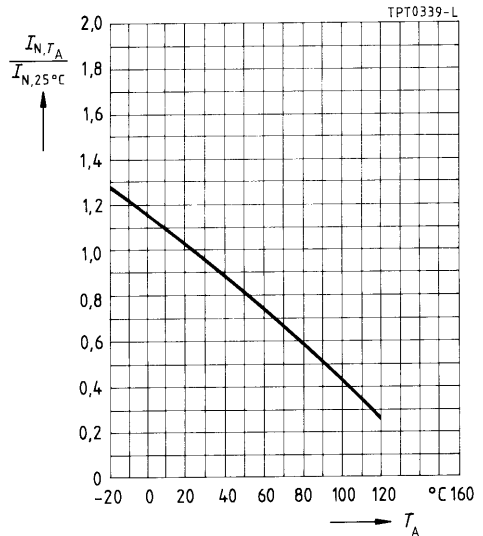


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

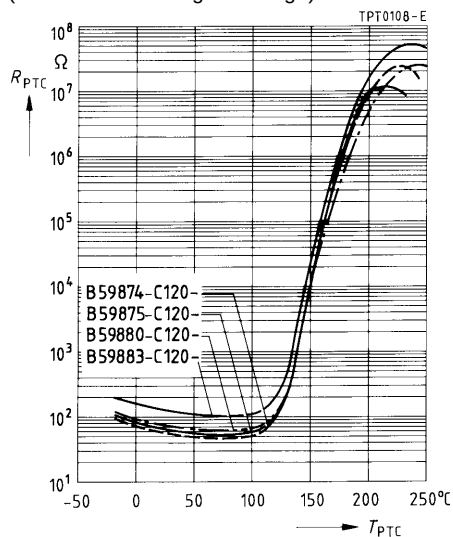


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

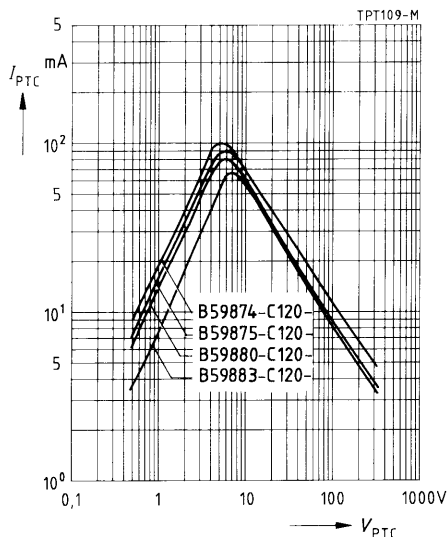

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

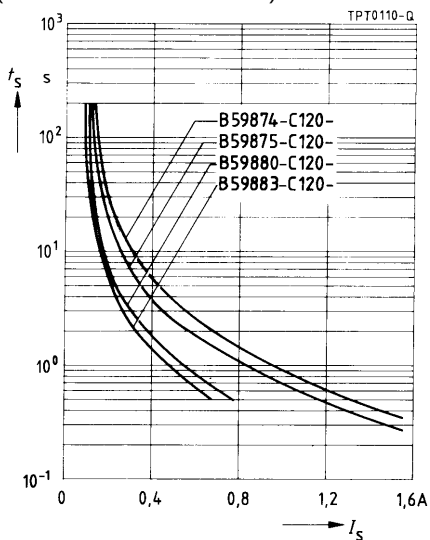


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

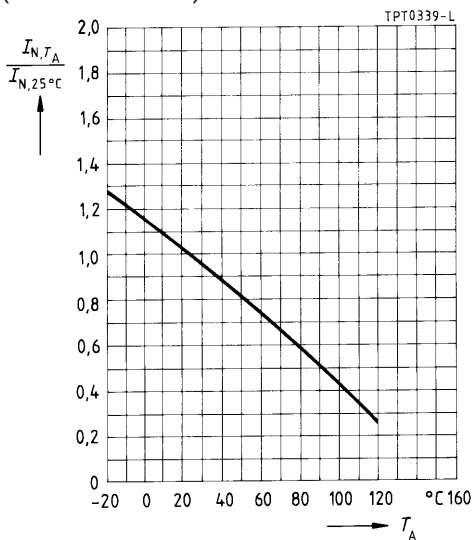


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

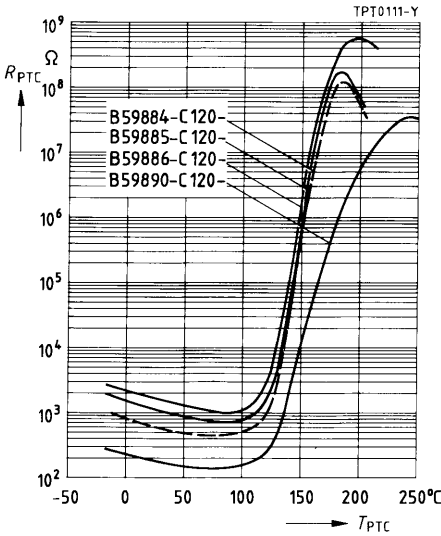


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

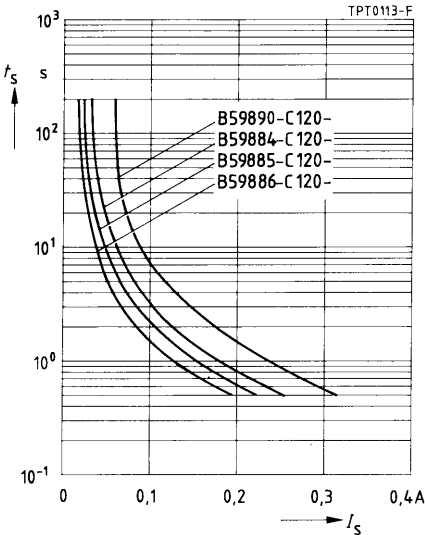

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

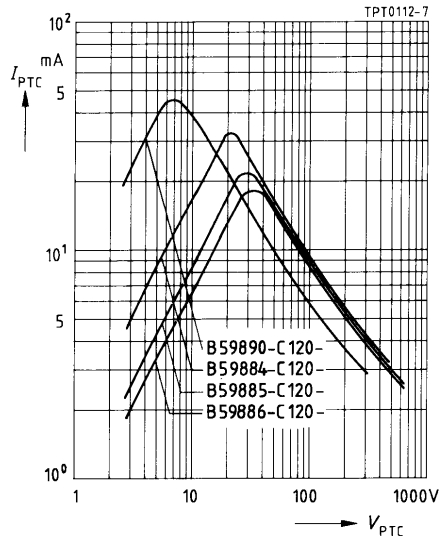

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

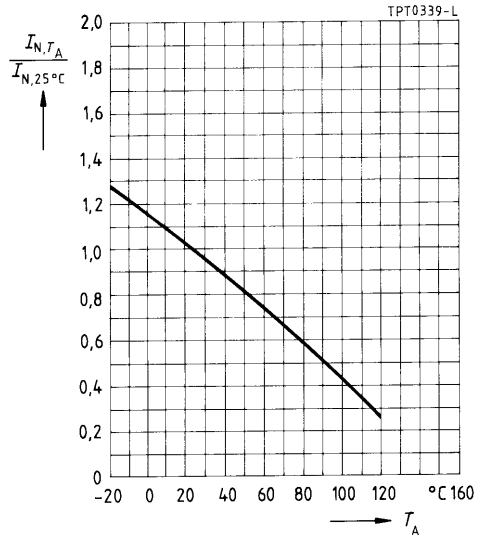


420 V to 1000 V

Applications

- Overcurrent and short-circuit protection

Features

- Uncoated thermistor disk
- Marking stamped on in black
- UL approval (E69802) for all types up to 420 V (exception: B 758)



Dimensions (mm)


| Type  | $b_{\max}$ | $h_{\max}$ | $s_{\max}$ |
|-------|------------|------------|------------|
| B 75* | 12,5       | 16,5       | 7,0        |
| B 77* | 8,5        | 12,1       | 7,0        |

|                                         |                 |            |    |
|-----------------------------------------|-----------------|------------|----|
| Switching cycles (typ.)                 | $N$             | 100        |    |
| Operating temperature range ( $V = 0$ ) | $T_{\text{op}}$ | - 25/+ 125 | °C |
| ( $V = V_{\max}$ )                      | $T_{\text{op}}$ | 0/60       | °C |


| Type                                                                                                                            | $I_N$<br>mA | $I_S$<br>mA | $I_{S\max}$<br>( $V = V_{\max}$ )<br>A | $t_S$<br>s | $I_r$<br>( $V = V_{\max}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{\min}$<br>$\Omega$ | Ordering code   |
|---------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|----------------------------------------|------------|-----------------------------------|-------------------|------------------------|-----------------|
| $V_{\max} = 420 \text{ V}$ , $V_N = 380 \text{ V}$ , $T_{\text{Ref}} = 120 \text{ }^\circ\text{C}$ , $\Delta R_N = \pm 25 \%$   |             |             |                                        |            |                                   |                   |                        |                 |
| B 750                                                                                                                           | 123         | 245         | 2,0                                    | < 6        | 4,0                               | 25                | 13                     | B59750-B120-A70 |
| B 751                                                                                                                           | 87          | 173         | 2,0                                    | < 4        | 3,5                               | 50                | 26                     | B59751-B120-A70 |
| B 752                                                                                                                           | 69          | 137         | 2,0                                    | < 4        | 3,5                               | 80                | 42                     | B59752-B120-A70 |
| B 770                                                                                                                           | 64          | 127         | 1,4                                    | < 4        | 3,5                               | 70                | 45                     | B59770-B120-A70 |
| B 753                                                                                                                           | 56          | 112         | 2,0                                    | < 3        | 3,0                               | 120               | 63                     | B59753-B120-A70 |
| B 754                                                                                                                           | 50          | 100         | 2,0                                    | < 3        | 3,0                               | 150               | 68                     | B59754-B120-A70 |
| B 771                                                                                                                           | 49          | 97          | 1,4                                    | < 3        | 2,5                               | 120               | 76                     | B59771-B120-A70 |
| B 772                                                                                                                           | 43          | 86          | 1,4                                    | < 3        | 2,5                               | 150               | 96                     | B59772-B120-A70 |
| $V_{\max} = 550 \text{ V}$ , $V_N = 500 \text{ V}$ , $T_{\text{Ref}} = 115 \text{ }^\circ\text{C}$ , $\Delta R_N = \pm 25 \%$   |             |             |                                        |            |                                   |                   |                        |                 |
| B 755                                                                                                                           | 28          | 55          | 1,4                                    | < 3        | 2,0                               | 500               | 230                    | B59755-B115-A70 |
| $V_{\max} = 550 \text{ V}$ , $V_N = 500 \text{ V}$ , $T_{\text{Ref}} = 120 \text{ }^\circ\text{C}$ , $\Delta R_N = \pm 25 \%$   |             |             |                                        |            |                                   |                   |                        |                 |
| B 773                                                                                                                           | 24          | 48          | 1,0                                    | < 3        | 2,0                               | 500               | 320                    | B59773-B120-A70 |
| $V_{\max} = 550 \text{ V}$ , $V_N = 500 \text{ V}$ , $T_{\text{Ref}} = 115 \text{ }^\circ\text{C}$ , $\Delta R_N = \pm 25 \%$   |             |             |                                        |            |                                   |                   |                        |                 |
| B 774                                                                                                                           | 16          | 32          | 1,0                                    | < 2        | 1,5                               | 1100              | 700                    | B59774-B115-A70 |
| $V_{\max} = 1000 \text{ V}$ , $V_N = 1000 \text{ V}$ , $T_{\text{Ref}} = 110 \text{ }^\circ\text{C}$ , $\Delta R_N = \pm 33 \%$ |             |             |                                        |            |                                   |                   |                        |                 |
| B 758                                                                                                                           | 8           | 17          | 0,5                                    | < 3        | 3,0                               | 7500              | 3380                   | B59758-B110-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

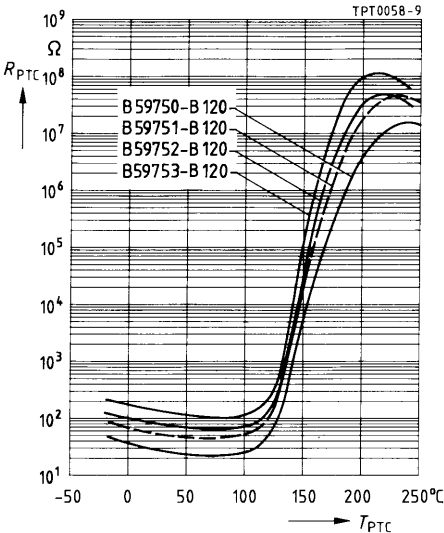


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at  $25^\circ\text{C}$  in still air)

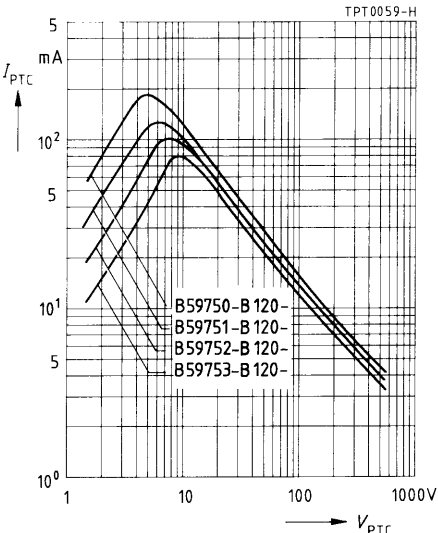

Switching time  $t_S$  versus switching current  $I_S$   
(measured at  $25^\circ\text{C}$  in still air)

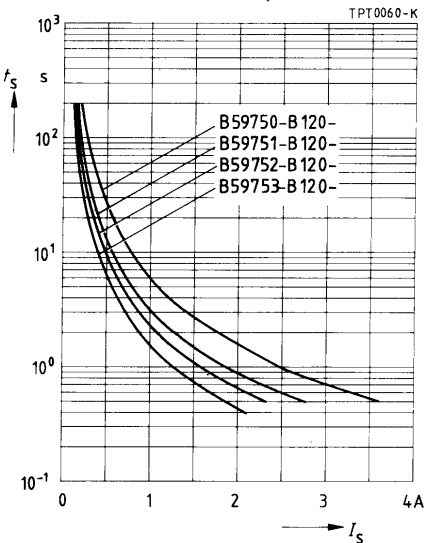


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

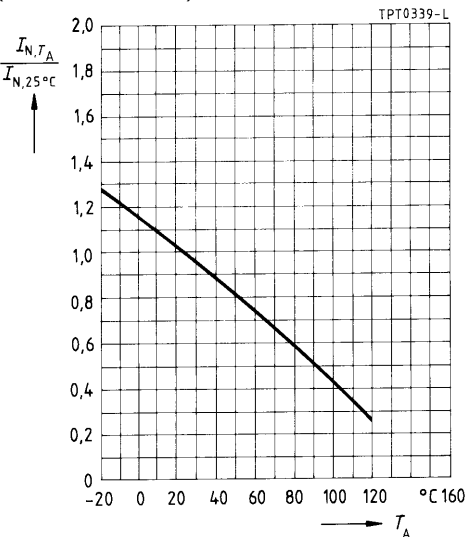




### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

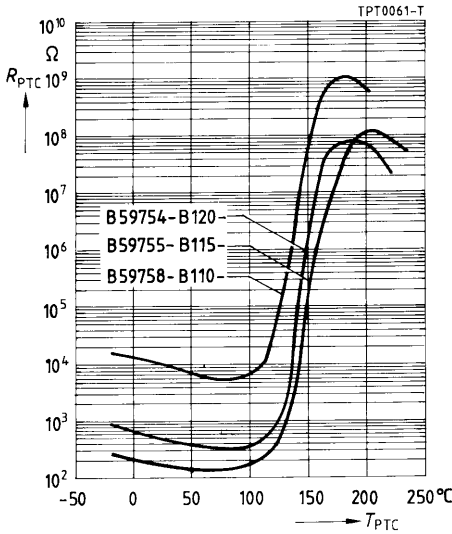


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

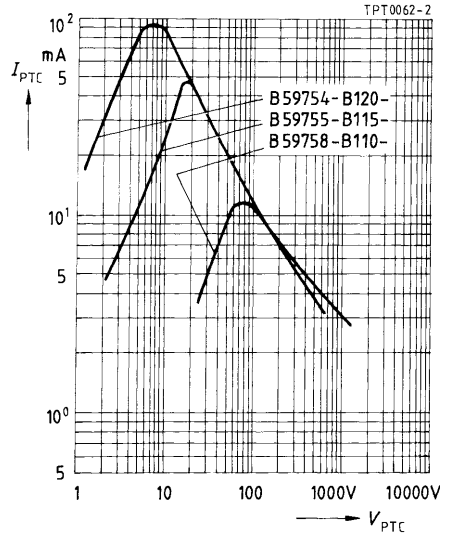

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

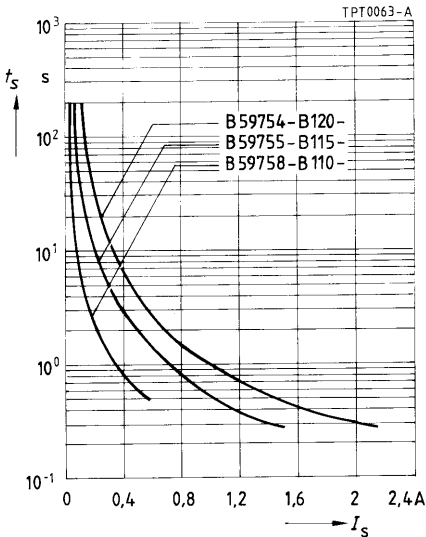


Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

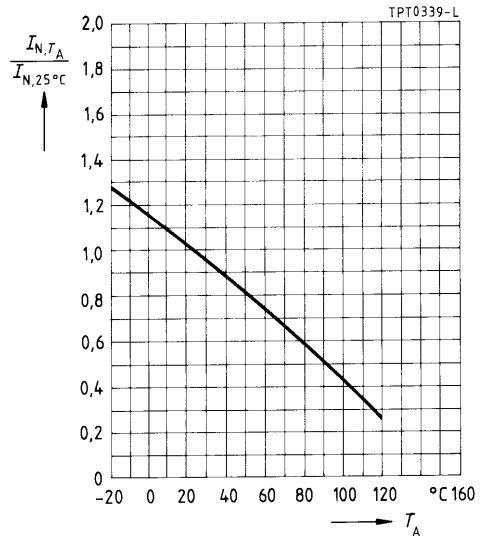


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

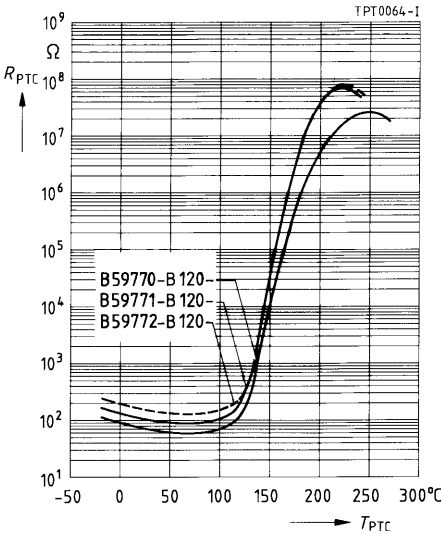


Switching time  $t_S$  versus switching current  $I_S$   
(measured at  $25^\circ\text{C}$  in still air)

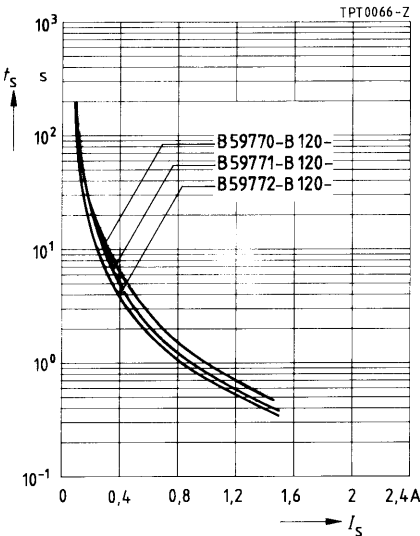

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at  $25^\circ\text{C}$  in still air)

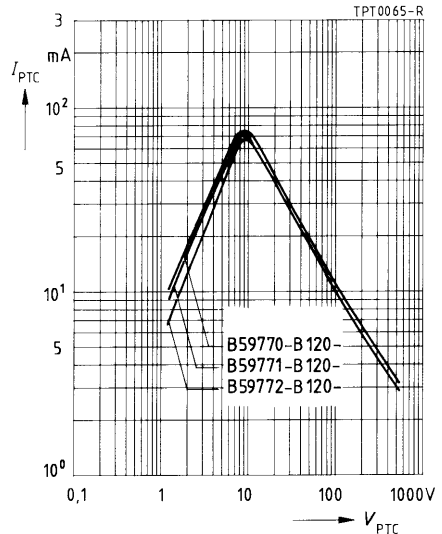


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

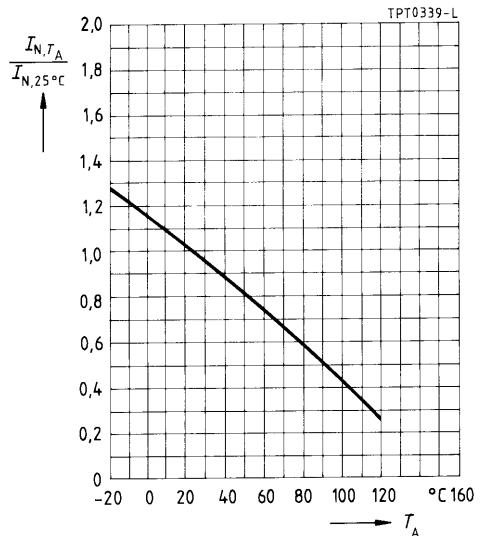


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

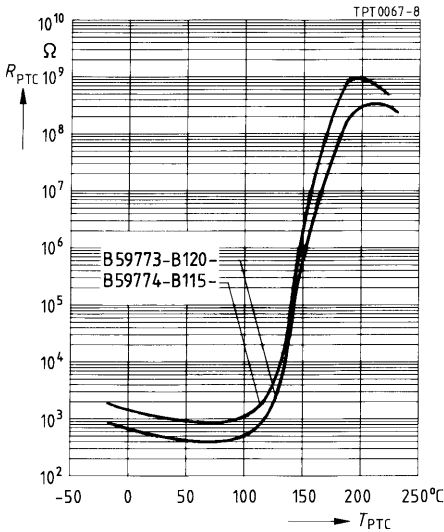


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

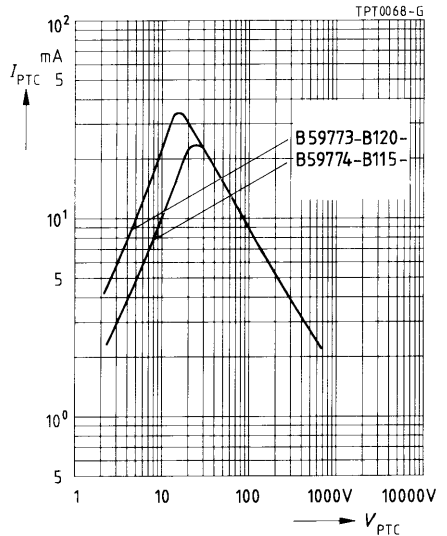

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

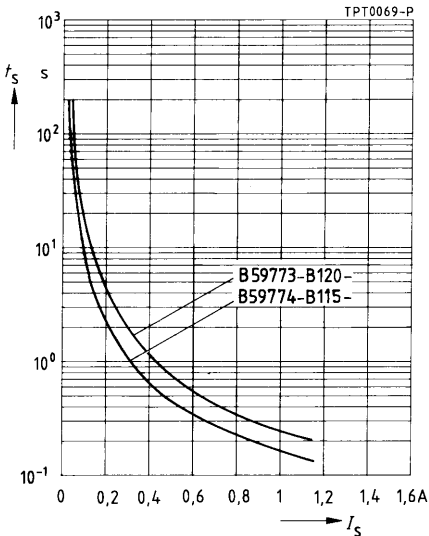

Rated current  $I_N$  versus ambient temperature  $T_A$   
 (measured in still air)

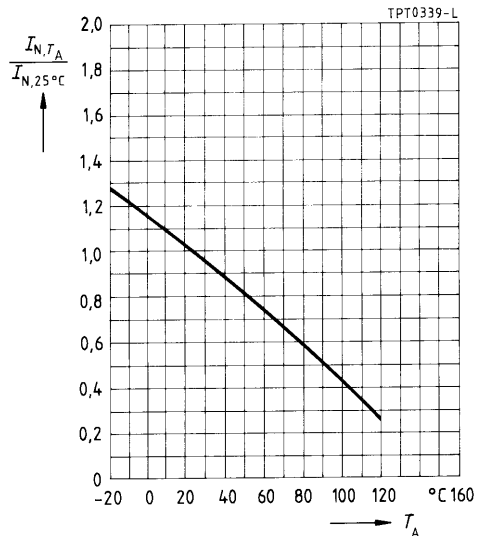


420 V to 550 V, 60 °C

**Applications**

- Overcurrent and short-circuit protection
- For high operating voltages

**Features**

- Leaded rod-type thermistor
- Low mounting height



Dimensions (mm)


| Type         | $e$          | $l_{max}$ |
|--------------|--------------|-----------|
| B 404, B 406 | $12,5 \pm 1$ | 17        |

|                                         |           |            |    |
|-----------------------------------------|-----------|------------|----|
| Switching cycles (typ.)                 | $N$       | 100        |    |
| Switching time                          | $t_S$     | < 1        |    |
| Reference temperature                   | $T_{Ref}$ | 60         | s  |
| Operating temperature range ( $V = 0$ ) | $T_{op}$  | - 25/+ 125 | °C |
| ( $V = V_{max}$ )                       | $T_{op}$  | 0/40       | °C |


| Type                                           | $I_N$<br>mA | $I_S$<br>mA | $I_{Smax}$<br>( $V=V_{max}$ )<br>A | $I_r$<br>( $V=V_{max}$ )<br>mA | $R_N$<br>$\Omega$ | $\Delta R_N$<br>% | $R_{min}$<br>$\Omega$ | Ordering code  |
|------------------------------------------------|-------------|-------------|------------------------------------|--------------------------------|-------------------|-------------------|-----------------------|----------------|
| $V_{max} = 550 \text{ V}, V_N = 500 \text{ V}$ |             |             |                                    |                                |                   |                   |                       |                |
| B 404                                          | 4           | 9           | 0,4                                | 1,0                            | 3500              | $\pm 16$          | 2880                  | B59404-B60-A40 |
| $V_{max} = 500 \text{ V}, V_N = 500 \text{ V}$ |             |             |                                    |                                |                   |                   |                       |                |
| B 406                                          | 2,5         | 6,5         | 0,3                                | 1,0                            | 5500              | $\pm 28$          | 3800                  | B59406-B60-A40 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

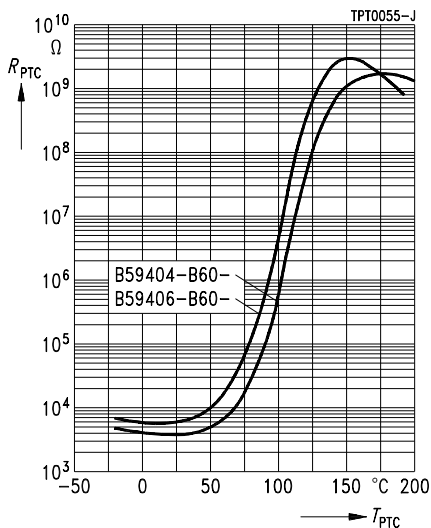

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

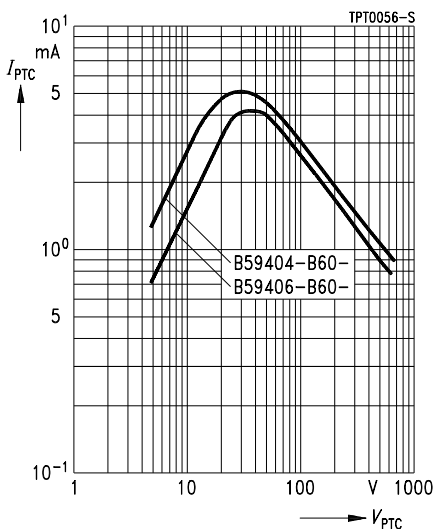

Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

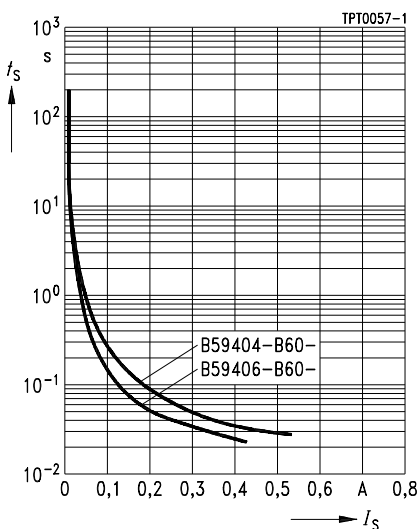

245 V, 120 °C

Applications


- Overload protection in telecom equipment (switching systems and subscriber sets)

Features

- Uncoated thermistor disk
- Marked with manufacturer's logo and type designation
- Narrow tolerance on resistance
- Impulse-tested in accordance with IEC 60-2, VDE 0433: 8/20 µs
- 600-V-tested upon request

Options

- Alternative tolerances upon request
- Leadless and single-ended disks upon request
- Also available on tape



Dimensions (mm)


| Type   | $b_{\text{max}}$ | $h_{\text{max}}$ | $s$ |
|--------|------------------|------------------|-----|
| S 1022 | 10,2             | 14,1             | 4,0 |
| S 1023 | 8,2              | 12,1             | 4,0 |
| S 1024 | 8,2              | 12,1             | 4,0 |
| S 1025 | 6,6              | 10,5             | 4,0 |

|                                                 |                  |            |    |
|-------------------------------------------------|------------------|------------|----|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\text{max}}$ | 245        | V  |
| Rated voltage                                   | $V_N$            | 220        | V  |
| Switching cycles (typ.)                         | $N$              | 150        |    |
| Switching time                                  | $t_S$            | $\leq 8$   | s  |
| Reference temperature                           | $T_{\text{Ref}}$ | 120        | °C |
| Resistance tolerance                            | $\Delta R_N$     | $\pm 15\%$ |    |
| Pulse strength                                  | $V_P$            | 1000       | V  |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$  | $-25/+125$ | °C |
| ( $V = V_{\text{max}}$ )                        | $T_{\text{op}}$  | 0/60       | °C |


| Type   | $I_N$<br>mA | $I_S$<br>mA | $I_{S\text{max}}$<br>( $V = V_{\text{max}}$ )<br>A | $I_r$<br>( $V = V_{\text{max}}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{\text{min}}$<br>$\Omega$ | Ordering code    |
|--------|-------------|-------------|----------------------------------------------------|-----------------------------------------|-------------------|------------------------------|------------------|
| S 1022 | 200         | 400         | 2,5                                                | 10                                      | 10                | 7,5                          | B59022-S1120-A70 |
| S 1023 | 100         | 200         | 2,8                                                | 10                                      | 25                | 15                           | B59023-S1120-A70 |
| S 1024 | 80          | 160         | 1,0                                                | 9                                       | 35                | 25                           | B59024-S1120-A70 |
| S 1025 | 55          | 110         | 0,4                                                | 6                                       | 70                | 55                           | B59025-S1120-A70 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

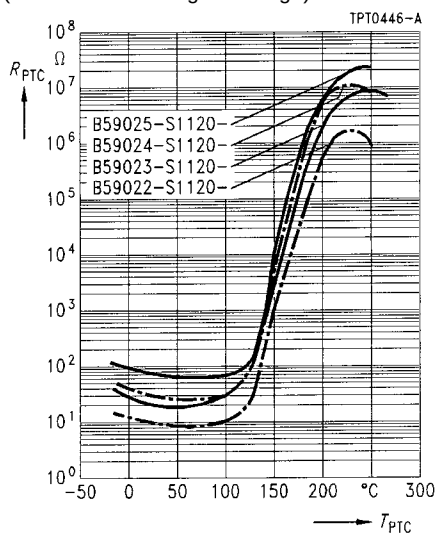


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

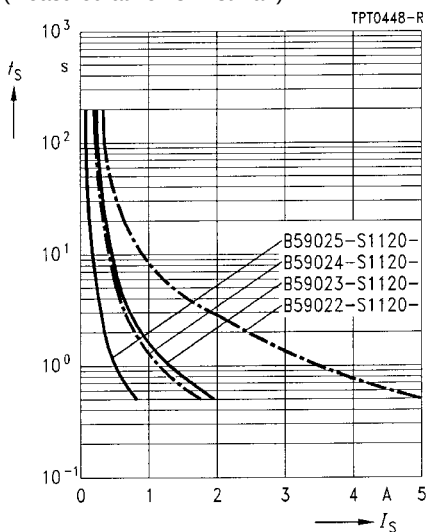

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

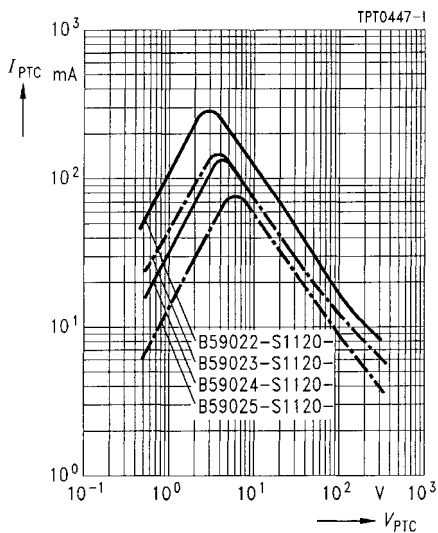

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

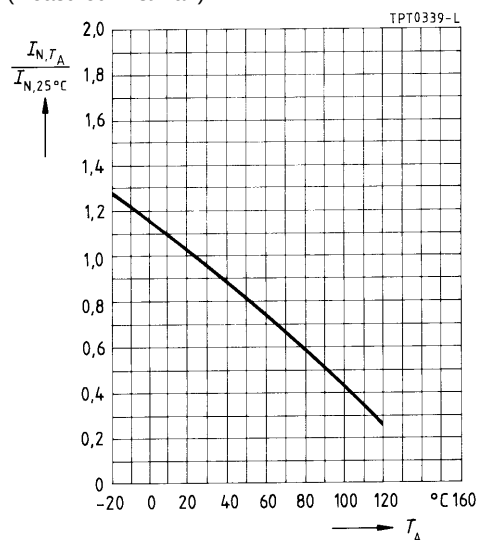


80 V, 120 °C

Applications

- Overcurrent protection
- Time delay
- Current stabilization

Features

- Thermistor chip with silver terminations
- Small size
- Short response times
- Suitable for reflow soldering, also for conductive adhesion
- Suitable for automatic placement
- Available on tape (standard delivery mode)



 Termination

Dimensions (mm)  
Tolerances ( $l$ ,  $b$ ,  $h$ )  $\pm 0,2$  mm

| Type   | $l$ | $b$ | $h$ | Size |
|--------|-----|-----|-----|------|
| A 1607 | 3,2 | 2,5 | 1,7 | 1210 |
| A 1707 | 3,2 | 2,5 | 1,7 | 1210 |

|                                                      |                  |             |    |
|------------------------------------------------------|------------------|-------------|----|
| Switching cycles (typ.)                              | $N$              | 100         |    |
| Reference temperature                                | $T_{\text{Ref}}$ | 120         | °C |
| PTC temperature ( $V = V_{\text{max}}$ )             | $T_{\text{PTC}}$ | 190         | °C |
| Resistance tolerance                                 | $\Delta R_N$     | $\pm 25 \%$ |    |
| Operating temperature range ( $V = 0$ )              | $T_{\text{op}}$  | $-40/+125$  | °C |
| Operating temperature range ( $V = V_{\text{max}}$ ) | $T_{\text{op}}$  | 0/60        | °C |


| Type                                                   | $I_N^{1)}$<br>mA | $I_S^{1)}$<br>mA | $I_{\text{Smax}}$<br>( $V = V_{\text{max}}$ )<br>A | $R_N$<br>$\Omega$ | $R_{\text{min}}$<br>$\Omega$ | $t_S$<br>s | Ordering code    |
|--------------------------------------------------------|------------------|------------------|----------------------------------------------------|-------------------|------------------------------|------------|------------------|
| $V_{\text{max}} = 80 \text{ V}$ , $V_N = 63 \text{ V}$ |                  |                  |                                                    |                   |                              |            |                  |
| A 1707                                                 | 45               | 90               | 0,3                                                | 125               | 75                           | < 2,5      | B59707-A1120-A62 |
| $V_{\text{max}} = 30 \text{ V}$ , $V_N = 24 \text{ V}$ |                  |                  |                                                    |                   |                              |            |                  |
| A 1607                                                 | 65               | 130              | 0,4                                                | 55                | 30                           | < 5,0      | B59607-A1120-A62 |

<sup>1)</sup> Measured peak-to-peak




### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

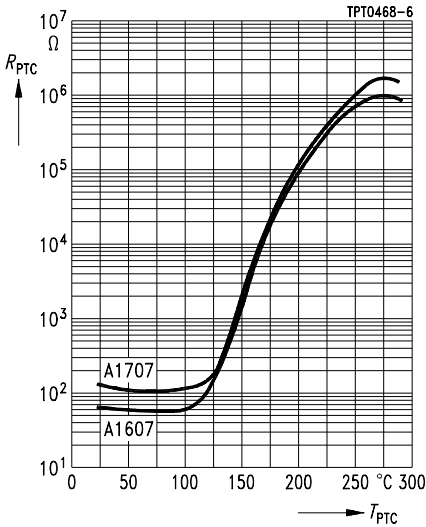

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

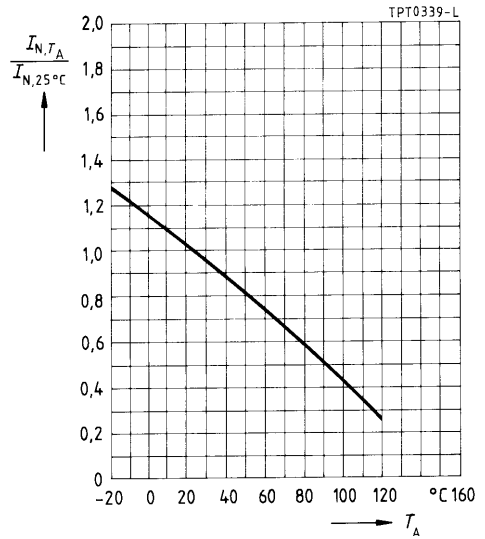


30 V

Applications

- Overcurrent protection
- Short-circuit protection

Features

- Molded epoxy encapsulation, tinned solder terminals
- Suitable for wave and reflow soldering
- Suitable for automatic placement
- Available on tape (standard delivery mode)



Dimensions (mm)  
Tolerances  $\pm 0,5 \text{ mm}$


| Type   | $h$ | $b$ | $l$  | $x$ | Size |
|--------|-----|-----|------|-----|------|
| P 1101 | 3,2 | 6,3 | 8,0  | 1,7 | 3225 |
| P 1201 | 3,2 | 6,3 | 8,0  | 1,7 | 3225 |
| P 1301 | 3,2 | 8,0 | 10,0 | 2,3 | 4032 |

|                                                              |                  |             |                  |
|--------------------------------------------------------------|------------------|-------------|------------------|
| Max. operating voltage ( $T_A = 60 \text{ }^\circ\text{C}$ ) | $V_{\text{max}}$ | 30          | V                |
| Rated voltage                                                | $V_N$            | 24          | V                |
| Switching cycles (typ.)                                      | $N$              | 100         |                  |
| Resistance tolerance                                         | $\Delta R_N$     | $\pm 25 \%$ |                  |
| Operating temperature range ( $V = 0$ )                      | $T_{\text{op}}$  | $-40/+125$  | $^\circ\text{C}$ |
| ( $V = V_{\text{max}}$ )                                     | $T_{\text{op}}$  | 0/60        | $^\circ\text{C}$ |


| Type                                                                | $I_N$<br>mA | $I_S$<br>mA | $I_{S\text{max}}$<br>( $V=V_{\text{max}}$ )<br>A | $I_r$<br>( $V=V_{\text{max}}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{\text{min}}$<br>$\Omega$ | $t_S$<br>( $I_{S\text{max}}$ )<br>s | Ordering code    |
|---------------------------------------------------------------------|-------------|-------------|--------------------------------------------------|---------------------------------------|-------------------|------------------------------|-------------------------------------|------------------|
| Reference temperature $T_{\text{Ref}} = 80 \text{ }^\circ\text{C}$  |             |             |                                                  |                                       |                   |                              |                                     |                  |
| P 1101                                                              | 90          | 185         | 0,7                                              | 25                                    | 13                | 7,80                         | $\leq 1,5$                          | B59101-P1080-A62 |
| P 1201                                                              | 165         | 340         | 1,0                                              | 34                                    | 4,6               | 2,70                         | $\leq 6,0$                          | B59201-P1080-A62 |
| P 1301                                                              | 205         | 420         | 1,6                                              | 38                                    | 3,1               | 1,85                         | $\leq 6,0$                          | B59301-P1080-A62 |
| Reference temperature $T_{\text{Ref}} = 120 \text{ }^\circ\text{C}$ |             |             |                                                  |                                       |                   |                              |                                     |                  |
| P 1101                                                              | 170         | 355         | 0,7                                              | 35                                    | 13                | 7,80                         | $\leq 3,0$                          | B59101-P1120-A62 |
| P 1201                                                              | 265         | 545         | 1,0                                              | 45                                    | 4,6               | 2,70                         | $\leq 12,0$                         | B59201-P1120-A62 |
| P 1301                                                              | 310         | 640         | 1,6                                              | 53                                    | 3,1               | 1,85                         | $\leq 12,0$                         | B59301-P1120-A62 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

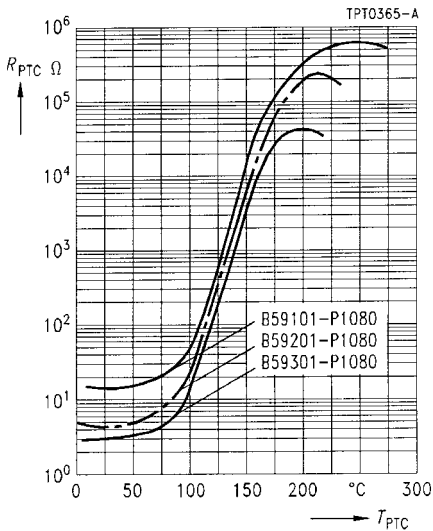


Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

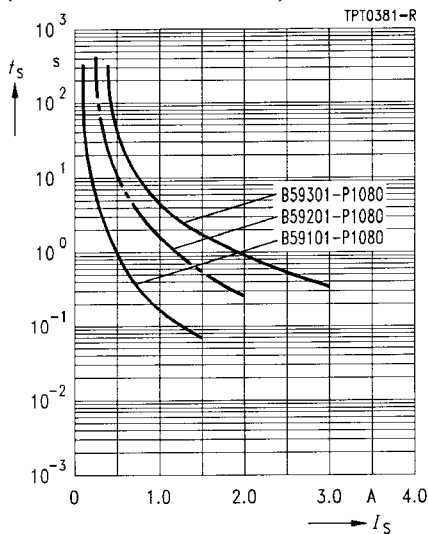

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

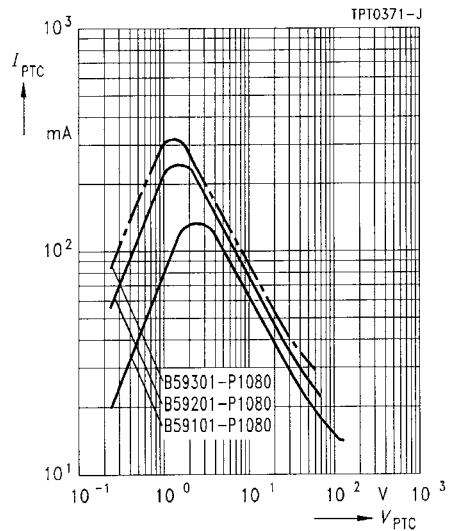


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

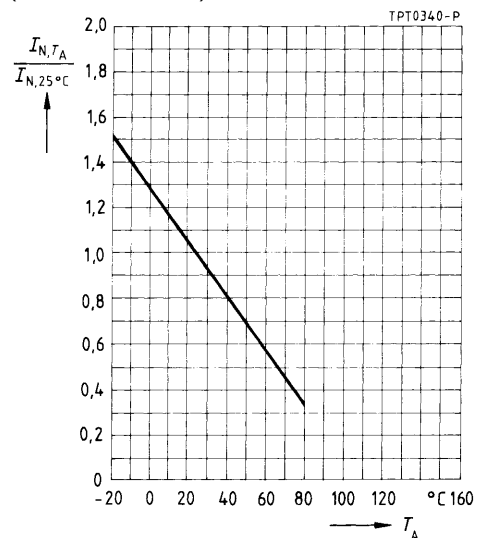


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

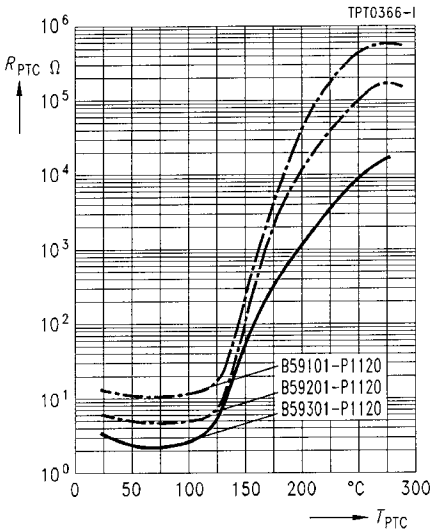


Switching time  $t_s$  versus switching current  $I_s$   
(measured at 25 °C in still air)

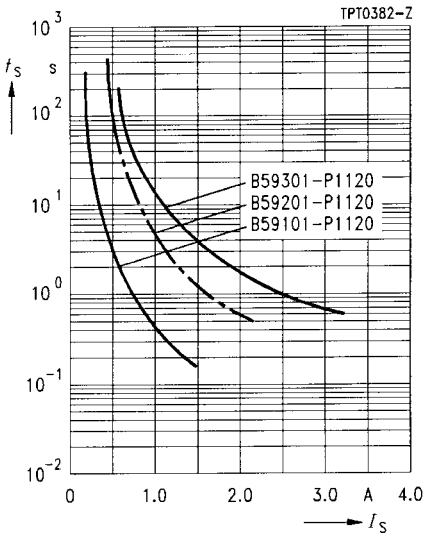

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

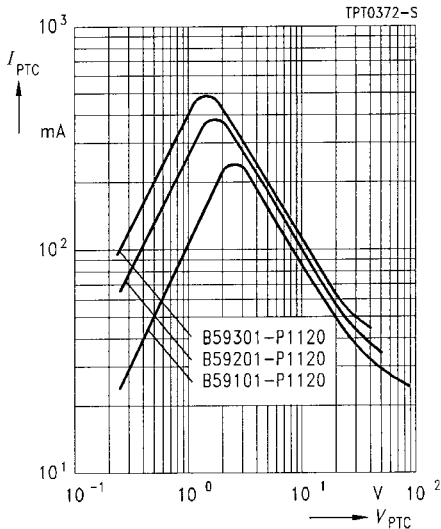

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

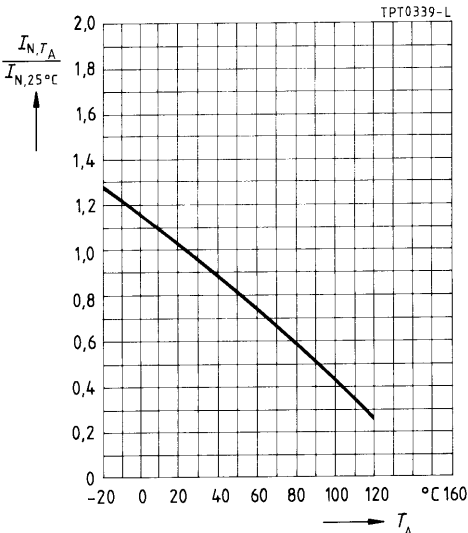


80 V

Applications

- Overcurrent protection
- Short-circuit protection

Features

- Molded epoxy encapsulation, tinned solder terminals
- Suitable for wave and reflow soldering
- Suitable for automatic placement
- Available on tape (standard delivery mode)



Dimensions (mm)  
Tolerances  $\pm 0,5$  mm


| Type   | h   | b   | l    | x   | Size |
|--------|-----|-----|------|-----|------|
| P 1115 | 3,2 | 6,3 | 8,0  | 1,7 | 3225 |
| P 1215 | 3,2 | 6,3 | 8,0  | 1,7 | 3225 |
| P 1315 | 3,2 | 8,0 | 10,0 | 2,3 | 4032 |

|                                                     |                  |            |                  |
|-----------------------------------------------------|------------------|------------|------------------|
| Max. operating voltage ( $T_A = 60^\circ\text{C}$ ) | $V_{\text{max}}$ | 80         | V                |
| Rated voltage                                       | $V_N$            | 63         | V                |
| Switching cycles (typ.)                             | N                | 100        |                  |
| Resistance tolerance                                | $\Delta R_N$     | $\pm 25\%$ |                  |
| Operating temperature range ( $V = 0$ )             | $T_{\text{op}}$  | $-40/+125$ | $^\circ\text{C}$ |
| ( $V = V_{\text{max}}$ )                            | $T_{\text{op}}$  | 0/60       | $^\circ\text{C}$ |


| Type                                                       | $I_N$<br>mA | $I_S$<br>mA | $I_{S\text{max}}$<br>( $V = V_{\text{max}}$ )<br>A | $I_r$<br>( $V = V_{\text{max}}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{\text{min}}$<br>$\Omega$ | $t_S$<br>( $I_{S\text{max}}$ )<br>s | Ordering code    |
|------------------------------------------------------------|-------------|-------------|----------------------------------------------------|-----------------------------------------|-------------------|------------------------------|-------------------------------------|------------------|
| Reference temperature $T_{\text{Ref}} = 80^\circ\text{C}$  |             |             |                                                    |                                         |                   |                              |                                     |                  |
| P 1115                                                     | 40          | 85          | 0,7                                                | 9,0                                     | 55                | 32,2                         | $\leq 0,5$                          | B59115-P1080-A62 |
| P 1215                                                     | 65          | 135         | 1,0                                                | 11,5                                    | 25                | 15,0                         | $\leq 1,5$                          | B59215-P1080-A62 |
| P 1315                                                     | 80          | 165         | 1,6                                                | 15,0                                    | 16                | 9,6                          | $\leq 1,5$                          | B59315-P1080-A62 |
| Reference temperature $T_{\text{Ref}} = 120^\circ\text{C}$ |             |             |                                                    |                                         |                   |                              |                                     |                  |
| P 1115                                                     | 70          | 145         | 0,7                                                | 13,0                                    | 55                | 32,2                         | $\leq 1,0$                          | B59115-P1120-A62 |
| P 1215                                                     | 100         | 210         | 1,0                                                | 14,0                                    | 25                | 15,0                         | $\leq 3,0$                          | B59215-P1120-A62 |
| P 1315                                                     | 150         | 310         | 1,6                                                | 20,0                                    | 16                | 9,6                          | $\leq 3,0$                          | B59315-P1120-A62 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

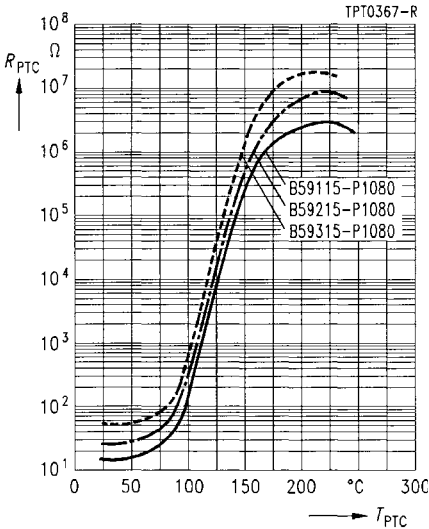


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25  $^{\circ}C$  in still air)

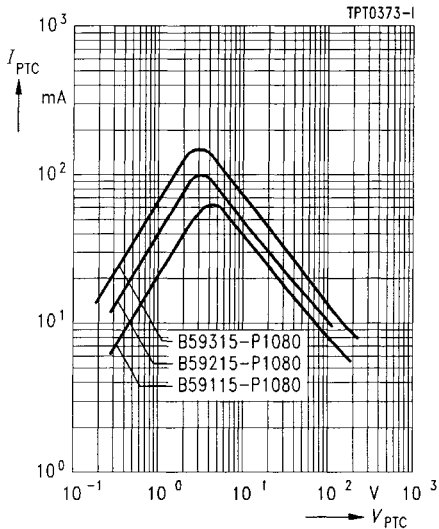

Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25  $^{\circ}C$  in still air)

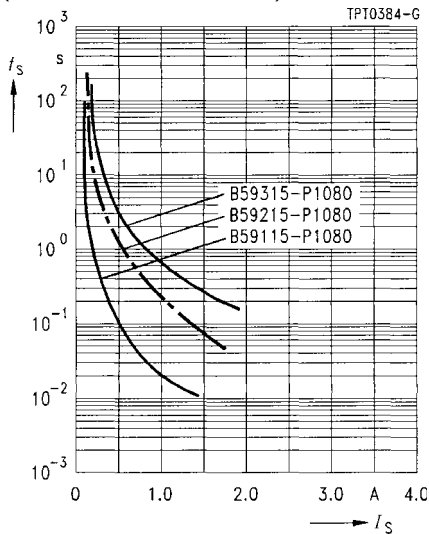


Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

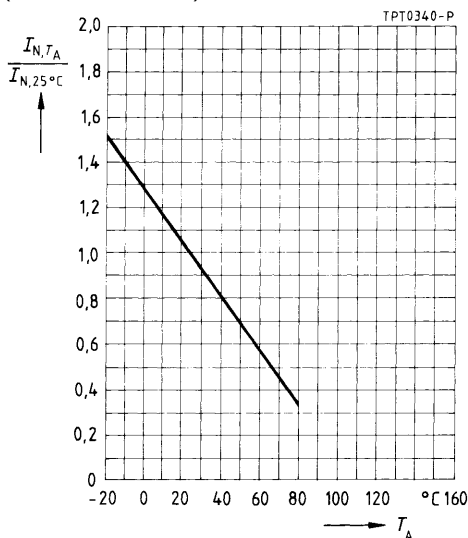


### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

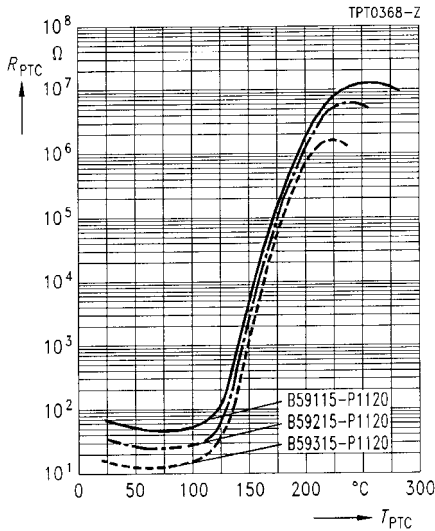


PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at 25 °C in still air)

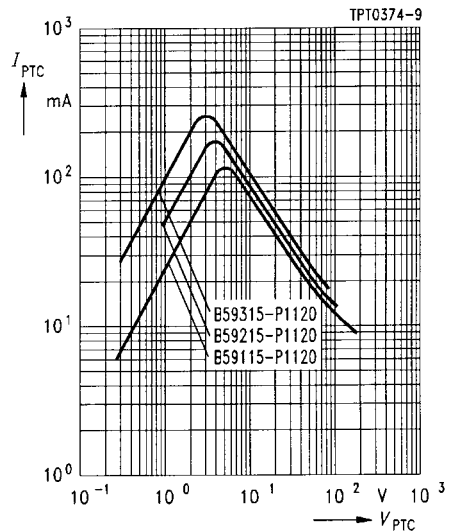

Switching time  $t_S$  versus switching current  $I_S$   
(measured at 25 °C in still air)

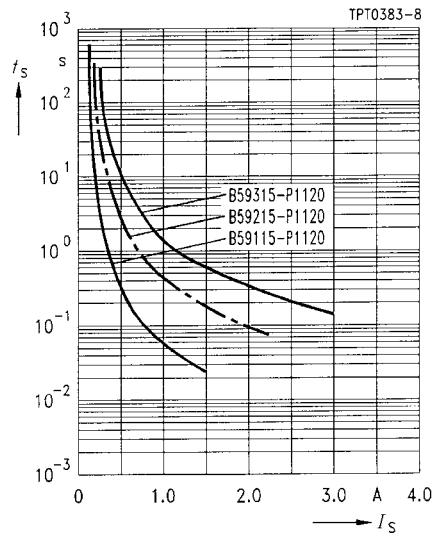

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

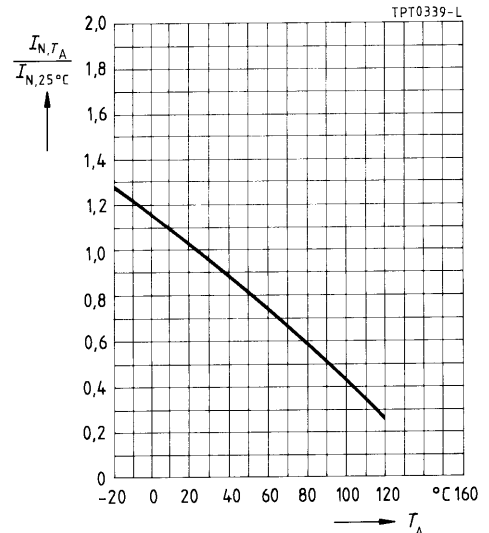


265 V

Applications

- Degaussing of picture tubes

Features

- Coated thermistor disk
- Marked with manufacturer's logo and type designation
- Low residual current
- Stable performance throughout a large number of switching cycles



TPT0529-R

Options

- Also available on tape

Dimensions (mm)

| Type   | $b_{\text{max}}$ | $s_{\text{max}}$ | $\varnothing d$ | $h_{\text{max}}$ |
|--------|------------------|------------------|-----------------|------------------|
| C 1250 | 13,5             | 5,0              | 0,6             | 17,0             |
| C 1450 | 15,0             | 5,0              | 0,6             | 19,0             |

|                                         |                  |          |                    |
|-----------------------------------------|------------------|----------|--------------------|
| Max. operating voltage                  | $V_{\text{max}}$ | 265      | $V_{\text{rms}}$   |
| Rated voltage                           | $V_N$            | 230      | $V_{\text{rms}}$   |
| Operating temperature range ( $V = 0$ ) | $T_{\text{op}}$  | -25/+125 | $^{\circ}\text{C}$ |
| ( $V = V_{\text{max}}$ )                | $T_{\text{op}}$  | 0/60     | $^{\circ}\text{C}$ |

| Type | $I_{\text{in/coil}} (0 \text{ s})$ | $I_{\text{r/coil}} (180 \text{ s})$ | $R_N$<br>$\Omega$ | $R_{\text{coil}}$<br>$\Omega$ | Ordering code |
|------|------------------------------------|-------------------------------------|-------------------|-------------------------------|---------------|
|      | $A_{\text{pp}}$                    | $\text{mA}_{\text{pp}}$             |                   |                               |               |

Reference temperature  $T_{\text{Ref}} = 75 \text{ }^{\circ}\text{C}$

|        |                                      |                                        |    |    |                  |
|--------|--------------------------------------|----------------------------------------|----|----|------------------|
| C 1250 | $\geq 11$<br>(265 $V_{\text{rms}}$ ) | $\leq 22,5$<br>(200 $V_{\text{rms}}$ ) | 25 | 25 | B59250-C1080-B70 |
|--------|--------------------------------------|----------------------------------------|----|----|------------------|

Reference temperature  $T_{\text{Ref}} = 80 \text{ }^{\circ}\text{C}$

|        |                                      |                                      |    |    |                  |
|--------|--------------------------------------|--------------------------------------|----|----|------------------|
| C 1450 | $\geq 20$<br>(230 $V_{\text{rms}}$ ) | $\leq 30$<br>(230 $V_{\text{rms}}$ ) | 18 | 12 | B59450-C1080-B70 |
|--------|--------------------------------------|--------------------------------------|----|----|------------------|







**Characteristics**

Typical curve of demagnetization current  $i_{in/coil}$   
Coil resistance: 25  $\Omega$  (T 250), 17  $\Omega$  (T 170), 10  $\Omega$  (T 100)  
Ambient temperature 25°C


T 100

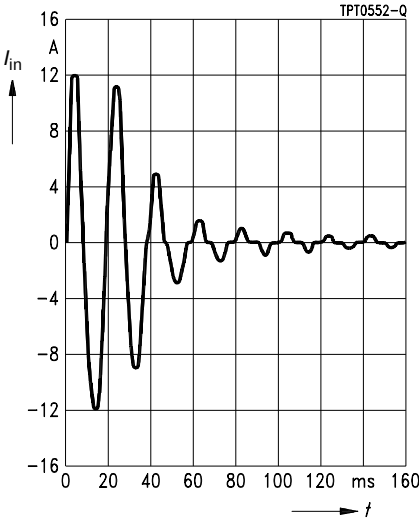

T 170

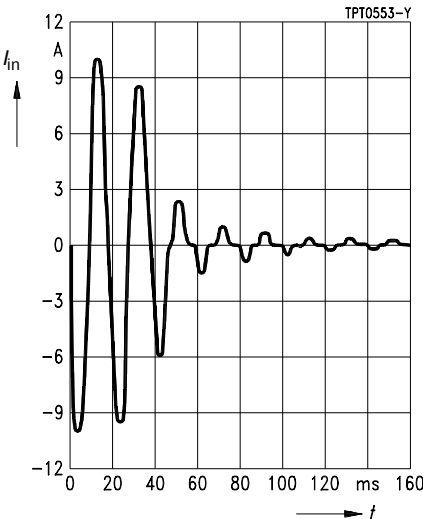

T 250

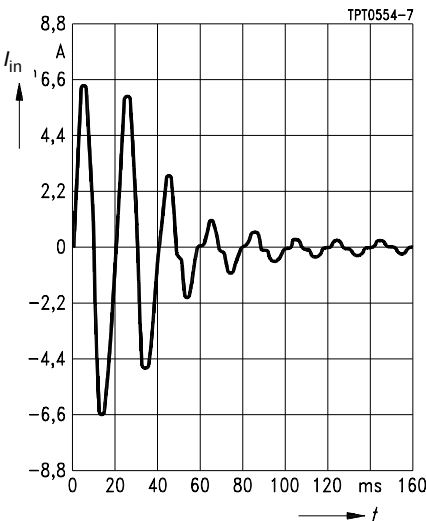


265 V

Applications

- Switching thermistor for lighting applications (e. g. in electronic ballasts for lamps etc.)
- For frequent switching

Features

- Coated thermistor disk, kinked leads
- Marked with manufacturer's logo and type designation
- Stable performance throughout 10 000 switching cycles



Dimensions (mm)

| Type   | $b_{\max}$ | $h_{\max}$ | $\varnothing d$ |
|--------|------------|------------|-----------------|
| C 1118 | 6,5        | 10,0       | 0,6             |
| C 1119 | 4,0        | 7,5        | 0,5             |

|                                                               |                 |            |                    |
|---------------------------------------------------------------|-----------------|------------|--------------------|
| Max. operating voltage ( $T_A = 60\text{ }^{\circ}\text{C}$ ) | $V_{\max}$      | 265        | V                  |
| Rated voltage                                                 | $V_N$           | 220        | V                  |
| Switching cycles (typ.)                                       | $N$             | 10000      |                    |
| Resistance tolerance                                          | $\Delta R_N$    | $\pm 25\%$ |                    |
| Operating temperature range ( $V = 0$ )                       | $T_{\text{op}}$ | $-25/+125$ | $^{\circ}\text{C}$ |
| ( $V = V_{\max}$ )                                            | $T_{\text{op}}$ | 0/60       | $^{\circ}\text{C}$ |

| Type | $I_N$ | $I_S$ | $I_{S\max}$<br>( $V = V_{\max}$ ) | $I_r$<br>( $V = V_{\max}$ ) | $R_N$    | $R_{\min}$ | $t_s$ | Ordering code |
|------|-------|-------|-----------------------------------|-----------------------------|----------|------------|-------|---------------|
|      | mA    | mA    | mA                                | mA                          | $\Omega$ | $\Omega$   | s     |               |

Reference temperature  $T_{\text{Ref}} = 80\text{ }^{\circ}\text{C}$


|        |    |    |     |   |     |    |            |                  |
|--------|----|----|-----|---|-----|----|------------|------------------|
| C 1118 | 30 | 70 | 400 | 4 | 70  | 39 | $\leq 6,0$ | B59118-C1080-A70 |
| C 1119 | 15 | 40 | 200 | 3 | 150 | 84 | $\leq 6,0$ | B59119-C1080-A70 |

Reference temperature  $T_{\text{Ref}} = 120\text{ }^{\circ}\text{C}$


|        |    |     |     |   |     |    |            |                  |
|--------|----|-----|-----|---|-----|----|------------|------------------|
| C 1118 | 55 | 110 | 400 | 6 | 70  | 39 | $\leq 8,0$ | B59118-C1120-A70 |
| C 1119 | 30 | 60  | 200 | 5 | 150 | 84 | $\leq 8,0$ | B59119-C1120-A70 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

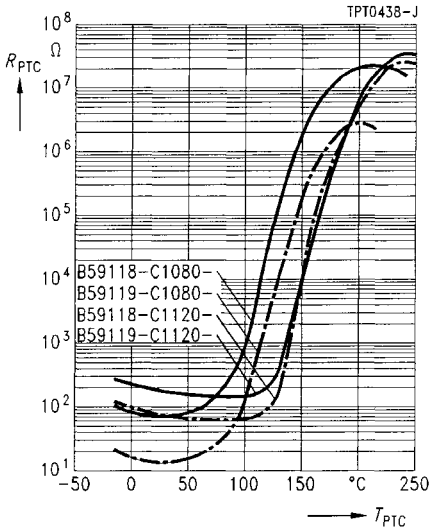


Switching time  $t_S$  versus switching current  $I_S$   
(measured at  $25^\circ\text{C}$  in still air)

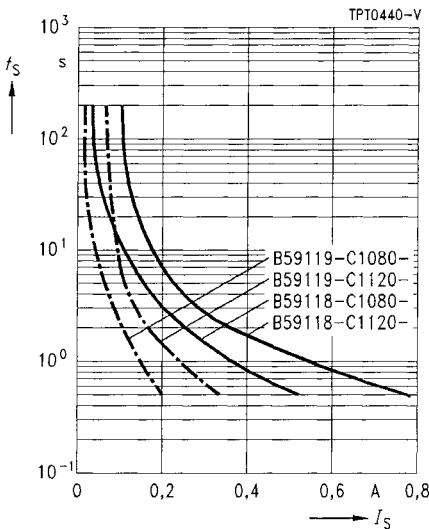

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at  $25^\circ\text{C}$  in still air)

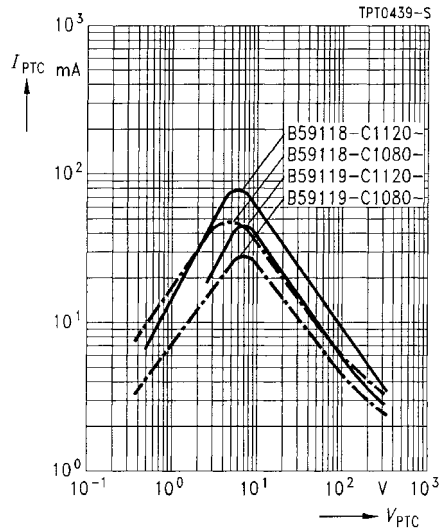

Rated current  $I_N$  versus ambient temperature  $T_A$   
(measured in still air)

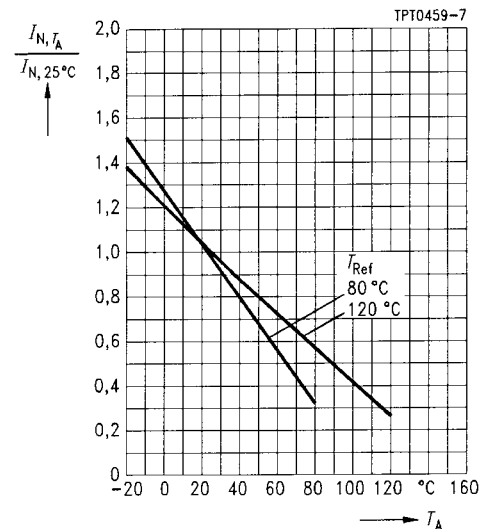


265 V

Applications

- Delayed switching of loads  
(e. g. in electronic ballasts for lamps)
- For frequent switching

Features

- Encased thermistor disk with clamp contacts
- Flame-retardant plastic case
- Case material UL-listed
- Silver-plated solder pins
- Manufacturer's logo and type designation stamped on in white
- Stable performance throughout  
100 000 switching cycles



Dimensions (mm)

|                                         |              |              |                    |
|-----------------------------------------|--------------|--------------|--------------------|
| Switching cycles (typ.)                 | $N$          | 100000       |                    |
| Switching time                          | $t_S$        | $\leq 5$     | s                  |
| Resistance tolerance                    | $\Delta R_N$ | $\pm 25 \%$  |                    |
| Operating temperature range ( $V = 0$ ) | $T_{op}$     | $- 25/+ 125$ | $^{\circ}\text{C}$ |
| ( $V = V_{max}$ )                       | $T_{op}$     | 0/60         | $^{\circ}\text{C}$ |

| Type                                           | $T_{Ref}$<br>$^{\circ}\text{C}$ | $I_N$<br>mA | $I_S$<br>mA | $I_{Smax}$<br>( $V=V_{max}$ )<br>A | $I_r$<br>( $V=V_{max}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{min}$<br>$\Omega$ | Ordering code   |
|------------------------------------------------|---------------------------------|-------------|-------------|------------------------------------|--------------------------------|-------------------|-----------------------|-----------------|
| $V_{max} = 265 \text{ V}, V_N = 220 \text{ V}$ |                                 |             |             |                                    |                                |                   |                       |                 |
| J 150                                          | 120                             | 35          | 70          | 0,45                               | 4                              | 150               | 84                    | B59150-J120-A20 |
| J 200                                          | 120                             | 30          | 60          | 0,42                               | 4                              | 200               | 110                   | B59200-J120-A20 |
| J 320                                          | 120                             | 24          | 50          | 0,33                               | 4                              | 320               | 200                   | B59320-J120-A20 |


80 V to 265 V

**Applications**

- Delayed switching of loads
- For frequent switching

**Features**

- Encased thermistor disk with clamp contacts
- Flame-retardant plastic case
- Case material UL-listed
- Silver-plated solder pins
- Manufacturer's logo and type designation stamped on in white
- Stable performance throughout 50 000 switching cycles




Dimensions (mm)

|                                         |              |              |                    |
|-----------------------------------------|--------------|--------------|--------------------|
| Switching cycles (typ.)                 | $N$          | 50000        |                    |
| Switching time                          | $t_S$        | $\leq 0,5$   | s                  |
| Resistance tolerance                    | $\Delta R_N$ | $\pm 25 \%$  |                    |
| Operating temperature range ( $V = 0$ ) | $T_{op}$     | $- 25/+ 125$ | $^{\circ}\text{C}$ |
| ( $V = V_{max}$ )                       | $T_{op}$     | 0/60         | $^{\circ}\text{C}$ |


| Type                                           | $T_{Ref}$<br>$^{\circ}\text{C}$ | $I_N$<br>mA | $I_S$<br>mA | $I_{Smax}$<br>( $V = V_{max}$ )<br>A | $I_r$<br>( $V = V_{max}$ )<br>mA | $R_N$<br>$\Omega$ | $R_{min}$<br>$\Omega$ | Ordering code    |
|------------------------------------------------|---------------------------------|-------------|-------------|--------------------------------------|----------------------------------|-------------------|-----------------------|------------------|
| $V_{max} = 80 \text{ V}, V_N = 63 \text{ V}$   |                                 |             |             |                                      |                                  |                   |                       |                  |
| J 280                                          | 120                             | 77          | 150         | 1,10                                 | 14                               | 32                | 20                    | B59339-A1320-P20 |
| J 281                                          | 120                             | 60          | 120         | 0,90                                 | 10                               | 50                | 31                    | B59339-A1500-P20 |
| $V_{max} = 160 \text{ V}, V_N = 110 \text{ V}$ |                                 |             |             |                                      |                                  |                   |                       |                  |
| J 282                                          | 120                             | 48          | 100         | 0,70                                 | 6,0                              | 80                | 50                    | B59339-A1800-P20 |
| J 283                                          | 120                             | 39          | 80          | 0,58                                 | 5,0                              | 120               | 75                    | B59339-A1121-P20 |
| $V_{max} = 265 \text{ V}, V_N = 220 \text{ V}$ |                                 |             |             |                                      |                                  |                   |                       |                  |
| J 284                                          | 120                             | 30          | 60          | 0,42                                 | 4,0                              | 200               | 110                   | B59339-A1201-P20 |
| J 285                                          | 120                             | 24          | 50          | 0,33                                 | 4,0                              | 320               | 200                   | B59339-A1321-P20 |
| J 286                                          | 120                             | 20          | 40          | 0,27                                 | 3,5                              | 500               | 260                   | B59339-A1501-P20 |
| J 287                                          | 120                             | 15          | 30          | 0,22                                 | 3,0                              | 800               | 480                   | B59339-A1801-P20 |
| J 288                                          | 120                             | 13          | 26          | 0,18                                 | 2,5                              | 1200              | 630                   | B59339-A1122-P20 |
| J 289                                          | 120                             | 10          | 20          | 0,15                                 | 2,0                              | 2000              | 900                   | B59339-A1202-P20 |
| J 290                                          | 115                             | 8           | 16          | 0,12                                 | 1,5                              | 3200              | 1500                  | B59339-A1322-P20 |

### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

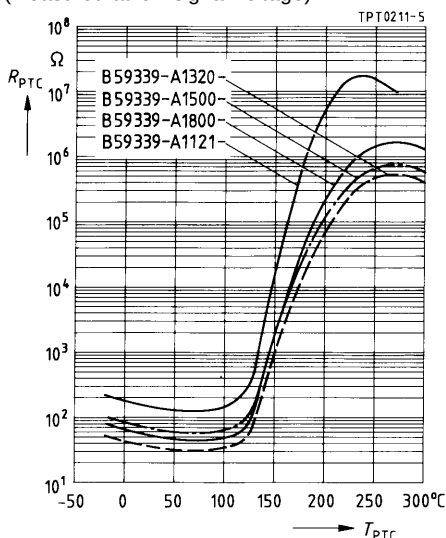

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

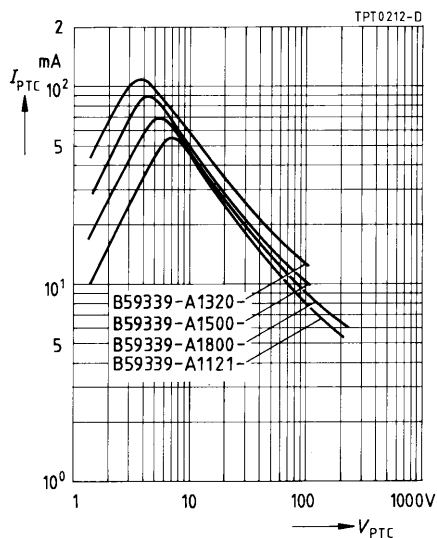


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

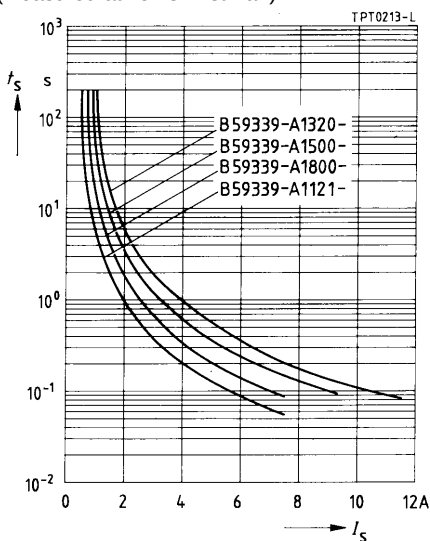


**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

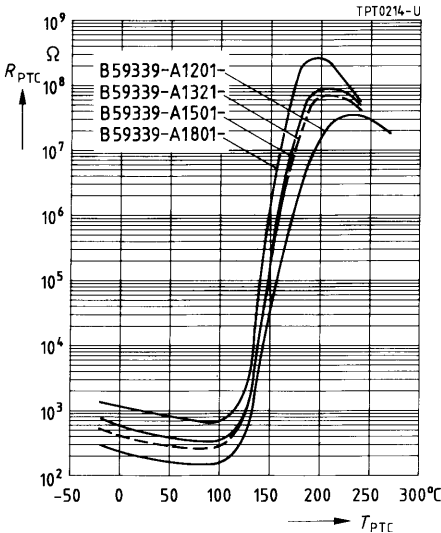

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

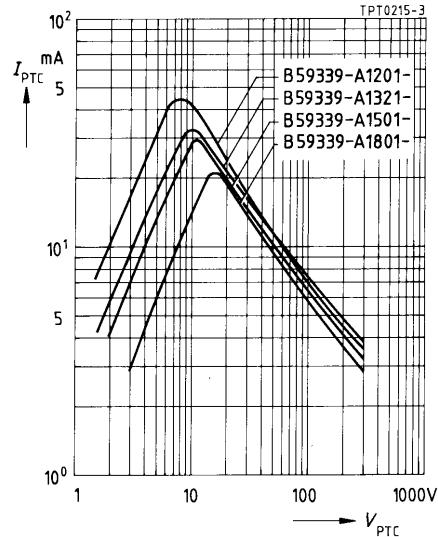


Switching time  $t_S$  versus switching current  $I_S$   
 (measured at 25 °C in still air)

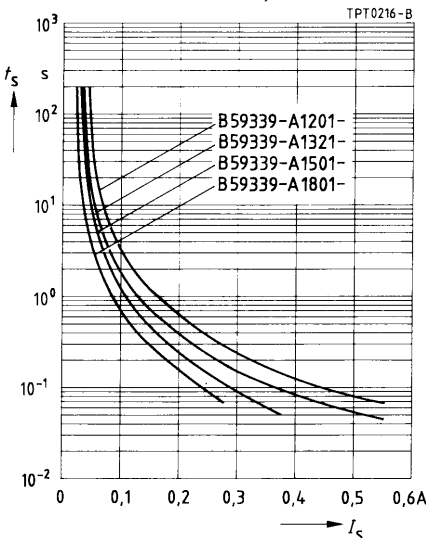




### Characteristics (typical)


PTC resistance  $R_{PTC}$  versus  
 PTC temperature  $T_{PTC}$   
 (measured at low signal voltage)

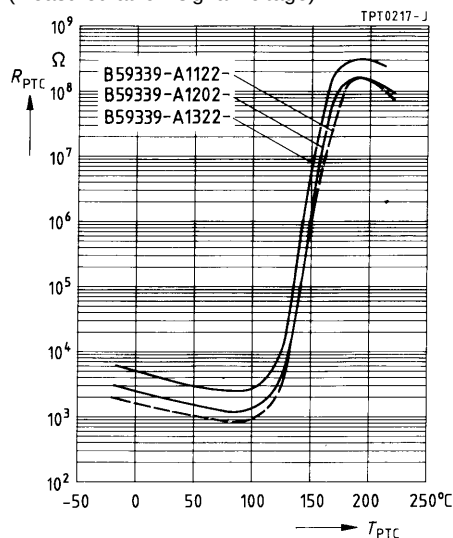

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
 (measured at 25 °C in still air)

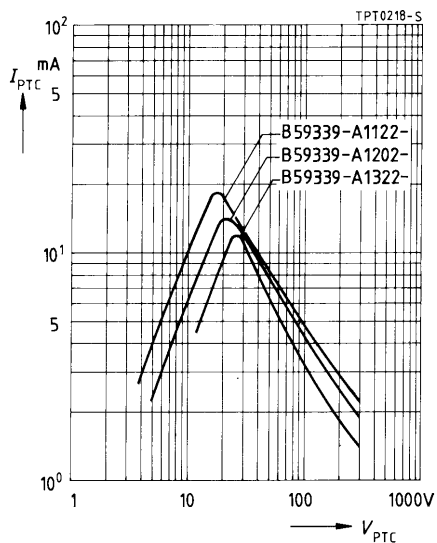

Switching time  $t_s$  versus switching current  $I_s$   
 (measured at 25 °C in still air)

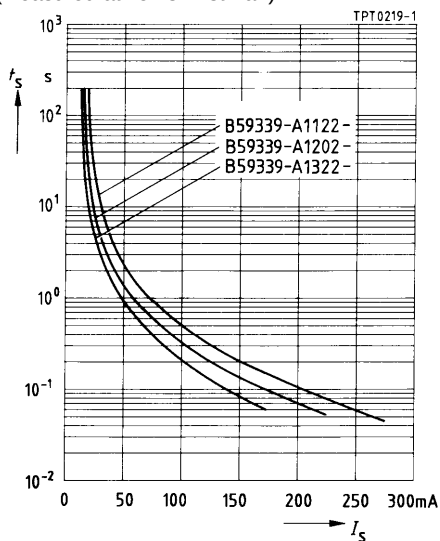


265 V

Applications

- Starting resistance in switch-mode power supplies

Features

- Encased thermistor disk with clamp contacts
- Flame-retardant plastic case
- Case material UL-listed
- Silver-plated solder pins
- Manufacturer's logo and type designation stamped on in white
- Stable performance throughout 50 000 switching cycles




Dimensions (mm)

|                                                 |                 |            |                    |
|-------------------------------------------------|-----------------|------------|--------------------|
| Max. operating voltage ( $T_A = 60\text{ °C}$ ) | $V_{\max}$      | 265        | V                  |
| Rated voltage                                   | $V_N$           | 220        | V                  |
| Switching cycles (typ.)                         | $N$             | 50000      |                    |
| Rated resistance                                | $R_N$           | 5000       | $\Omega$           |
| Resistance tolerance                            | $\Delta R_N$    | $\pm 25\%$ |                    |
| Operating temperature range ( $V = 0$ )         | $T_{\text{op}}$ | $-25/+125$ | $^{\circ}\text{C}$ |
| ( $V = V_{\max}$ )                              | $T_{\text{op}}$ | 0/60       | $^{\circ}\text{C}$ |


| Type | $T_{\text{Ref}}$<br>$^{\circ}\text{C}$ | $I_N$<br>mA | $I_S$<br>mA | $I_{S\max}$<br>( $V = V_{\max}$ )<br>A | $t_S$<br>s | $I_r$<br>( $V = V_{\max}$ )<br>mA | $R_{\min}$<br>$\Omega$ | Ordering code    |
|------|----------------------------------------|-------------|-------------|----------------------------------------|------------|-----------------------------------|------------------------|------------------|
| J 29 | 115                                    | 7           | 15          | 0,1                                    | $\leq 0,5$ | 1,5                               | 1500                   | B59339-A1502-P20 |
| J 29 | 150                                    | 10          | 20          | 0,1                                    | $\leq 1,0$ | 1,8                               | 2200                   | B59342-A1502-P20 |
| J 29 | 190                                    | 14          | 30          | 0,1                                    | $\leq 2,0$ | 2,0                               | 2200                   | B59346-A1502-P20 |

**Characteristics (typical)**


PTC resistance  $R_{PTC}$  versus  
PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

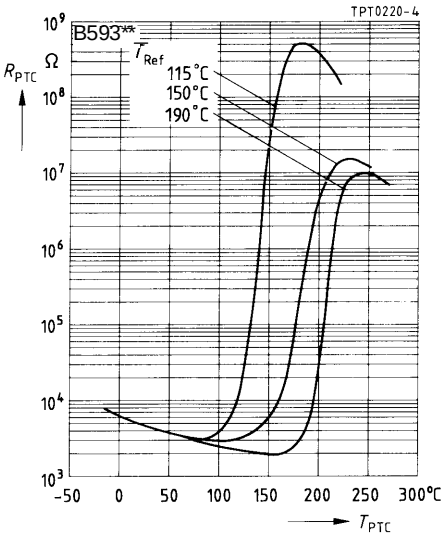

PTC current  $I_{PTC}$  versus PTC voltage  $V_{PTC}$   
(measured at  $25^\circ\text{C}$  in still air)

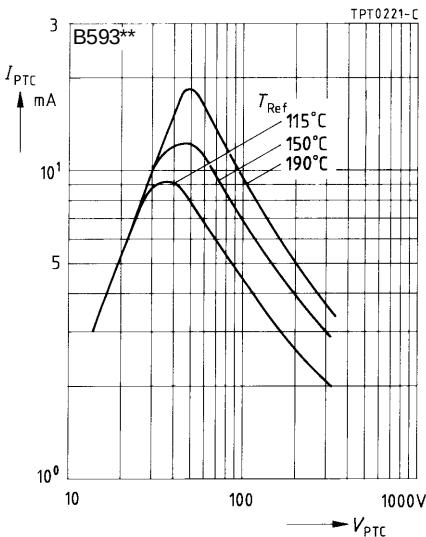

Switching time  $t_S$  versus switching current  $I_S$   
(measured at  $25^\circ\text{C}$  in still air)

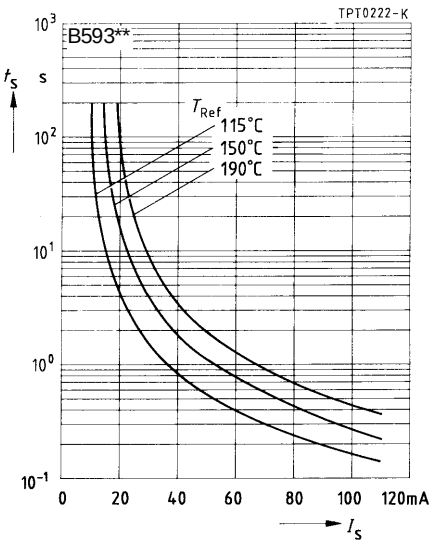

## 175 V to 400 V

### Applications

- Time delay
- Motor starting
- Time delay in turning off the auxiliary winding of single-phase ac motors


### Features

- Two versions available
- Version A:  
Uncoated, metallized disk for clamp-contacting  
UL approval for all types with the exception of A 196
- Version J:  
Thermistor disk encapsulated in heat-resistant, flame-retardant plastic case  
with connections for compressor power supplies and tab connectors;  
other cases and other terminal options upon request


|                                         |          |          |    |
|-----------------------------------------|----------|----------|----|
| Switching cycles                        | $N$      | > 100000 |    |
| Operating temperature range ( $V = 0$ ) | $T_{op}$ | 5/80     | °C |
| ( $V = V_{max}$ )                       | $T_{op}$ | 5/80     | °C |

| Type  | $V_{max}$ | $I_{max}$ | $T_{Ref}$ | $V_D$ | $R_N \pm \Delta R$<br>( $V_{PTC} \leq 2,5 \text{ V}$ )<br>$\Omega$ | $I_r$ |
|-------|-----------|-----------|-----------|-------|--------------------------------------------------------------------|-------|
|       | V         | A         | °C        | V     |                                                                    | mA    |
| A 192 | 325       | 8         | 120       | > 650 | 25 + 20/– 20 %                                                     | 12    |
| A 196 | 350       | 8         | 120       | > 700 | 15 +/– 30 %                                                        | 12    |
| A 501 | 355       | 6         | 135       | 700   | 33 ± 30 %                                                          | 9     |
| A 502 | 400       | 4         | 120       | 750   | 47 ± 20 %                                                          | 9     |
| J 501 | 355       | 6         | 135       | 700   | 33 ± 30 %                                                          | 9     |
| J 502 | 400       | 4         | 120       | 750   | 47 ± 20 %                                                          | 9     |

Version A



Version J

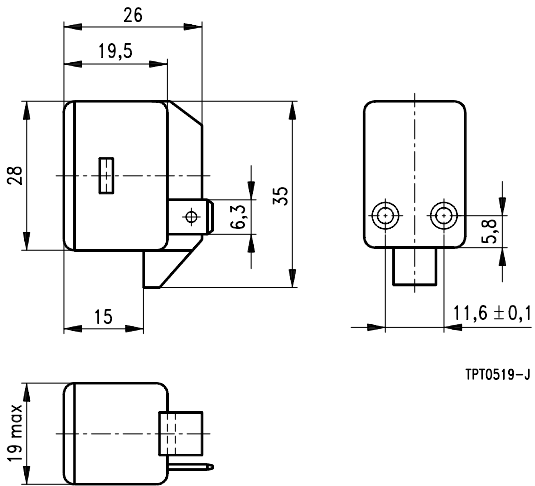

Dimensions (mm)

| Type  | <i>b</i>         | <i>s</i>  |
|-------|------------------|-----------|
| A 192 | 20,5 + 0,5/– 1,0 | 2,5 ± 0,2 |
| A 196 | 20,5 + 0,5/– 1,0 | 3,2 ± 0,2 |
| A 501 | 19,5             | 2,5 ± 0,2 |
| A 502 | 19,5             | 2,5 ± 0,2 |

| Type  | <i>T</i> <sub>surf</sub><br>°C | <i>t</i> <sub>S</sub><br>s | Ordering code    |
|-------|--------------------------------|----------------------------|------------------|
| A 192 | 175                            | 0,6                        | B59192-A120-A10  |
| A 196 | 175                            | 0,9                        | B59196-A120-A10  |
| A 501 | 180                            | 0,8                        | B59501-A135-A10  |
| A 502 | 170                            | 0,7                        | B59502-A120-A10  |
| J 501 | –                              | 0,8                        | B59501-J135-A110 |
| J 502 | –                              | 0,7                        | B59502-J120-A110 |

### Applications


- Thermal protection of winding in electric motors
- Limit temperature monitoring

### Features

- Thermistor pellet with insulating encapsulation
- Low-resistance type
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color
- Extremely fast response due to small dimensions
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 081
- Can be used in conjunction with Siemens tripping units

|                             |                                                            |                      |            |                    |
|-----------------------------|------------------------------------------------------------|----------------------|------------|--------------------|
| Max. operating voltage      | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$           | 30         | V                  |
| Max. measuring voltage      | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$ | 7,5        | V                  |
| Rated resistance            | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                | $\leq 100$ | $\Omega$           |
| Insulation test voltage     |                                                            | $V_{\text{is}}$      | 2,5        | kV ac              |
| Response time               |                                                            | $t_a$                | < 3        | s                  |
| Operating temperature range | $(V = 0)$                                                  | $T_{\text{op}}$      | - 25/+ 180 | $^{\circ}\text{C}$ |
|                             | $(V = V_{\max})$                                           | $T_{\text{op}}$      | 0/40       | $^{\circ}\text{C}$ |

| Type   | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|--------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 1100 | $60 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 1100 | $70 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 1100 | $80 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | —                                                                                       |
| M 1100 | $90 \pm 5$                                          | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $100 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $110 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $120 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $130 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $140 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $145 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $150 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $155 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $160 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 1100 | $170 \pm 7$                                         | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 1100 | $180 \pm 7$                                         | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 1100 | $190 \pm 7$                                         | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |


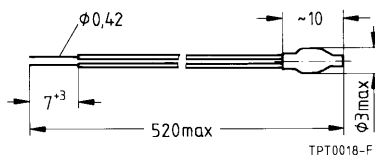


Dimensions in mm



| Type   | Color coding of litz wires | Ordering code    |
|--------|----------------------------|------------------|
| M 1100 | white/grey                 | B59100-M1060-A70 |
| M 1100 | white/brown                | B59100-M1070-A70 |
| M 1100 | white/white                | B59100-M1080-A70 |
| M 1100 | green/green                | B59100-M1090-A70 |
| M 1100 | red/red                    | B59100-M1100-A70 |
| M 1100 | brown/brown                | B59100-M1110-A70 |
| M 1100 | grey/grey                  | B59100-M1120-A70 |
| M 1100 | blue/blue                  | B59100-M1130-A70 |
| M 1100 | white/blue                 | B59100-M1140-A70 |
| M 1100 | white/black                | B59100-M1145-A70 |
| M 1100 | black/black                | B59100-M1150-A70 |
| M 1100 | blue/black                 | B59100-M1155-A70 |
| M 1100 | blue/red                   | B59100-M1160-A70 |
| M 1100 | white/green                | B59100-M1170-A70 |
| M 1100 | white/red                  | B59100-M1180-A70 |
| M 1100 | black/grey                 | B59100-M1190-A70 |

**Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

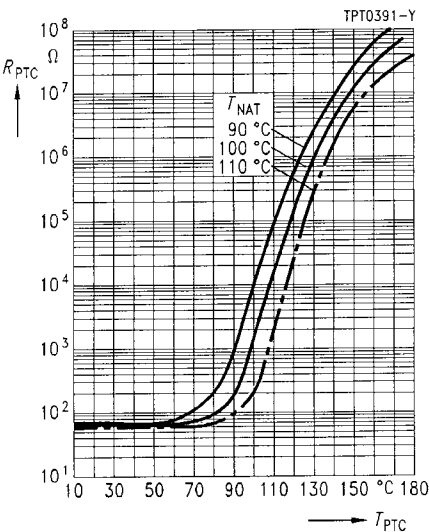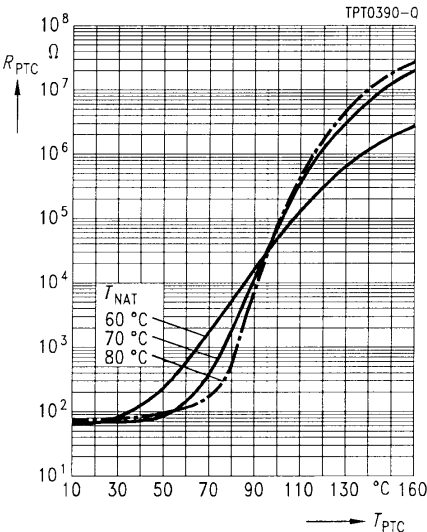


PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

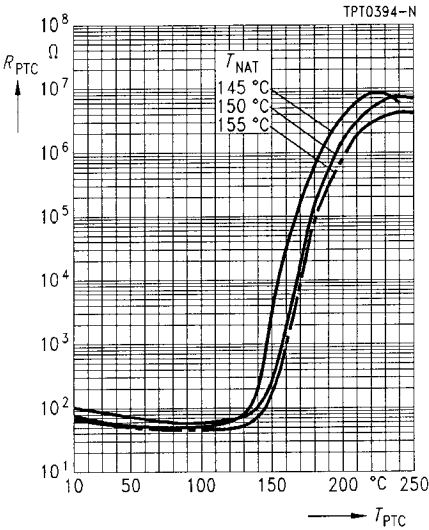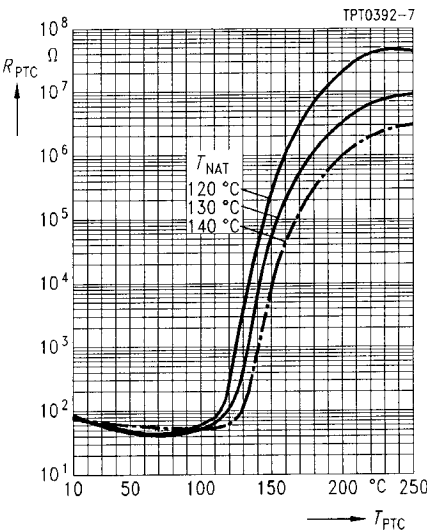



### Characteristics (typical)

PTC resistance  $R_{\text{PTC}}$  versus PTC temperature  $T_{\text{PTC}}$   
(measured at low signal voltage)

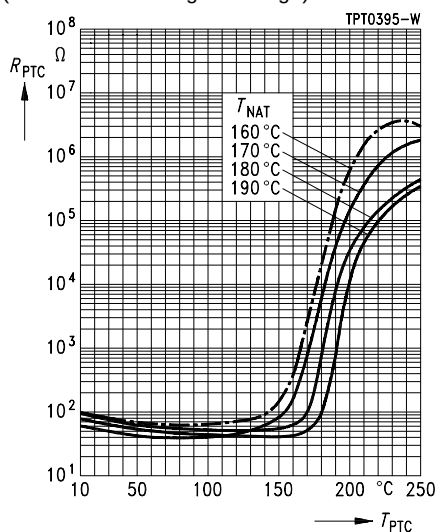

### Applications


- Thermal protection of winding in electric motors
- Limit temperature monitoring

### Features

- Thermistor pellets with insulating encapsulation in series connection (triple sensor)
- Low-resistance type
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color,  
connecting wires all yellow
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 082
- Can be used in conjunction with Siemens tripping units

|                             |                                                            |                                    |                    |                                          |
|-----------------------------|------------------------------------------------------------|------------------------------------|--------------------|------------------------------------------|
| Max. operating voltage      | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$                         | 30                 | V                                        |
| Max. measuring voltage      | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$               | 7,5                | V                                        |
| Rated resistance            | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                              | $\leq 300$         | $\Omega$                                 |
| Insulation test voltage     |                                                            | $V_{\text{is}}$                    | 2,5                | kV ac                                    |
| Response time               |                                                            | $t_a$                              | < 3                | s                                        |
| Operating temperature range | $(V = 0)$<br>$(V = V_{\max})$                              | $T_{\text{op}}$<br>$T_{\text{op}}$ | $-25/+180$<br>0/40 | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$ |

| Type   | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|--------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 1300 | $60 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 1300 | $70 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 1300 | $80 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 1300 | $90 \pm 5$                                          | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $100 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $110 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $120 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $130 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $140 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $145 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $150 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $155 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $160 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 1300 | $170 \pm 7$                                         | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 1300 | $180 \pm 7$                                         | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 1300 | $190 \pm 7$                                         | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |





Dimensions in mm



| Type   | Color coding<br>of litz wires | Ordering code    |
|--------|-------------------------------|------------------|
| M 1300 | white/grey                    | B59300-M1060-A70 |
| M 1300 | white/brown                   | B59300-M1070-A70 |
| M 1300 | white/white                   | B59300-M1080-A70 |
| M 1300 | green/green                   | B59300-M1090-A70 |
| M 1300 | red/red                       | B59300-M1100-A70 |
| M 1300 | brown/brown                   | B59300-M1110-A70 |
| M 1300 | grey/grey                     | B59300-M1120-A70 |
| M 1300 | blue/blue                     | B59300-M1130-A70 |
| M 1300 | white/blue                    | B59300-M1140-A70 |
| M 1300 | white/black                   | B59300-M1145-A70 |
| M 1300 | black/black                   | B59300-M1150-A70 |
| M 1300 | blue/black                    | B59300-M1155-A70 |
| M 1300 | blue/red                      | B59300-M1160-A70 |
| M 1300 | white/green                   | B59300-M1170-A70 |
| M 1300 | white/red                     | B59300-M1180-A70 |
| M 1300 | black/grey                    | B59300-M1190-A70 |

**Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

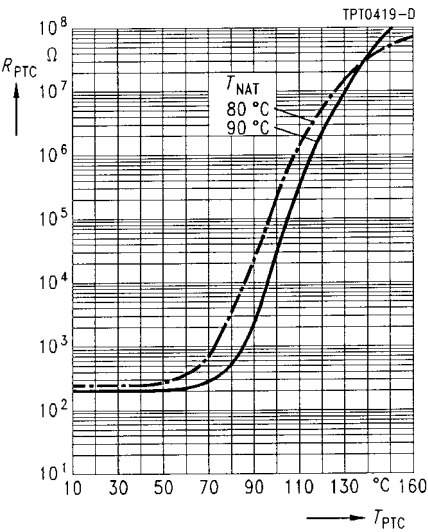
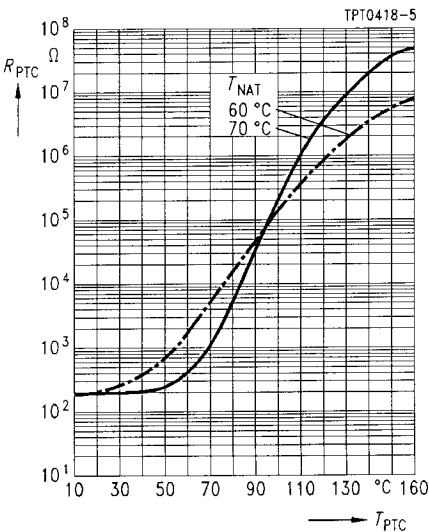


PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

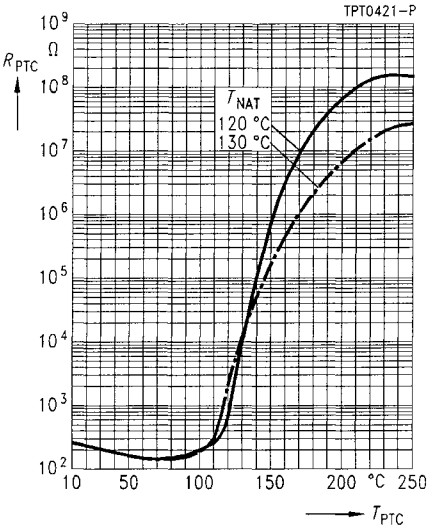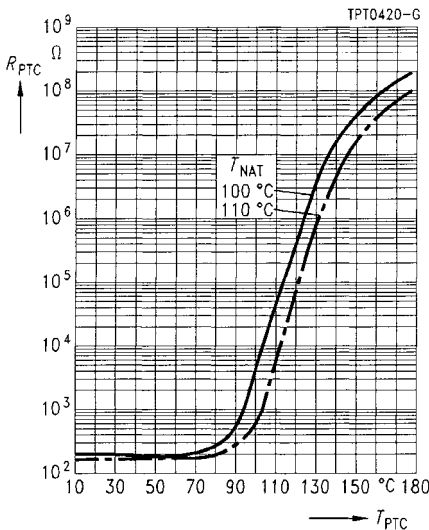


# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

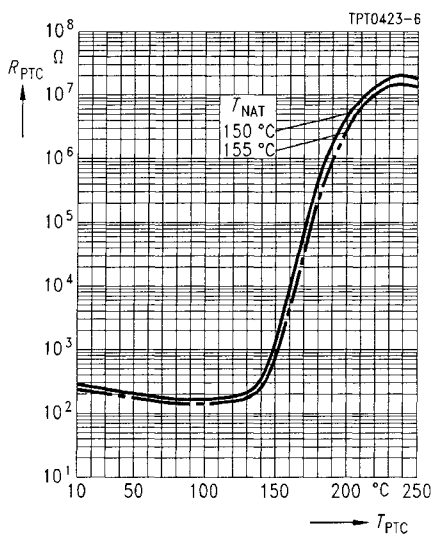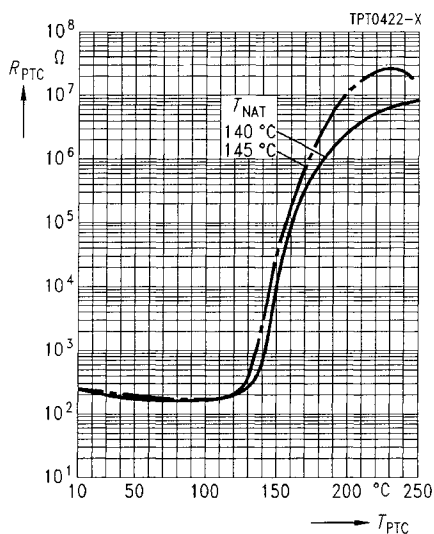

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

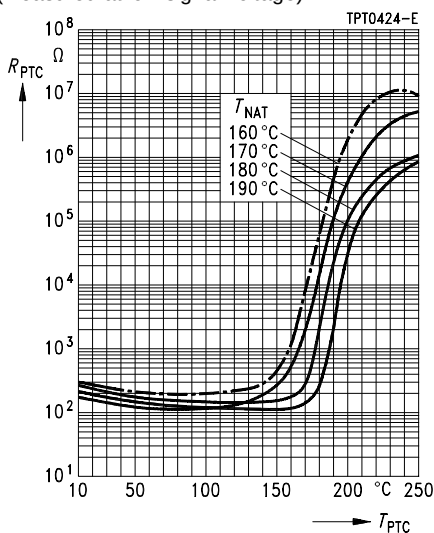

### Applications


- Thermal protection of winding in electric motors
- Limit temperature monitoring

### Features

- Thermistor pellet with insulating encapsulation
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color
- Extremely fast response due to small dimensions
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 081
- Can be used in conjunction with Siemens tripping units

|                                         |                                                            |                      |            |                    |
|-----------------------------------------|------------------------------------------------------------|----------------------|------------|--------------------|
| Max. operating voltage                  | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$           | 30         | V                  |
| Max. measuring voltage                  | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$ | 7,5        | V                  |
| Rated resistance                        | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                | $\leq 250$ | $\Omega$           |
| Insulation test voltage                 |                                                            | $V_{\text{is}}$      | 2,5        | kV ac              |
| Response time                           |                                                            | $t_a$                | $< 3$      | s                  |
| Operating temperature range ( $V = 0$ ) |                                                            | $T_{\text{op}}$      | $-25/+180$ | $^{\circ}\text{C}$ |
|                                         | $(V = V_{\max})$                                           | $T_{\text{op}}$      | 0/40       | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|-------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 135 | $60 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 4 \text{ k}$                                                                      |
| M 135 | $70 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 4 \text{ k}$                                                                      |
| M 135 | $80 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 4 \text{ k}$                                                                      |
| M 135 | $90 \pm 5$                                          | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $100 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $110 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $120 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $130 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $140 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $145 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $150 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $155 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $160 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 135 | $170 \pm 7$                                         | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 4 \text{ k}$                                                                      |
| M 135 | $180 \pm 7$                                         | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 4 \text{ k}$                                                                      |


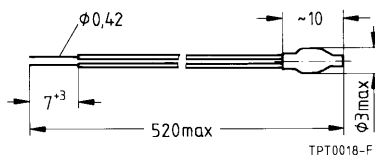


Dimensions in mm



| Type  | Color coding of litz wires | Ordering code   |
|-------|----------------------------|-----------------|
| M 135 | white/grey                 | B59135-M60-A70  |
| M 135 | white/brown                | B59135-M70-A70  |
| M 135 | white/white                | B59135-M80-A70  |
| M 135 | green/green                | B59135-M90-A70  |
| M 135 | red/red                    | B59135-M100-A70 |
| M 135 | brown/brown                | B59135-M110-A70 |
| M 135 | grey/grey                  | B59135-M120-A70 |
| M 135 | blue/blue                  | B59135-M130-A70 |
| M 135 | white/blue                 | B59135-M140-A70 |
| M 135 | white/black                | B59135-M145-A70 |
| M 135 | black/black                | B59135-M150-A70 |
| M 135 | blue/black                 | B59135-M155-A70 |
| M 135 | blue/red                   | B59135-M160-A70 |
| M 135 | white/green                | B59135-M170-A70 |
| M 135 | white/red                  | B59135-M180-A70 |

**Characteristics (typical)**

PTC resistance  $R_{\text{PTC}}$  versus PTC temperature  $T_{\text{PTC}}$   
(measured at low signal voltage)

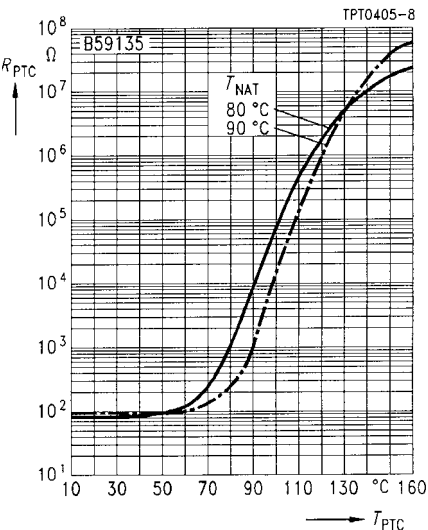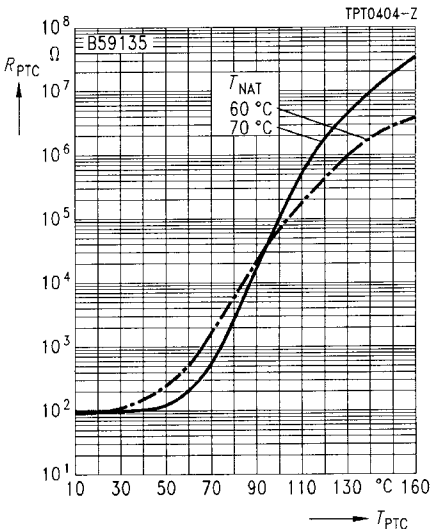



PTC resistance  $R_{\text{PTC}}$  versus PTC temperature  $T_{\text{PTC}}$   
(measured at low signal voltage)

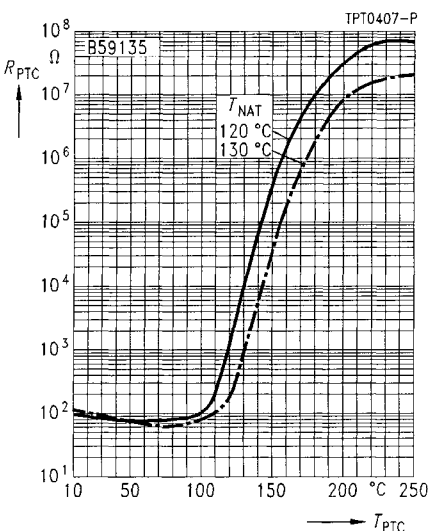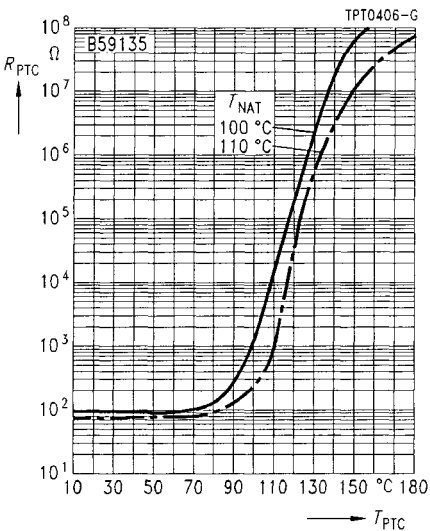




### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

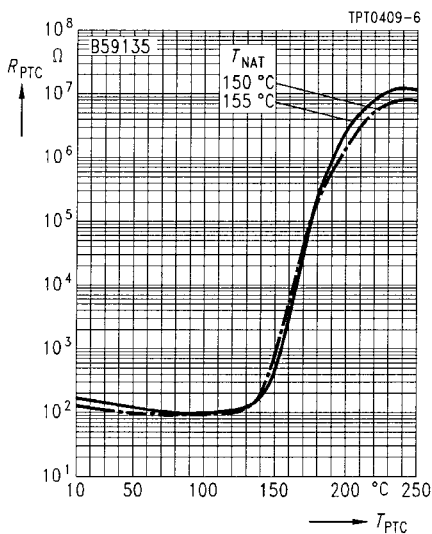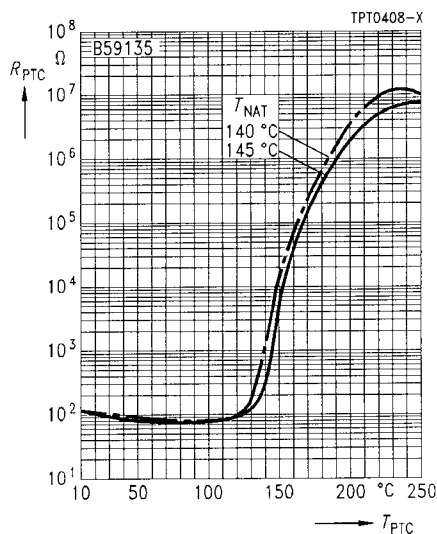

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

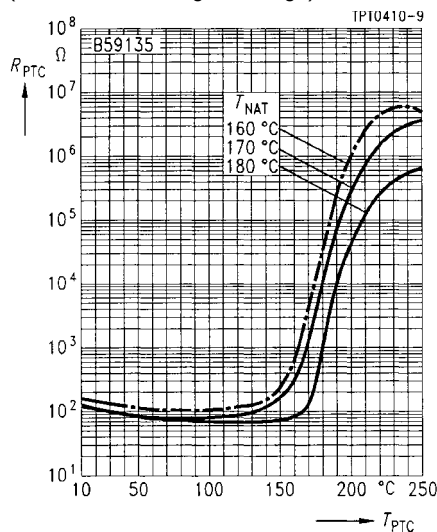

### Applications


- Thermal protection of winding in electric motors

### Features

- Thermistor pellets with insulating encapsulation in series connection (triple sensor)
- Low-resistance type
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color, connecting wires all yellow
- Extremely fast response due to small dimensions
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 082
- Can be used in conjunction with Siemens tripping units

|                                         |                                                            |                      |            |                    |
|-----------------------------------------|------------------------------------------------------------|----------------------|------------|--------------------|
| Max. operating voltage                  | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$           | 30         | V                  |
| Max. measuring voltage                  | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$ | 7,5        | V                  |
| Rated resistance                        | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                | $\leq 750$ | $\Omega$           |
| Insulation test voltage                 |                                                            | $V_{\text{is}}$      | 2,5        | kV ac              |
| Response time                           |                                                            | $t_a$                | $< 3$      | s                  |
| Operating temperature range ( $V = 0$ ) |                                                            | $T_{\text{op}}$      | $-25/+180$ | $^{\circ}\text{C}$ |
|                                         | $(V = V_{\max})$                                           | $T_{\text{op}}$      | 0/40       | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|-------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 335 | $60 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 12 \text{ k}$                                                                     |
| M 335 | $70 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 12 \text{ k}$                                                                     |
| M 335 | $80 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 12 \text{ k}$                                                                     |
| M 335 | $90 \pm 5$                                          | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $100 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $110 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $120 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $130 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $140 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $145 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $150 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $155 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $160 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 335 | $170 \pm 7$                                         | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 12 \text{ k}$                                                                     |
| M 335 | $180 \pm 7$                                         | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 12 \text{ k}$                                                                     |





Dimensions in mm



| Type  | Color coding of litz wires | Ordering code   |
|-------|----------------------------|-----------------|
| M 335 | white/grey                 | B59335-M60-A70  |
| M 335 | white/brown                | B59335-M70-A70  |
| M 335 | white/white                | B59335-M80-A70  |
| M 335 | green/green                | B59335-M90-A70  |
| M 335 | red/red                    | B59335-M100-A70 |
| M 335 | brown/brown                | B59335-M110-A70 |
| M 335 | grey/grey                  | B59335-M120-A70 |
| M 335 | blue/blue                  | B59335-M130-A70 |
| M 335 | white/blue                 | B59335-M140-A70 |
| M 335 | white/black                | B59335-M145-A70 |
| M 335 | black/black                | B59335-M150-A70 |
| M 335 | blue/black                 | B59335-M155-A70 |
| M 335 | blue/red                   | B59335-M160-A70 |
| M 335 | white/green                | B59335-M170-A70 |
| M 335 | white/red                  | B59335-M180-A70 |

**Characteristics (typical)**

PTC resistance  $R_{\text{PTC}}$  versus PTC temperature  $T_{\text{PTC}}$   
(measured at low signal voltage)

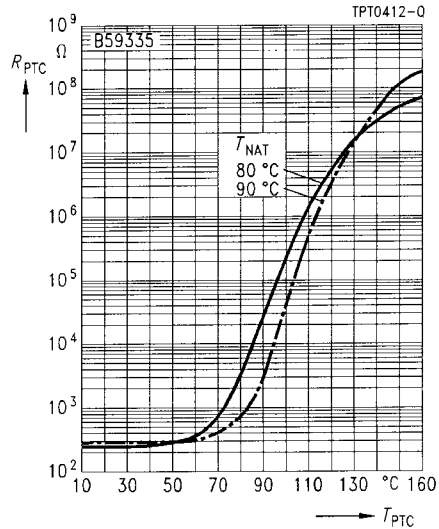
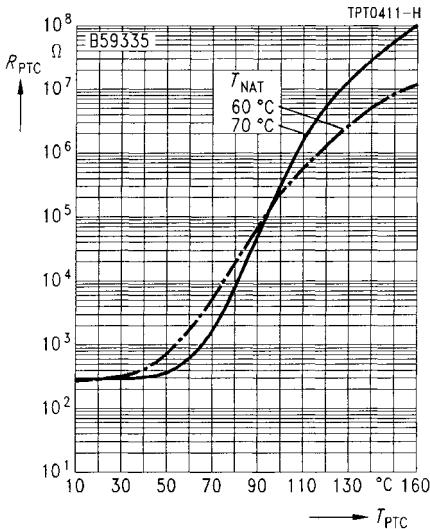


PTC resistance  $R_{\text{PTC}}$  versus PTC temperature  $T_{\text{PTC}}$   
(measured at low signal voltage)

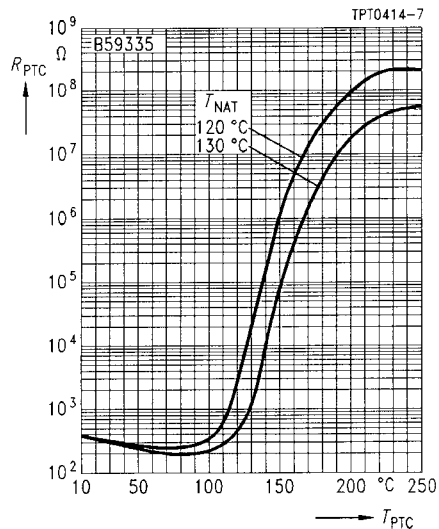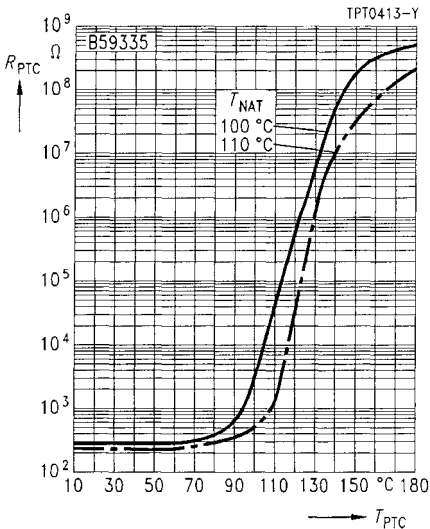


### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

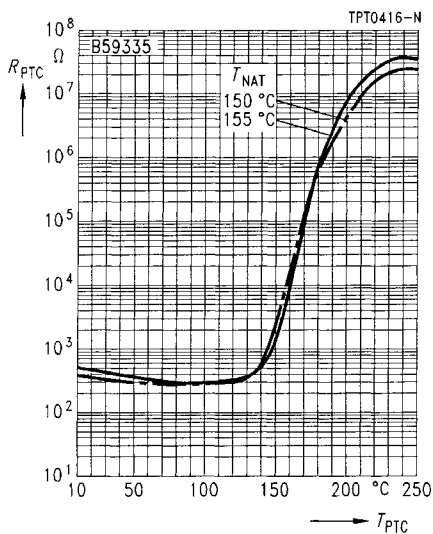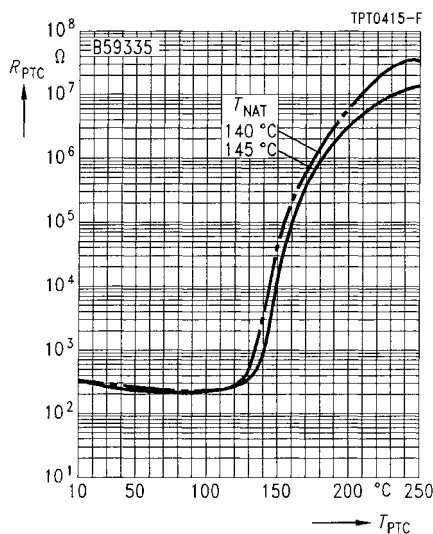

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

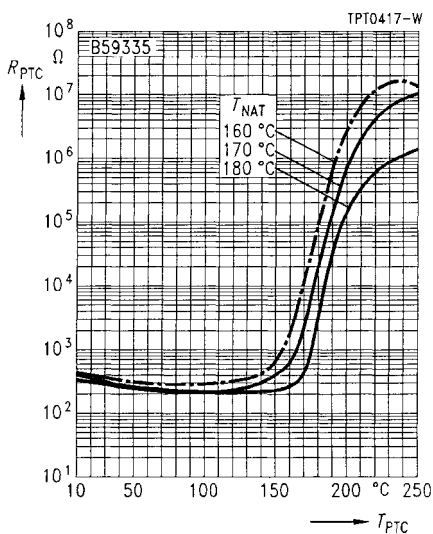

### Applications


- Thermal protection of winding in electric motors

### Features

- Thermistor pellet with insulating encapsulation
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 081
- Can be used in conjunction with Siemens tripping units

|                                       |                                                            |                      |              |                    |
|---------------------------------------|------------------------------------------------------------|----------------------|--------------|--------------------|
| Max. operating voltage                | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$           | 30           | V                  |
| Max. measuring voltage                | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$ | 7,5          | V                  |
| Rated resistance                      | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                | $\leq 100$   | $\Omega$           |
| Insulation test voltage               |                                                            | $V_{\text{is}}$      | 2,5          | kV ac              |
| Response time                         |                                                            | $t_a$                | $< 5$        | s                  |
| Operating temperature range $(V = 0)$ |                                                            | $T_{\text{op}}$      | $- 25/+ 180$ | $^{\circ}\text{C}$ |
|                                       | $(V = V_{\max})$                                           | $T_{\text{op}}$      | 0/40         | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|-------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 155 | $60 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 155 | $70 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 155 | $80 \pm 5$                                          | $\leq 570$                                                                          | $\geq 570$                                                                          | —                                                                                       | $\geq 10 \text{ k}$                                                                     |
| M 155 | $90 \pm 5$                                          | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $100 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $110 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $120 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $130 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $140 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $145 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $150 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $155 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $160 \pm 5$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $170 \pm 6$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |
| M 155 | $180 \pm 6$                                         | $\leq 550$                                                                          | $\geq 1330$                                                                         | $\geq 4 \text{ k}$                                                                      | —                                                                                       |


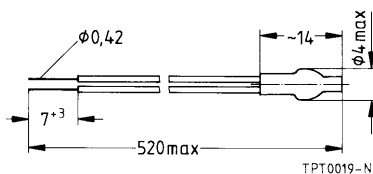


Dimensions in mm



| Type  | Color coding of litz wires | Ordering code   |
|-------|----------------------------|-----------------|
| M 155 | white/grey                 | B59155-M60-A70  |
| M 155 | white/brown                | B59155-M70-A70  |
| M 155 | white/white                | B59155-M80-A70  |
| M 155 | green/green                | B59155-M90-A70  |
| M 155 | red/red                    | B59155-M100-A70 |
| M 155 | brown/brown                | B59155-M110-A70 |
| M 155 | grey/grey                  | B59155-M120-A70 |
| M 155 | blue/blue                  | B59155-M130-A70 |
| M 155 | white/blue                 | B59155-M140-A70 |
| M 155 | white/black                | B59155-M145-A70 |
| M 155 | black/black                | B59155-M150-A70 |
| M 155 | blue/black                 | B59155-M155-A70 |
| M 155 | blue/red                   | B59155-M160-A70 |
| M 155 | white/green                | B59155-M170-A70 |
| M 155 | white/red                  | B59155-M180-A70 |

**Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

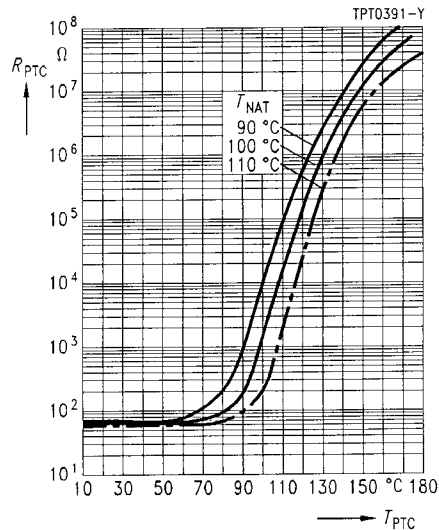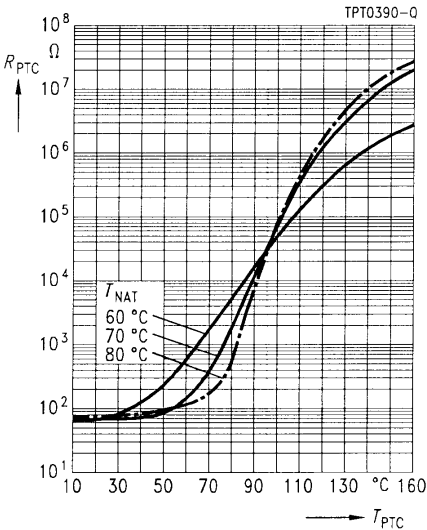


PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

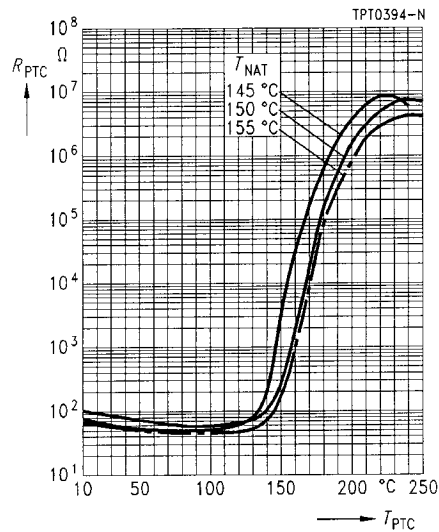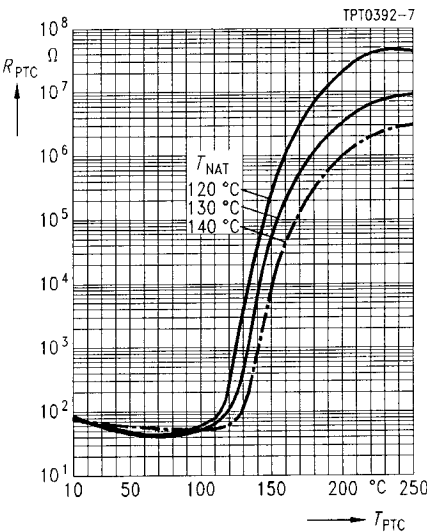



### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

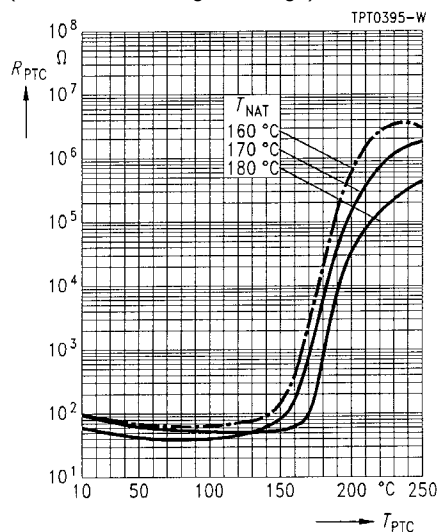

### Applications


- Thermal protection of winding in electric motors

### Features

- Thermistor pellets with insulating encapsulation in series connection (triple sensor)
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color,  
connecting wires all in black
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 082
- Can be used in conjunction with Siemens tripping units 3UN6 to 3UN9

|                                       |                                                            |                      |              |                    |
|---------------------------------------|------------------------------------------------------------|----------------------|--------------|--------------------|
| Max. operating voltage                | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$           | 30           | V                  |
| Max. measuring voltage                | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Mes,max}}$ | 7,5          | V                  |
| Rated resistance                      | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                | $\leq 300$   | $\Omega$           |
| Insulation test voltage               |                                                            | $V_{\text{IS}}$      | 2,5          | kV ac              |
| Response time                         |                                                            | $t_a$                | $< 5$        | s                  |
| Operating temperature range $(V = 0)$ |                                                            | $T_{\text{op}}$      | $- 25/+ 180$ | $^{\circ}\text{C}$ |
|                                       | $(V = V_{\max})$                                           | $T_{\text{op}}$      | 0/40         | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R(T_{\text{NAT}} - \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + \Delta T)$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 15 \text{ K})$<br>$(V_{\text{PTC}} \leq 7,5 \text{ V})$<br>$\Omega$ | $R(T_{\text{NAT}} + 23 \text{ K})$<br>$(V_{\text{PTC}} \leq 2,5 \text{ V})$<br>$\Omega$ |
|-------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| M 355 | $60 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 355 | $70 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 355 | $80 \pm 5$                                          | $\leq 1710$                                                                         | $\geq 1710$                                                                         | —                                                                                       | $\geq 30 \text{ k}$                                                                     |
| M 355 | $90 \pm 5$                                          | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $100 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $110 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $120 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $130 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $140 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $145 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $150 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $155 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $160 \pm 5$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $170 \pm 6$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |
| M 355 | $180 \pm 6$                                         | $\leq 1650$                                                                         | $\geq 3990$                                                                         | $\geq 12 \text{ k}$                                                                     | —                                                                                       |





Dimensions in mm



| Type  | Color coding of litz wires | Ordering code   |
|-------|----------------------------|-----------------|
| M 355 | white/grey                 | B59355-M60-A70  |
| M 355 | white/brown                | B59355-M70-A70  |
| M 355 | white/white                | B59355-M80-A70  |
| M 355 | green/green                | B59355-M90-A70  |
| M 355 | red/red                    | B59355-M100-A70 |
| M 355 | brown/brown                | B59355-M110-A70 |
| M 355 | grey/grey                  | B59355-M120-A70 |
| M 355 | blue/blue                  | B59355-M130-A70 |
| M 355 | white/blue                 | B59355-M140-A70 |
| M 355 | white/black                | B59355-M145-A70 |
| M 355 | black/black                | B59355-M150-A70 |
| M 355 | blue/black                 | B59355-M155-A70 |
| M 355 | blue/red                   | B59355-M160-A70 |
| M 355 | white/green                | B59355-M170-A70 |
| M 355 | white/red                  | B59355-M180-A70 |

**Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

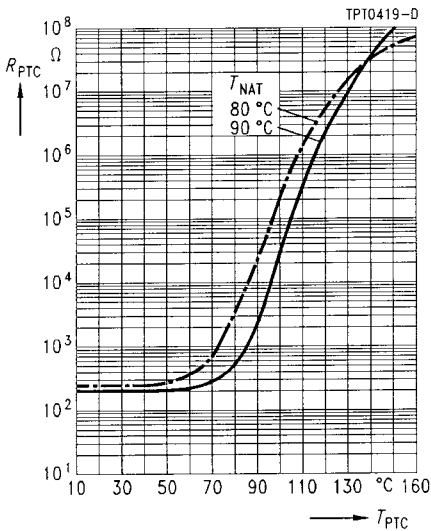
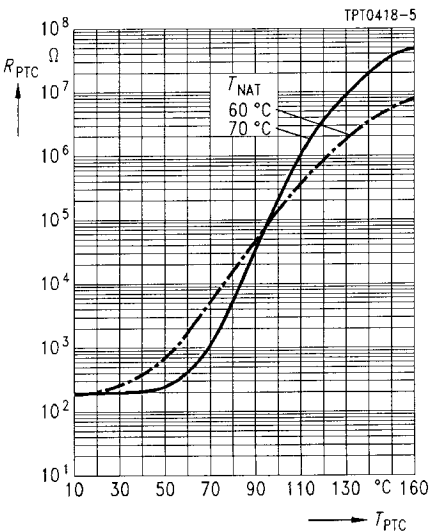


PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

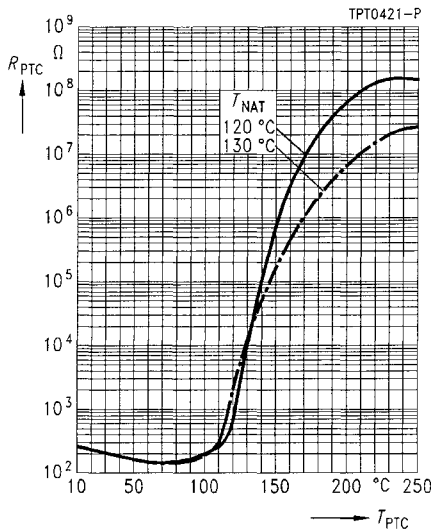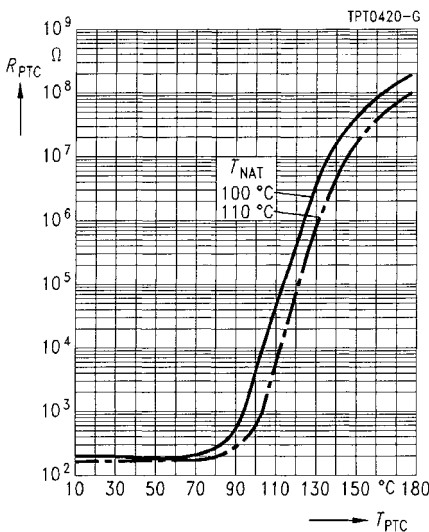


# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

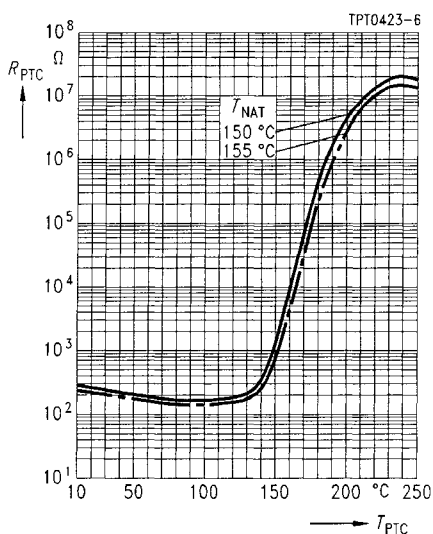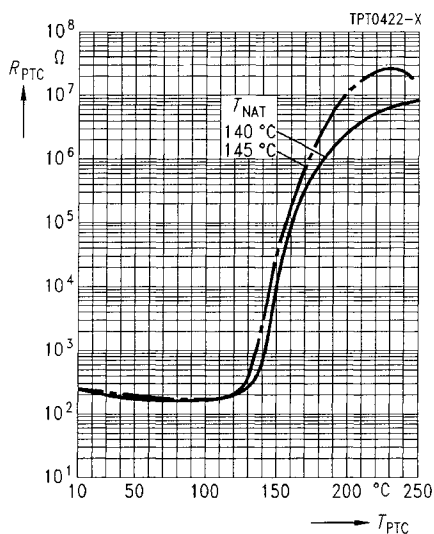

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

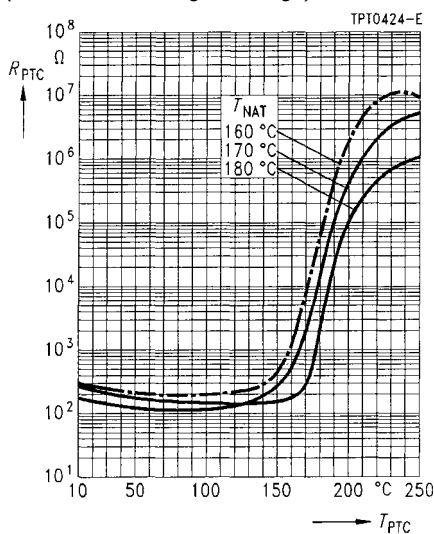


### Applications

- Liquid level detection, e. g. for overflow protection in oil tanks

### Features


- Hermetically sealed glass case
- Marked with date of manufacture  
Example: 11 G 3  
G = 1996  
3 = March
- Solderability complies with IEC 68-2-20
- TÜV approval



Dimensions (mm)

| Type                                     |                                                                   | Ordering code   |                    |
|------------------------------------------|-------------------------------------------------------------------|-----------------|--------------------|
| E 11                                     |                                                                   | Q63100-P430-E11 |                    |
| Max. operating voltage                   | $V_{\max}$                                                        | 24              | V                  |
| Rated resistance                         | $R_N \pm \Delta R$                                                | $140 \pm 60$    | $\Omega$           |
| Pressure test                            | $p$                                                               | 4               | bar                |
| Operating temperature range ( $V = 0$ V) | $T_{\text{op}}$                                                   | $-55/+100$      | $^{\circ}\text{C}$ |
|                                          | $T_{\text{op}}$                                                   | $-25/+50$       | $^{\circ}\text{C}$ |
| Number of cycles                         | ( $R_V = 100 \Omega$ )<br>$N$                                     | $\geq 5000$     |                    |
| Residual current in oil                  | ( $V = 12$ V, $T_A = 50^{\circ}\text{C}$ )<br>$I_{\text{r,oil}}$  | $\geq 45$       | mA                 |
| Residual current in air                  | ( $V = 14$ V, $T_A = -25^{\circ}\text{C}$ )<br>$I_{\text{r,air}}$ | $\leq 33,5$     | mA                 |
| Minimum resistance                       | ( $V = 24$ V)<br>$R_{\min}$                                       | 70              | $\Omega$           |
| Switching time                           | $t_S$                                                             | 2               | s                  |
| Settling time                            | $t_E$                                                             | 40              | s                  |
| Surface temperature                      | ( $V = 24$ V)<br>$T_{\text{surf}}$                                | $< 200$         | $^{\circ}\text{C}$ |


### Test set-up



TPT0024-P

- Unclipped leads, held at the ends by clamps
- Sensor in vertical position
- Distance of clamping point to body: min. 22 mm
- Pellet points downwards
- Settling time after application of voltage: min. 40 s

### Limits of operating range

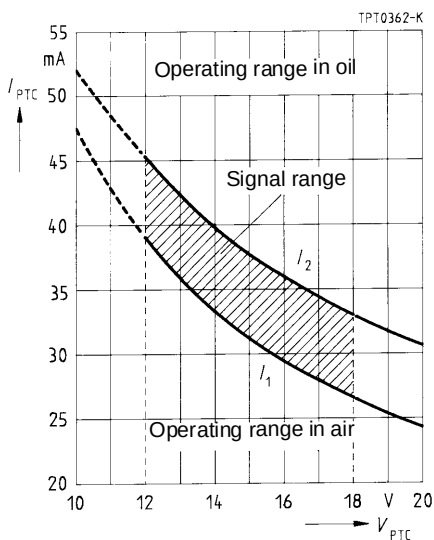


**Applications**

- Liquid level detection

**Features**

- Hermetically sealed glass case
- Marked with type designation and manufacturer's logo
- Solderability complies with IEC 68-2-20
- ESD packing




Dimensions (mm)

| Type                                     |                                                                   | Ordering code    |                    |
|------------------------------------------|-------------------------------------------------------------------|------------------|--------------------|
| E 1020                                   |                                                                   | B59020-E1160-A41 |                    |
| Max. operating voltage                   | $V_{\max}$                                                        | 24               | V                  |
| Rated resistance                         | $R_N \pm \Delta R$                                                | $135 \pm 35$     | $\Omega$           |
| Operating temperature range ( $V = 0$ V) | $T_{\text{op}}$                                                   | $-55/+100$       | $^{\circ}\text{C}$ |
|                                          | $T_{\text{op}}$                                                   | $-25/+60$        | $^{\circ}\text{C}$ |
| Number of cycles                         | $N$                                                               | $\geq 5000$      |                    |
| Residual current in oil                  | $(R_V = 110 \Omega)$                                              |                  |                    |
|                                          | $(V = 18 \text{ V}, T_A = 50^{\circ}\text{C})$                    | $\geq 41,7$      | mA                 |
| Residual current in air                  | $(R_V = 110 \Omega, V = 18 \text{ V}, T_A = -25^{\circ}\text{C})$ |                  |                    |
|                                          | $(V = 24 \text{ V})$                                              | $\leq 26,7$      | mA                 |
| Minimum resistance                       | $R_{\min}$                                                        | 70               | $\Omega$           |
| Switching time                           | $t_s$                                                             | 2                | s                  |
| Settling time                            | $t_E$                                                             | 40               | s                  |
| Surface temperature                      | $T_{\text{surf}}$                                                 | $< 200$          | $^{\circ}\text{C}$ |



### Test set-up



TPT0024-P


- Unclipped leads, held at the ends by clamps
- Sensor in vertical position
- Distance of clamping point to body: min. 22 mm
- Pellet points downwards
- Settling time after application of voltage: min. 40 s

**Applications**

- Liquid level detection in tanks (oil, gas, etc.) and household appliances

**Features**


- Hermetically sealed stainless steel case (withstands liquid pressure of up to 10 bar)
- Solderability complies with IEC 68-2-20
- Rust- and acid-resistant in accordance with DIN 17440

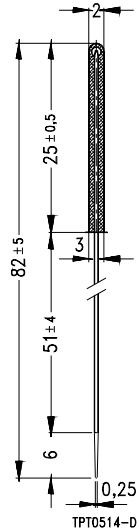

Dimensions (mm)


| Type                                     |                                                                   |             | Ordering code      |  |
|------------------------------------------|-------------------------------------------------------------------|-------------|--------------------|--|
| D 1010                                   |                                                                   |             | B59010-D1135-B40   |  |
| Max. operating voltage                   | $V_{\max}$                                                        | 24          | V                  |  |
| Rated resistance                         | $R_{25}$                                                          | 100 – 200   | $\Omega$           |  |
| Pressure test                            | $p$                                                               | 25          | bar                |  |
| Operating temperature range ( $V = 0$ V) | $T_{\text{op}}$                                                   | – 55/+ 100  | $^{\circ}\text{C}$ |  |
|                                          | $T_{\text{op}}$                                                   | – 25/+ 50   | $^{\circ}\text{C}$ |  |
| Number of cycles                         | ( $R_V = 100 \Omega$ , $V = V_{\max}$ ) $N$                       | 5000        |                    |  |
| Residual current in oil                  | ( $V = 12$ V, $T_A = 50$ $^{\circ}\text{C}$ ) $I_{r,\text{oil}}$  | $\geq 45$   | mA                 |  |
| Residual current in air                  | ( $V = 14$ V, $T_A = -25$ $^{\circ}\text{C}$ ) $I_{r,\text{air}}$ | $\leq 33,5$ | mA                 |  |
| Minimum resistance                       | ( $V = 24$ V) $R_{\min}$                                          | 70          | $\Omega$           |  |
| Switching time                           | $t_S$                                                             | 2           | s                  |  |
| Settling time                            | $t_E$                                                             | 40          | s                  |  |
| Surface temperature                      | ( $V = 24$ V) $T_{\text{surf}}$                                   | $< 200$     | $^{\circ}\text{C}$ |  |

### Test set-up



- Unclipped leads, held at the ends by clamps
- Sensor in vertical position
- Distance of clamping point to body: min. 15 mm
- Pellet points downwards
- Settling time after application of voltage: min. 40 s

### Limits of operating range

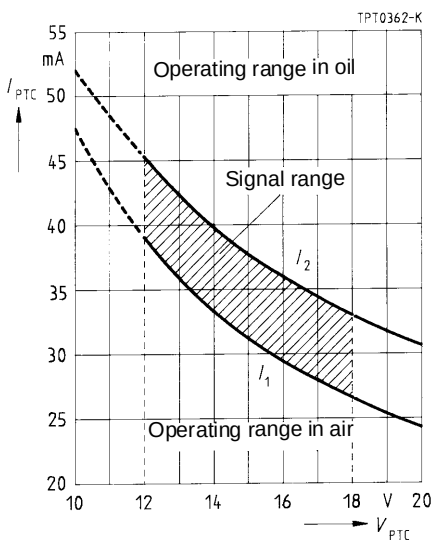

30 V

Applications


- General-purpose usage in temperature measurement and control
- Limit temperature monitoring

Features

- Coated thermistor disk
- Tinned leads
- Marked with stamp

Options

- Also available on tape



Dimensions (mm)



|                               |                   |              |                    |
|-------------------------------|-------------------|--------------|--------------------|
| Max. operating voltage        | $V_{\max}$        | 30           | V                  |
| Tolerance of rated resistance | $\Delta R_N^{1)}$ | $\pm 25 \%$  |                    |
| Response time                 | $t_a$             | $< 5$        | s                  |
| Operating temperature range   | $T_{op}$          | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                               | $T_{op}$          | 0/60         | $^{\circ}\text{C}$ |

| Type                 | $T_{\text{Ref}} \pm \Delta T$ | $R_N$             | $R_{\text{Ref}}$ | $R(T_{\text{Ref}} - \Delta T)$ | $R(T_{\text{Ref}} + \Delta T)$ | $R_{\min}$ |
|----------------------|-------------------------------|-------------------|------------------|--------------------------------|--------------------------------|------------|
|                      | $^{\circ}\text{C}$            | $\Omega$          | $\Omega$         | $\Omega$                       | $\Omega$                       | $\Omega$   |
| C 1011 <sup>1)</sup> | $- 30 \pm 5$                  | $> 100 \text{ k}$ | 1400             | $\leq 2100$                    | $\geq 700$                     | 700        |
| C 1011 <sup>1)</sup> | $0 \pm 5$                     | $> 5000$          | 1200             | $\leq 1800$                    | $\geq 600$                     | 600        |
| C 1011               | $40 \pm 5$                    | 110               | 190              | $\leq 250$                     | $\geq 130$                     | 95         |
| C 1011               | $60 \pm 5$                    | 80                | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1011               | $80 \pm 5$                    | 80                | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1011               | $120 \pm 5$                   | 85                | 150              | $\leq 200$                     | $\geq 100$                     | 75         |
| C 1011               | $160 \pm 6$                   | 110               | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1011               | $180 \pm 7$                   | 110               | 140              | $\leq 190$                     | $\geq 90$                      | 70         |

<sup>1)</sup>  $\Delta R_N = \pm 25 \%$  not valid for B59011-C1930-A70 and B59011-C1000-A70.

Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

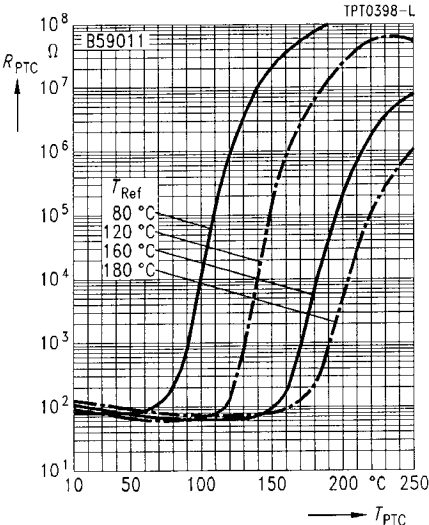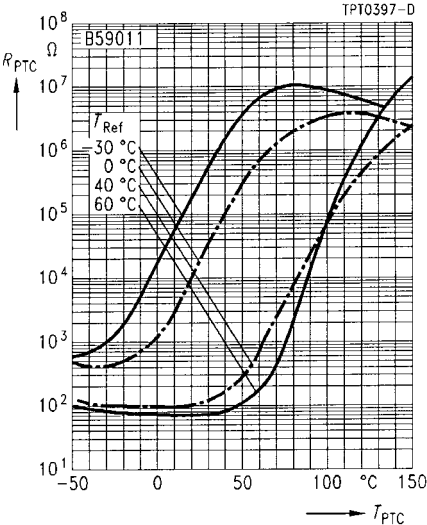

| Type   | $I_{max}$ | $T_{Rmin}$ | $T_{PTC}$ | $R(T_{PTC})$ | Ordering code    |
|--------|-----------|------------|-----------|--------------|------------------|
|        | mA        | °C         | °C        | $\Omega$     |                  |
| C 1011 | 45        | − 70       | 40        | $\geq 200$ k | B59011-C1930-A70 |
| C 1011 | 50        | − 40       | 60        | $\geq 200$ k | B59011-C1000-A70 |
| C 1011 | 320       | 0          | 100       | $\geq 50$ k  | B59011-C1040-A70 |
| C 1011 | 380       | 20         | 110       | $\geq 50$ k  | B59011-C1060-A70 |
| C 1011 | 380       | 40         | 125       | $\geq 50$ k  | B59011-C1080-A70 |
| C 1011 | 400       | 80         | 155       | $\geq 50$ k  | B59011-C1120-A70 |
| C 1011 | 380       | 120        | 200       | $\geq 10$ k  | B59011-C1160-A70 |
| C 1011 | 430       | 140        | 220       | $\geq 5$ k   | B59011-C1180-A70 |


265 V

Applications

- General-purpose usage in temperature measurement and control
- Limit temperature monitoring

Features

- Coated thermistor disk
- Tinned leads
- Marked with stamp
- Suitable for automatic insertion

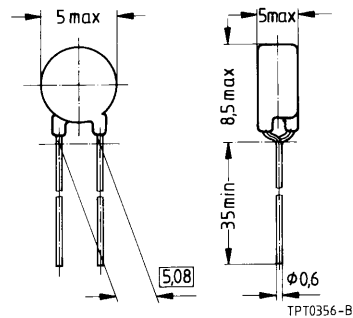

Dimensions (mm)

Options



- Also available on tape

|                               |                  |             |                    |
|-------------------------------|------------------|-------------|--------------------|
| Max. operating voltage        | $V_{\max}$       | 265         | V                  |
| Tolerance of rated resistance | $\Delta R_N$     | $\pm 25 \%$ |                    |
| Response time                 | $t_a$            | $< 10$      | s                  |
| Operating temperature range   | $T_{\text{op}}$  | $-25/+125$  | $^{\circ}\text{C}$ |
|                               | $(V = 0)$        |             |                    |
|                               | $(V = V_{\max})$ | $0/60$      | $^{\circ}\text{C}$ |

| Type   | $T_{\text{Ref}} \pm \Delta T$ | $R_N$    | $R_{\text{Ref}}$ | $R(T_{\text{Ref}} - \Delta T)$ | $R(T_{\text{Ref}} + \Delta T)$ | $R_{\min}$ |
|--------|-------------------------------|----------|------------------|--------------------------------|--------------------------------|------------|
|        | $^{\circ}\text{C}$            | $\Omega$ | $\Omega$         | $\Omega$                       | $\Omega$                       | $\Omega$   |
| C 1012 | $40 \pm 5$                    | 130      | 220              | $\leq 290$                     | $\geq 150$                     | 110        |
| C 1012 | $60 \pm 5$                    | 80       | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1012 | $80 \pm 5$                    | 80       | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1012 | $120 \pm 5$                   | 96       | 170              | $\leq 220$                     | $\geq 120$                     | 85         |
| C 1012 | $160 \pm 6$                   | 110      | 160              | $\leq 210$                     | $\geq 110$                     | 80         |
| C 1012 | $180 \pm 7$                   | 130      | 160              | $\leq 210$                     | $\geq 110$                     | 80         |

Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

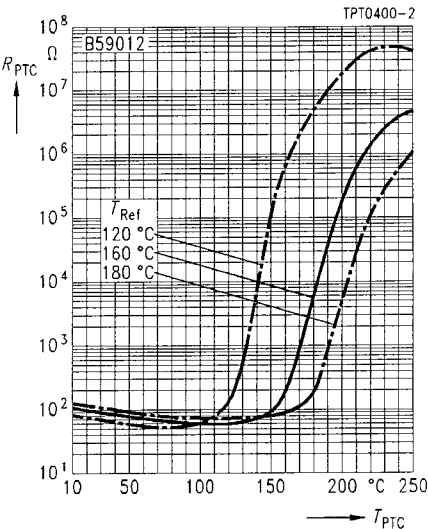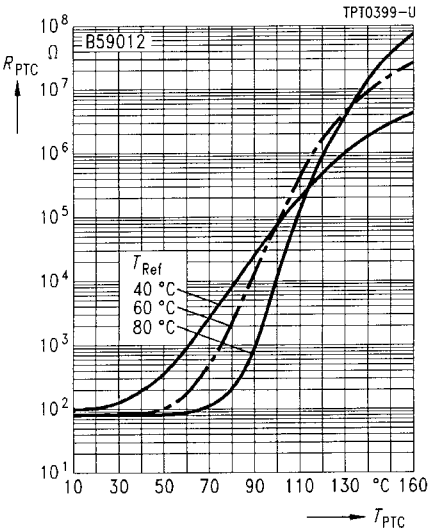

| Type   | $I_{max}$ | $T_{Rmin}$ | $T_{PTC}$ | $R(T_{PTC})$        | Ordering code    |
|--------|-----------|------------|-----------|---------------------|------------------|
|        | A         | °C         | °C        | $\Omega$            |                  |
| C 1012 | 0,3       | 0          | 115       | $\geq 10 \text{ k}$ | B59012-C1040-A70 |
| C 1012 | 0,3       | 20         | 120       | $\geq 10 \text{ k}$ | B59012-C1060-A70 |
| C 1012 | 0,3       | 40         | 135       | $\geq 10 \text{ k}$ | B59012-C1080-A70 |
| C 1012 | 0,3       | 80         | 175       | $\geq 10 \text{ k}$ | B59012-C1120-A70 |
| C 1012 | 0,3       | 120        | 200       | $\geq 10 \text{ k}$ | B59012-C1160-A70 |
| C 1012 | 0,3       | 140        | 220       | $\geq 10 \text{ k}$ | B59012-C1180-A70 |

265 V

Applications


- General-purpose usage in temperature measurement and control
- Limit temperature monitoring

Features

- Coated thermistor disk
- Tinned leads
- Marked with stamp
- Suitable for automatic insertion

Options

- Also available on tape



Dimensions (mm)



|                               |                  |              |                    |
|-------------------------------|------------------|--------------|--------------------|
| Max. operating voltage        | $V_{\max}$       | 265          | V                  |
| Tolerance of rated resistance | $\Delta R_N$     | $\pm 25 \%$  |                    |
| Response time                 | $t_a$            | $< 20$       | s                  |
| Operating temperature range   | $T_{\text{op}}$  | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                               | $(V = 0)$        |              |                    |
|                               | $(V = V_{\max})$ | $0/60$       | $^{\circ}\text{C}$ |

| Type   | $T_{\text{Ref}} \pm \Delta T$ | $R_N$    | $R_{\text{Ref}}$ | $R(T_{\text{Ref}} - \Delta T)$ | $R(T_{\text{Ref}} + \Delta T)$ | $R_{\min}$ |
|--------|-------------------------------|----------|------------------|--------------------------------|--------------------------------|------------|
|        | $^{\circ}\text{C}$            | $\Omega$ | $\Omega$         | $\Omega$                       | $\Omega$                       | $\Omega$   |
| C 1013 | $40 \pm 5$                    | 46       | 80               | $\leq 105$                     | $\geq 55$                      | 40         |
| C 1013 | $60 \pm 5$                    | 27       | 54               | $\leq 70$                      | $\geq 38$                      | 27         |
| C 1013 | $80 \pm 5$                    | 27       | 54               | $\leq 70$                      | $\geq 38$                      | 27         |
| C 1013 | $120 \pm 5$                   | 33       | 58               | $\leq 75$                      | $\geq 40$                      | 29         |
| C 1013 | $160 \pm 6$                   | 40       | 58               | $\leq 75$                      | $\geq 40$                      | 29         |
| C 1013 | $180 \pm 7$                   | 46       | 58               | $\leq 75$                      | $\geq 40$                      | 29         |



Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

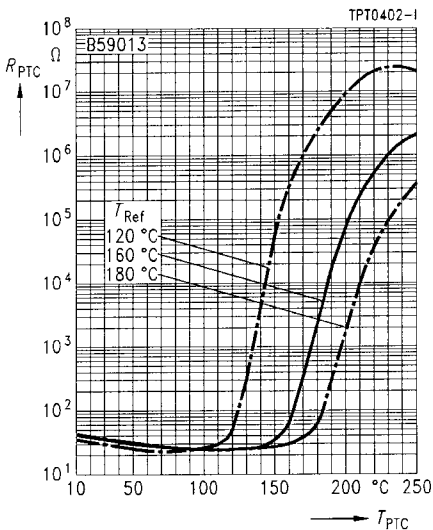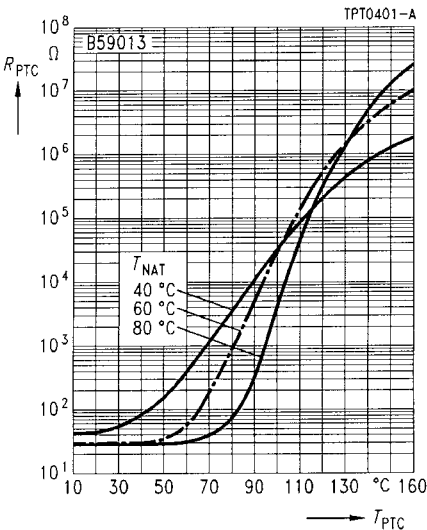

| Type   | $I_{max}$ | $T_{Rmin}$         | $T_{PTC}$          | $R(T_{PTC})$       | Ordering code    |
|--------|-----------|--------------------|--------------------|--------------------|------------------|
|        | A         | $^{\circ}\text{C}$ | $^{\circ}\text{C}$ | $\Omega$           |                  |
| C 1013 | 1         | 0                  | 115                | $\geq 4 \text{ k}$ | B59013-C1040-A70 |
| C 1013 | 1         | 20                 | 120                | $\geq 4 \text{ k}$ | B59013-C1060-A70 |
| C 1013 | 1         | 40                 | 135                | $\geq 4 \text{ k}$ | B59013-C1080-A70 |
| C 1013 | 1         | 80                 | 175                | $\geq 4 \text{ k}$ | B59013-C1120-A70 |
| C 1013 | 1         | 120                | 200                | $\geq 4 \text{ k}$ | B59013-C1160-A70 |
| C 1013 | 1         | 140                | 220                | $\geq 4 \text{ k}$ | B59013-C1180-A70 |


30 V

Applications

- Sensor for small measuring points
- Limit temperature monitoring

Features

- Coated thermistor disk
- Tinned leads
- Marked with coded nominal threshold temperature
- Characteristics for nominal threshold temperatures of 90 to 160 °C conform with DIN 44 081
- Extremely fast response due to small dimensions



Dimensions (mm)



|                                       |                                                            |                       |              |                    |
|---------------------------------------|------------------------------------------------------------|-----------------------|--------------|--------------------|
| Max. operating voltage                | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$            | 30           | V                  |
| Max. measuring voltage                | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Meas,max}}$ | 7,5          | V                  |
| Rated resistance                      | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                 | $\leq 250$   | $\Omega$           |
| Response time                         |                                                            | $t_a$                 | $< 3$        | s                  |
| Operating temperature range $(V = 0)$ |                                                            | $T_{\text{op}}$       | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                                       | $(V = V_{\max})$                                           | $T_{\text{op}}$       | 0/40         | $^{\circ}\text{C}$ |

| Type/<br>Stamp<br>code | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R^1)$<br>$(T_{\text{NAT}} - \Delta T)$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + \Delta T)$<br>$\Omega$ | $R^2)$<br>$(T_{\text{NAT}} + 15 \text{ K})$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + 23 \text{ K})$<br>$\Omega$ | Ordering code   |
|------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|-----------------|
| C 8 f                  | $60 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 4 \text{ k}$                                      | B59008-C60-A40  |
| C 8 g                  | $70 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 4 \text{ k}$                                      | B59008-C70-A40  |
| C 8 h                  | $80 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 4 \text{ k}$                                      | B59008-C80-A40  |
| C 8 i                  | $90 \pm 5$                                          | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C90-A40  |
| C 8 j                  | $100 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C100-A40 |
| C 8 k                  | $110 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C110-A40 |
| C 8 l                  | $120 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C120-A40 |
| C 8 m                  | $130 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C130-A40 |
| C 8 n                  | $140 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C140-A40 |
| C 8 o                  | $145 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C145-A40 |
| C 8 p                  | $150 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C150-A40 |
| C 8 r                  | $155 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C155-A40 |
| C 8 s                  | $160 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59008-C160-A40 |
| C 8 t                  | $170 \pm 7$                                         | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 4 \text{ k}$                                      | B59008-C170-A40 |
| C 8 u                  | $180 \pm 7$                                         | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 4 \text{ k}$                                      | B59008-C180-A40 |



<sup>1)</sup>  $V_{\text{PTC}} \leq 2,5 \text{ V}$   
<sup>2)</sup>  $V_{\text{PTC}} \leq 7,5 \text{ V}$

# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

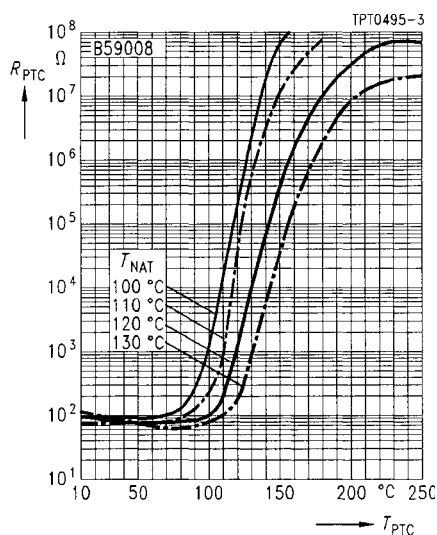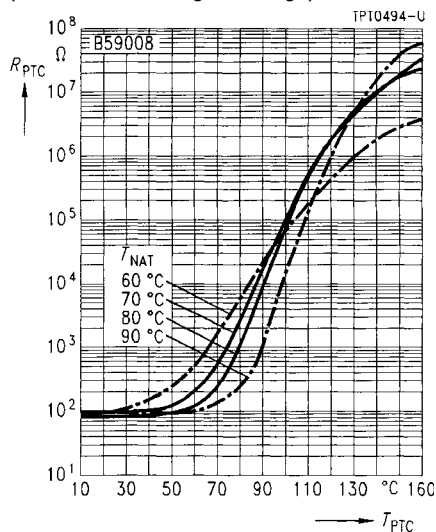

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

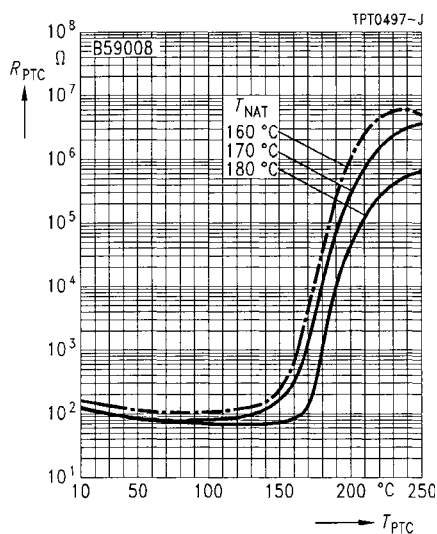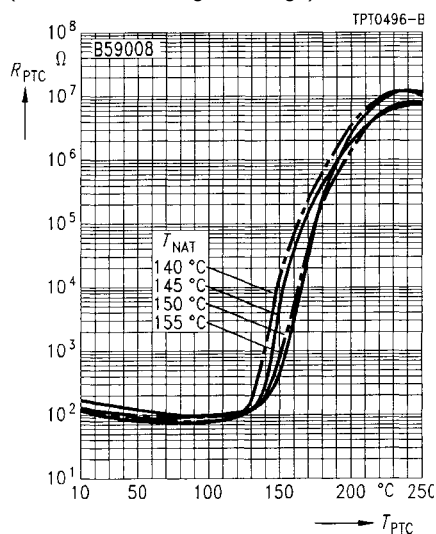


30 V

Applications

- Sensor for small measuring points
- Limit temperature monitoring

Features

- Coated thermistor disk
- Tinned leads
- Manufacturer's logo and type designation stamped on in white
- Characteristics for nominal threshold temperatures of 90 to 160 °C conform with DIN 44 081
- Also available on tape



Dimensions (mm)



|                             |                                                            |                       |              |                    |
|-----------------------------|------------------------------------------------------------|-----------------------|--------------|--------------------|
| Max. operating voltage      | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$            | 30           | V                  |
| Max. measuring voltage      | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Meas,max}}$ | 7,5          | V                  |
| Rated resistance            | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                 | $\leq 100$   | $\Omega$           |
| Response time               |                                                            | $t_a$                 | $< 5$        | s                  |
| Operating temperature range | $(V = 0)$                                                  | $T_{\text{op}}$       | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                             | $(V = V_{\max})$                                           | $T_{\text{op}}$       | 0/40         | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R^1)$<br>$(T_{\text{NAT}} - \Delta T)$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + \Delta T)$<br>$\Omega$ | $R^2)$<br>$(T_{\text{NAT}} + 15 \text{ K})$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + 23 \text{ K})$<br>$\Omega$ | Ordering code   |
|-------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|-----------------|
| C 100 | $60 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59100-C60-A70  |
| C 100 | $70 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59100-C70-A70  |
| C 100 | $80 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59100-C80-A70  |
| C 100 | $90 \pm 5$                                          | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C90-A70  |
| C 100 | $100 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C100-A70 |
| C 100 | $110 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C110-A70 |
| C 100 | $120 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C120-A70 |
| C 100 | $130 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C130-A70 |
| C 100 | $140 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C140-A70 |
| C 100 | $145 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C145-A70 |
| C 100 | $150 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C150-A70 |
| C 100 | $155 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C155-A70 |
| C 100 | $160 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C160-A70 |
| C 100 | $170 \pm 6$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C170-A70 |
| C 100 | $180 \pm 6$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59100-C180-A70 |



<sup>1)</sup>  $V_{\text{PTC}} \leq 2,5 \text{ V}$   
<sup>2)</sup>  $V_{\text{PTC}} \leq 7,5 \text{ V}$

# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

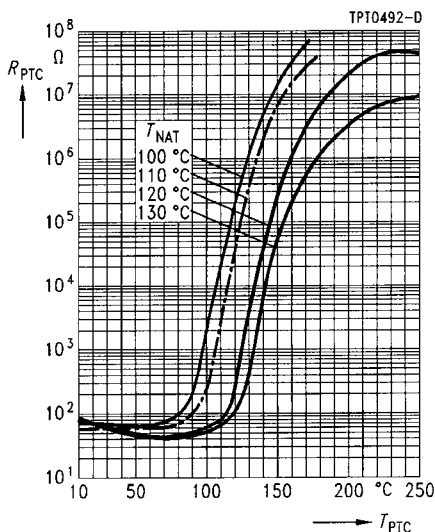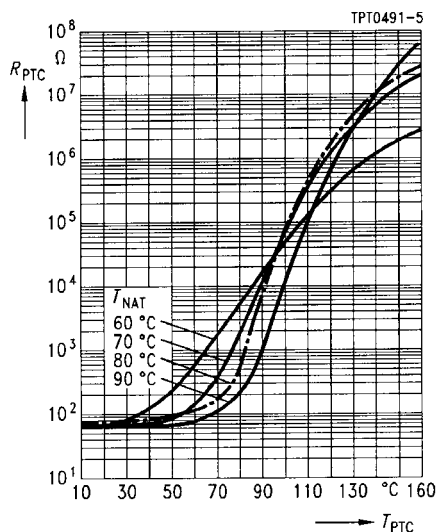

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

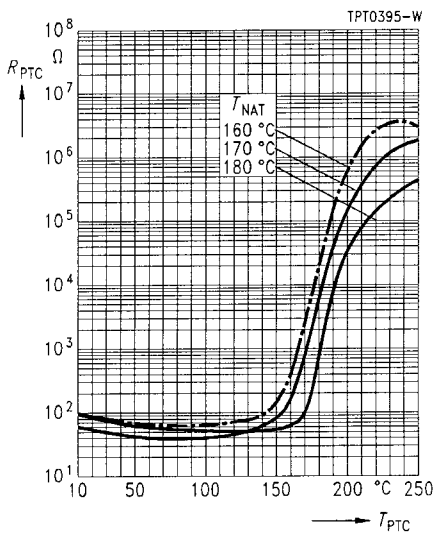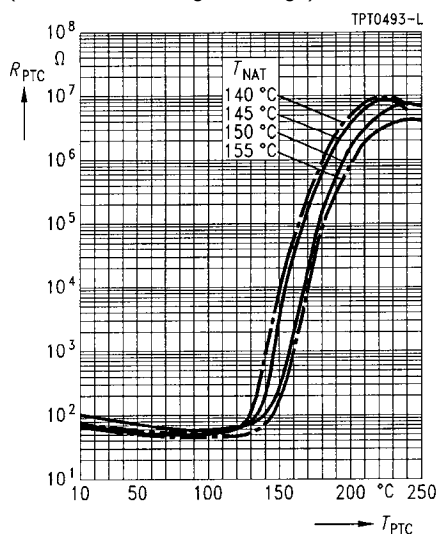


20 V

Applications

- Limit temperature sensor in screw-type case

Features

- Insulated screw-type metal case, thread M4
- Tinned leads
- Color-coded sealing with black dot
- Case permits good thermal coupling





Dimensions (mm)

|                                         |              |             |       |
|-----------------------------------------|--------------|-------------|-------|
| Max. operating voltage                  | $V_{\max}$   | 20          | V     |
| Tolerance of rated resistance           | $\Delta R_N$ | + 50/– 25 % |       |
| Insulation test voltage                 | $V_{is}$     | 3           | kV ac |
| Response time                           | $t_a$        | < 50        | s     |
| Operating temperature range ( $V = 0$ ) | $T_{op}$     | – 25/+ 125  | °C    |
| ( $V = V_{\max}$ )                      | $T_{op}$     | 0/60        | °C    |

| Type  | $T_{Ref} \pm \Delta T$ | $R_N$ | $R_{Ref}$ | $R(T_{Ref} - \Delta T)$ | $R(T_{Ref} + \Delta T)$ | $R_{min}$ |
|-------|------------------------|-------|-----------|-------------------------|-------------------------|-----------|
|       | °C                     | Ω     | Ω         | Ω                       | Ω                       | Ω         |
| D 401 | 40 ± 5                 | 130   | 230       | ≤ 350                   | ≥ 170                   | 115       |
| D 401 | 60 ± 5                 | 80    | 160       | ≤ 240                   | ≥ 120                   | 80        |
| D 401 | 80 ± 5                 | 80    | 152       | ≤ 230                   | ≥ 110                   | 76        |
| D 401 | 90 ± 5                 | 80    | 152       | ≤ 230                   | ≥ 110                   | 76        |
| D 401 | 120 ± 5                | 80    | 148       | ≤ 225                   | ≥ 105                   | 74        |

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

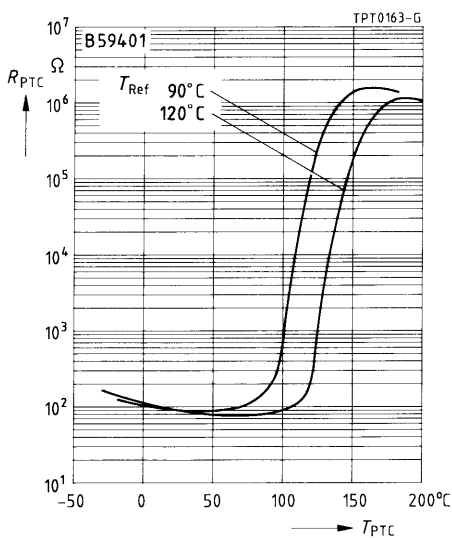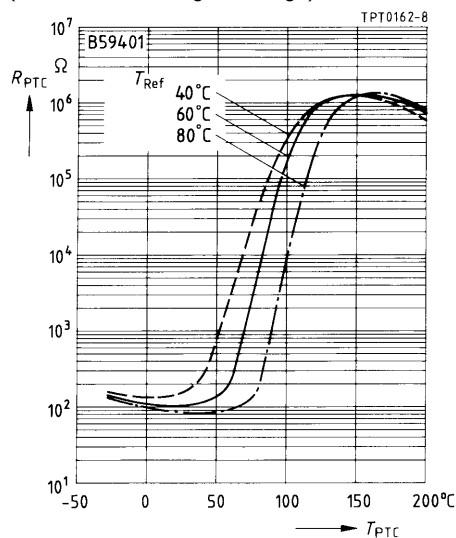

| Type  | $I_{max}$ | $T_{Rmin}$       | $T_{PTC}$        | $R(T_{PTC})$         | Color of sealing | Ordering code   |
|-------|-----------|------------------|------------------|----------------------|------------------|-----------------|
|       | mA        | $^\circ\text{C}$ | $^\circ\text{C}$ | $\Omega$             |                  |                 |
| D 401 | 175       | $-10$            | 95               | $\geq 100 \text{ k}$ | blue             | B59401-D40-A40  |
| D 401 | 270       | 20               | 110              | $\geq 100 \text{ k}$ | violet           | B59401-D60-A40  |
| D 401 | 270       | 40               | 125              | $\geq 100 \text{ k}$ | orange           | B59401-D80-A40  |
| D 401 | 270       | 50               | 130              | $\geq 100 \text{ k}$ | clear            | B59401-D90-A40  |
| D 401 | 270       | 80               | 155              | $\geq 100 \text{ k}$ | green            | B59401-D120-A40 |


30 V

### Applications

- Limit temperature sensor

### Features

- Insulated screw-type metal case
- Thread M3
- Tinned leads
- Marked with nominal threshold temperature and type designation
- Characteristics for nominal threshold temperatures of 90 to 160 °C conform with DIN 44 081
- Fast response due to small dimensions



Dimensions (mm)

|                             |                                                                       |                       |              |                    |
|-----------------------------|-----------------------------------------------------------------------|-----------------------|--------------|--------------------|
| Max. operating voltage      | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$                         | $V_{\max}$            | 30           | V                  |
| Max. measuring voltage      | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$            | $V_{\text{Meas,max}}$ | 7,5          | V                  |
| Rated resistance            | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                                 | $R_N$                 | $\leq 100$   | $\Omega$           |
| Insulation test voltage     |                                                                       | $V_{\text{is}}$       | 1,5          | kV ac              |
| Response time               | $(T_{\text{NAT}} - 20 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $t_a$                 | $< 20$       | s                  |
| Operating temperature range | $(V = 0)$                                                             | $T_{\text{op}}$       | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                             | $(V = V_{\max})$                                                      | $T_{\text{op}}$       | 0/40         | $^{\circ}\text{C}$ |

| Type  | $T_{\text{NAT}} \pm \Delta T$<br>$^{\circ}\text{C}$ | $R^1)$<br>$(T_{\text{NAT}} - \Delta T)$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + \Delta T)$<br>$\Omega$ | $R^2)$<br>$(T_{\text{NAT}} + 15 \text{ K})$<br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + 23 \text{ K})$<br>$\Omega$ | Ordering code   |
|-------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|-----------------|
| D 801 | $60 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59801-D60-A70  |
| D 801 | $70 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59801-D70-A70  |
| D 801 | $80 \pm 5$                                          | $\leq 570$                                          | $\geq 570$                                          | —                                                       | $\geq 10 \text{ k}$                                     | B59801-D80-A70  |
| D 801 | $90 \pm 5$                                          | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D90-A70  |
| D 801 | $100 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D100-A70 |
| D 801 | $110 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D110-A70 |
| D 801 | $120 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D120-A70 |
| D 801 | $130 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D130-A70 |
| D 801 | $140 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D140-A70 |
| D 801 | $145 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D145-A70 |
| D 801 | $150 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D150-A70 |
| D 801 | $155 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D155-A70 |
| D 801 | $160 \pm 5$                                         | $\leq 550$                                          | $\geq 1330$                                         | $\geq 4 \text{ k}$                                      | —                                                       | B59801-D160-A70 |



<sup>1)</sup>  $V_{\text{PTC}} \leq 2,5 \text{ V}$

<sup>2)</sup>  $V_{\text{PTC}} \leq 7,5 \text{ V}$





# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

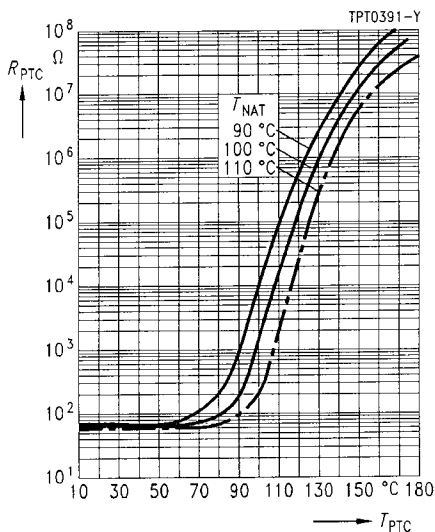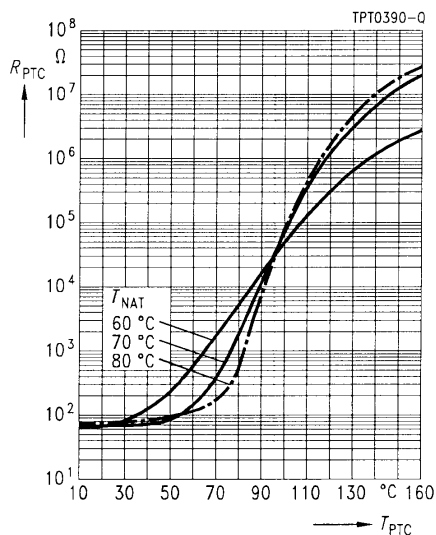

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

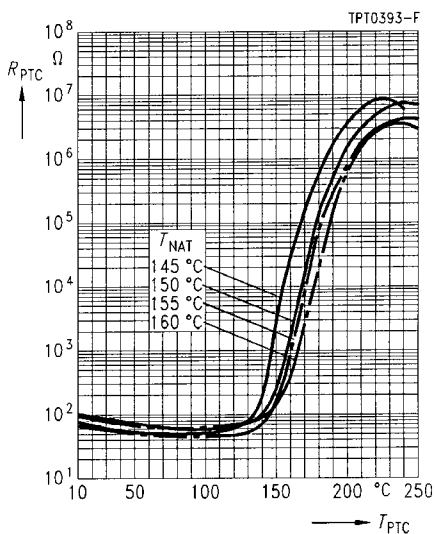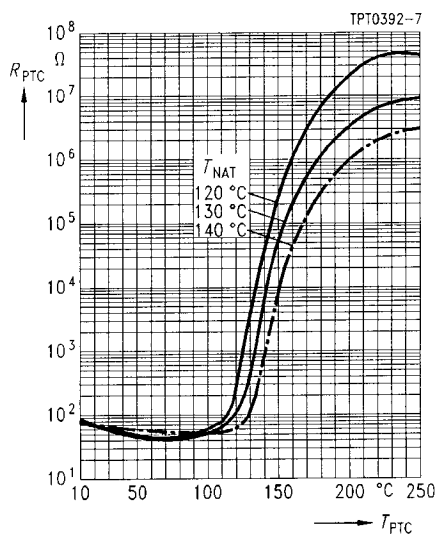


30 V

Applications

- Limit temperature sensor

Features

- Sensor with epoxy resin coating
- Tinned leads
- Metal tag for easy mounting
- Characteristics for nominal threshold temperatures of 90 to 160 °C conform with DIN 44 081
- Metal tag permits good thermal coupling and thus short response times



Dimensions (mm)



|                                         |                                                            |                        |              |                    |
|-----------------------------------------|------------------------------------------------------------|------------------------|--------------|--------------------|
| Max. operating voltage                  | $(T_A = 0 \dots 40 \text{ }^{\circ}\text{C})$              | $V_{\max}$             | 30           | V                  |
| Max. measuring voltage                  | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Meas},\max}$ | 7,5          | V                  |
| Rated resistance                        | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                  | $\leq 100$   | $\Omega$           |
| Response time                           |                                                            | $t_a$                  | $< 20$       | s                  |
| Operating temperature range ( $V = 0$ ) |                                                            | $T_{\text{op}}$        | $- 25/+ 125$ | $^{\circ}\text{C}$ |
|                                         | $(V = V_{\max})$                                           | $T_{\text{op}}$        | 0/40         | $^{\circ}\text{C}$ |

| Type/<br>Stamp<br>code | $T_{\text{NAT}}$<br>$\pm \Delta T$<br><br>$^{\circ}\text{C}$ | $R^1)$<br>$(T_{\text{NAT}} - \Delta T)$<br><br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + \Delta T)$<br><br>$\Omega$ | $R^2)$<br>$(T_{\text{NAT}} + 15 \text{ K})$<br><br>$\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + 23 \text{ K})$<br><br>$\Omega$ | Ordering code   |
|------------------------|--------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-----------------|
| D 901 331              | 60 ± 5                                                       | ≤ 570                                                   | ≥ 570                                                   | —                                                           | ≥ 10 k                                                      | B59901-D60-A40  |
| D 901 341              | 70 ± 5                                                       | ≤ 570                                                   | ≥ 570                                                   | —                                                           | ≥ 10 k                                                      | B59901-D70-A40  |
| D 901 351              | 80 ± 5                                                       | ≤ 570                                                   | ≥ 570                                                   | —                                                           | ≥ 10 k                                                      | B59901-D80-A40  |
| D 901 361              | 90 ± 5                                                       | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D90-A40  |
| D 901 371              | 100 ± 5                                                      | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D100-A40 |
| D 901 381              | 110 ± 5                                                      | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D110-A40 |
| D 901 391              | 120 ± 5                                                      | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D120-A40 |
| D 901 401              | 130 ± 5                                                      | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D130-A40 |
| D 901 411              | 140 ± 5                                                      | ≤ 550                                                   | ≥ 1330                                                  | ≥ 4 k                                                       | —                                                           | B59901-D140-A40 |


<sup>1)</sup>  $V_{\text{PTC}} \leq 2,5 \text{ V}$   
<sup>2)</sup>  $V_{\text{PTC}} \leq 7,5 \text{ V}$

# **Characteristics (typical)**

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

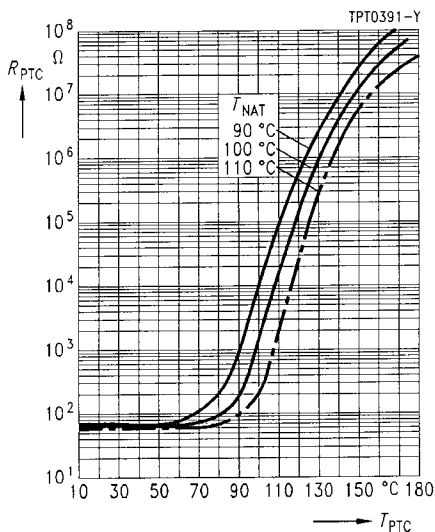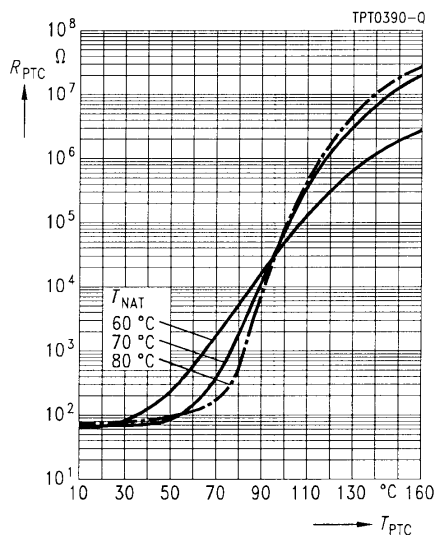

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

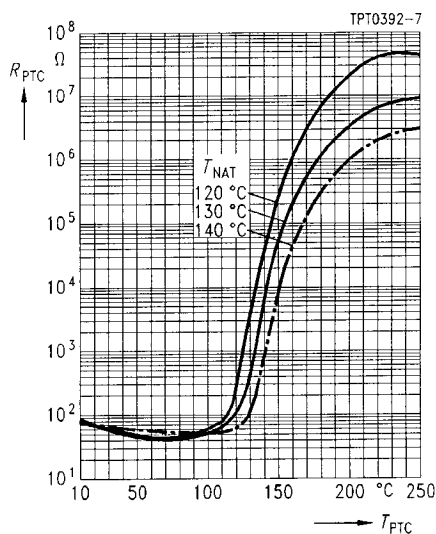


**25 V**

**Applications**

- Limit temperature sensor

**Features**

- Thermistor chip with silver terminations
- Very small size
- Fast and reliable response
- Suitable for reflow soldering, also for conductive adhesion
- Suitable for automatic placement
- Available on 8-mm blister tape (standard delivery mode)



 Termination

Dimensions (mm)

|                             |                                                            |                                    |                      |                                      |
|-----------------------------|------------------------------------------------------------|------------------------------------|----------------------|--------------------------------------|
| Max. operating voltage      | $(T_A = 0 \dots 40 \text{ } ^\circ\text{C})$               | $V_{\max}$                         | 25                   | V                                    |
| Max. measuring voltage      | $(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$ | $V_{\text{Meas,max}}$              | 7,5                  | V                                    |
| Rated resistance            | $(V_{\text{PTC}} \leq 2,5 \text{ V})$                      | $R_N$                              | $\leq 1$             | k $\Omega$                           |
| Operating temperature range | $(V = 0)$<br>$(V = V_{\max})$                              | $T_{\text{op}}$<br>$T_{\text{op}}$ | $- 25/+ 125$<br>0/40 | $^\circ\text{C}$<br>$^\circ\text{C}$ |



| Type   | $T_{\text{NAT}} \pm \Delta T$<br>$^\circ\text{C}$ | $R^1)$<br>$(T_{\text{NAT}} - \Delta T)$<br>k $\Omega$ | $R^1)$<br>$(T_{\text{NAT}} + \Delta T)$<br>k $\Omega$ | $R^2)$<br>$(T_{\text{NAT}} + 15 \text{ K})$<br>k $\Omega$ | Ordering code    |
|--------|---------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------|------------------|
| A 1701 | $90 \pm 5$                                        | $\leq 5,5$                                            | $\geq 13,3$                                           | $\geq 40$                                                 | B59701-A1090-A62 |
| A 1701 | $100 \pm 5$                                       | $\leq 5,5$                                            | $\geq 13,3$                                           | $\geq 40$                                                 | B59701-A1100-A62 |
| A 1701 | $110 \pm 5$                                       | $\leq 5,5$                                            | $\geq 13,3$                                           | $\geq 40$                                                 | B59701-A1110-A62 |
| A 1701 | $120 \pm 5$                                       | $\leq 5,5$                                            | $\geq 13,3$                                           | $\geq 40$                                                 | B59701-A1120-A62 |
| A 1701 | $130 \pm 5$                                       | $\leq 5,5$                                            | $\geq 13,3$                                           | $\geq 40$                                                 | B59701-A1130-A62 |

<sup>1)</sup>  $V_{\text{PTC}} \leq 2,5 \text{ V}$

<sup>2)</sup>  $V_{\text{PTC}} \leq 7,5 \text{ V}$

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

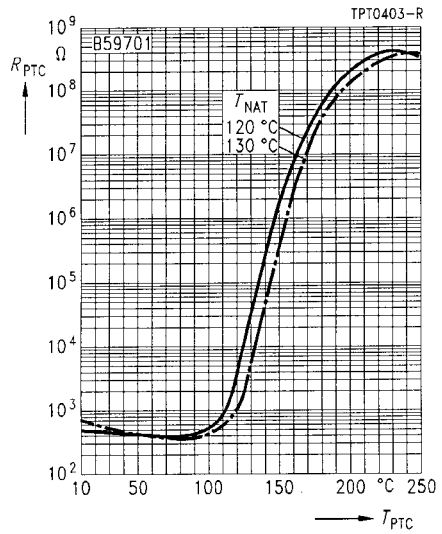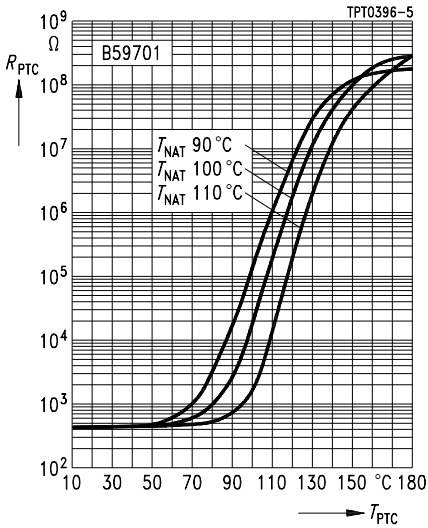


**12 V**

**Applications**

- Heating element for small heating systems, e. g. in automobiles

**Features**

- Thermistor disk with silver metallization on front surfaces
- Suitable for clamp-contacting and glue-bonding
- Curvature < 0,2 mm



Dimensions (mm)

|                                         |            |                      |    |
|-----------------------------------------|------------|----------------------|----|
| Max. operating voltage                  | $V_{max}$  | 30                   | V  |
| Rated voltage                           | $V_N$      | 12                   | V  |
| Breakdown voltage                       | $V_D$      | > 36                 | V  |
| Operating temperature range ( $V = 0$ ) | $T_{op}$   | - 40/+ 200           | °C |
| ( $V = V_N$ )                           | $T_{op}$   | - 25/+ 60            | °C |
| Resistance tolerance                    | $\Delta R$ | ± 30 % <sup>1)</sup> |    |

| Type | $T_{Ref}$<br>°C | $R_{min}$<br>( $V = V_N$ )<br>Ω | $T_{surf}$ <sup>3)</sup><br>( $V = V_N$ )<br>°C | $R_N$<br>( $V_{Meas} \leq 1,5 V$ )<br>Ω | Ordering code   |
|------|-----------------|---------------------------------|-------------------------------------------------|-----------------------------------------|-----------------|
| A 60 | 0               | 20 <sup>2)</sup>                | 40                                              | Š 320                                   | B59060-A-A10    |
| A 60 | 40              | 4 <sup>2)</sup>                 | 70                                              | 9                                       | B59060-A40-A10  |
| A 60 | 60              | 5                               | 85                                              | 9                                       | B59060-A60-A10  |
| A 60 | 80              | 4                               | 95                                              | 9                                       | B59060-A80-A10  |
| A 60 | 120             | 4                               | 130                                             | 9                                       | B59060-A120-A10 |
| A 60 | 160             | 3                               | 165                                             | 9                                       | B59060-A160-A10 |
| A 60 | 180             | 3                               | 180                                             | 9                                       | B59060-A180-A10 |
| A 60 | 220             | 2                               | 215                                             | 9                                       | B59060-A220-A10 |
| A 60 | 280             | 3                               | 270                                             | 18                                      | B59060-A280-A10 |



<sup>1)</sup> Tolerance not valid for B59060-A-A10

<sup>2)</sup> Valid for  $T_A < 25$  °C

<sup>3)</sup> Measured peak-to-peak

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

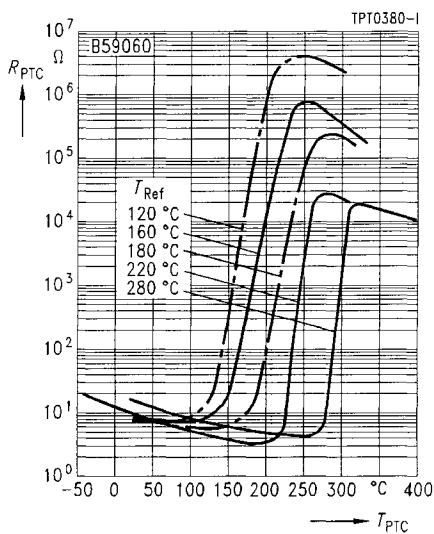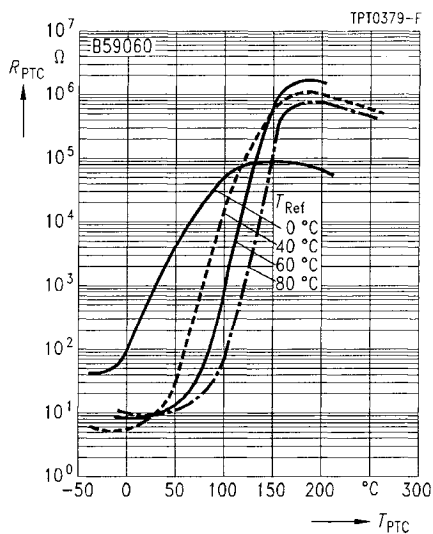

**12 V**

**Applications**


- General-purpose heating element,  
e. g. for automotive applications

**Features**

- Thermistor plate with aluminum metallization
- No migration effects
- For clamp-contacting
- Max. curvature 0,05 mm

**Options**

Other dimensions available upon request



Termination

Dimensions (mm)

|                                         |                 |            |    |
|-----------------------------------------|-----------------|------------|----|
| Max. operating voltage                  | $V_{\max}$      | 20         | V  |
| Rated voltage                           | $V_N$           | 12         | V  |
| Breakdown voltage                       | $V_D$           | > 40       | V  |
| Operating temperature range ( $V = 0$ ) | $T_{\text{op}}$ | – 40/+ 200 | °C |
| ( $V = V_N$ )                           | $T_{\text{oo}}$ | – 25/+ 60  | °C |
| Resistance tolerance                    | $\Delta R$      | ± 50 %     |    |

| Type        | $T_{\text{Ref}}$<br>°C | $R_{\min}$<br>( $V = V_N$ )<br>Ω | $T_{\text{surf}}^{2)}$<br>( $V = V_N$ )<br>°C | $R_N$<br>( $V_{\text{Meas}} \leq 1,5 \text{ V}$ )<br>Ω | Ordering code    |
|-------------|------------------------|----------------------------------|-----------------------------------------------|--------------------------------------------------------|------------------|
| R 1042-A40  | 40                     | 1,00 <sup>1)</sup>               | 75                                            | 3,2                                                    | B59042-R1040-A10 |
| R 1042-A60  | 60                     | 1,25                             | 90                                            | 3,2                                                    | B59042-R1060-A10 |
| R 1042-A80  | 80                     | 1,00                             | 105                                           | 3,2                                                    | B59042-R1080-A10 |
| R 1042-A120 | 120                    | 1,00                             | 145                                           | 3,2                                                    | B59042-R1120-A10 |
| R 1042-A160 | 160                    | 0,75                             | 180                                           | 3,2                                                    | B59042-R1160-A10 |
| R 1042-A180 | 180                    | 0,75                             | 200                                           | 3,2                                                    | B59042-R1180-A10 |
| R 1042-A220 | 220                    | 1,00                             | 230                                           | 6,4                                                    | B59042-R1220-A10 |
| R 1042-A280 | 280                    | 1,00                             | 280                                           | 12,8                                                   | B59042-R1280-A10 |



<sup>1)</sup> Valid for  $T_A < 25 \text{ °C}$

<sup>2)</sup> Measured peak-to-peak



### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

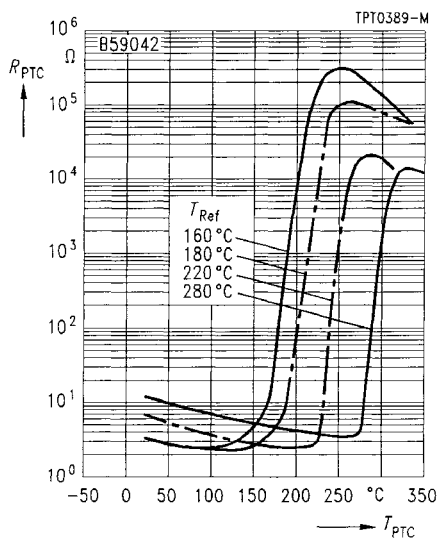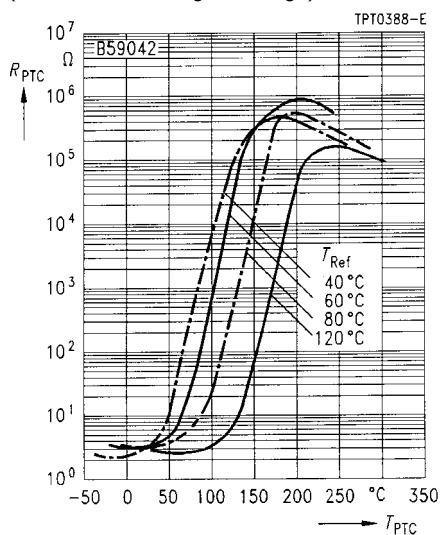


**230 V**

**Applications**

- Self-regulating heating element

**Features**

- Thermistor disk with silver metallization on front surfaces
- High electric strength
- Suitable for clamp-contacting and glue-bonding
- Curvature < 0,2 mm



Dimensions (mm)

|                                            |            |            |    |
|--------------------------------------------|------------|------------|----|
| Max. operating voltage                     | $V_{max}$  | 265        | V  |
| Rated voltage                              | $V_N$      | 230        | V  |
| Breakdown voltage ( $T_A = 25\text{ °C}$ ) | $V_D$      | 500        | V  |
| Operating temperature range ( $V = 0$ )    | $T_{op}$   | – 40/+ 200 | °C |
|                                            | $T_{od}$   | 0/60       | °C |
| Resistance tolerance                       | $\Delta R$ | ± 35 %     |    |



| Type | $T_{Ref}$<br>°C | $R_{min}$<br>( $V = V_N$ )<br>Ω | $T_{surf}^{2)}$<br>( $V = V_N$ )<br>°C | $R_N$<br>( $V_{Meas} \leq 1,5\text{ V}$ )<br>Ω | Ordering code   |
|------|-----------------|---------------------------------|----------------------------------------|------------------------------------------------|-----------------|
| A 53 | 50              | 1750 <sup>1)</sup>              | 90                                     | 4200                                           | B59053-A50-A10  |
| A 53 | 70              | 1400                            | 105                                    | 4200                                           | B59053-A70-A10  |
| A 53 | 90              | 1200                            | 125                                    | 4200                                           | B59053-A90-A10  |
| A 53 | 110             | 960                             | 135                                    | 4200                                           | B59053-A110-A10 |
| A 53 | 130             | 840                             | 155                                    | 4200                                           | B59053-A130-A10 |
| A 53 | 150             | 700                             | 170                                    | 4200                                           | B59053-A150-A10 |
| A 53 | 180             | 530                             | 200                                    | 4200                                           | B59053-A180-A10 |
| A 53 | 220             | 640                             | 235                                    | 6000                                           | B59053-A220-A10 |
| A 53 | 270             | 530                             | 275                                    | 6000                                           | B59053-A270-A10 |

<sup>1)</sup> Valid for  $T_A < 25\text{ °C}$

<sup>2)</sup> Measured peak-to-peak

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

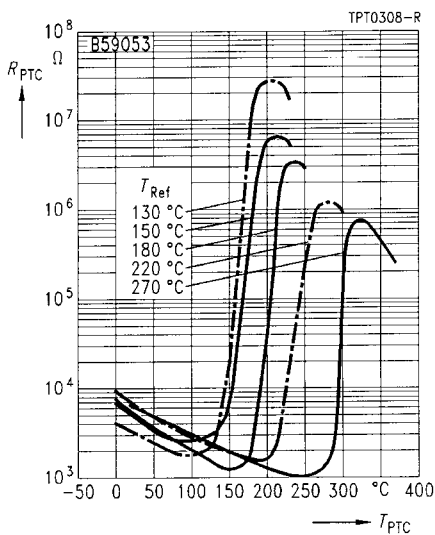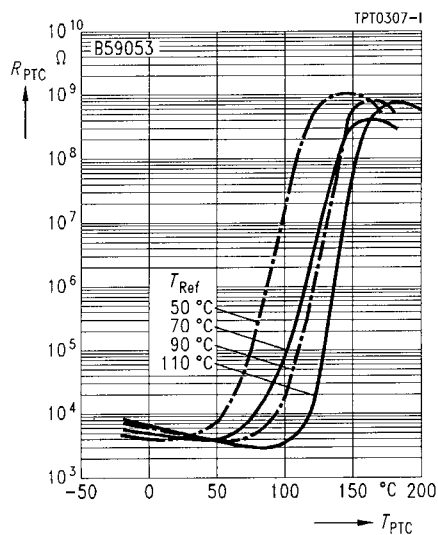


230 V

Applications

- Self-regulating heating element

Features

- Thermistor disk with aluminum metallization on front surfaces
- No migration effects
- Suitable for clamp-contacting
- Curvature < 0,2 mm



Dimensions (mm)

|                                         |                 |            |    |
|-----------------------------------------|-----------------|------------|----|
| Max. operating voltage                  | $V_{\max}$      | 265        | V  |
| Rated voltage                           | $V_N$           | 230        | V  |
| Operating temperature range ( $V = 0$ ) | $T_{\text{op}}$ | – 40/+ 200 | °C |
| ( $V = V_N$ )                           | $T_{\text{op}}$ | 0/60       | °C |
| Resistance tolerance                    | $\Delta R$      | ± 35 %     |    |



| Type | $V_D$<br>V | $T_{\text{Ref}}$<br>°C | $R_{\min}$<br>( $V = V_N$ )<br>Ω | $T_{\text{surf}}^{2)}$<br>( $V = V_N$ )<br>°C | $R_N$<br>( $V_{\text{Meas}} \leq 1,5 V$ )<br>Ω | Ordering code   |
|------|------------|------------------------|----------------------------------|-----------------------------------------------|------------------------------------------------|-----------------|
| A 66 | 400        | 50                     | 500 <sup>1)</sup>                | 100                                           | 1200                                           | B59066-A50-A10  |
| A 66 | 400        | 70                     | 400                              | 105                                           | 1200                                           | B59066-A70-A10  |
| A 66 | 400        | 90                     | 345                              | 125                                           | 1200                                           | B59066-A90-A10  |
| A 66 | 400        | 110                    | 275                              | 140                                           | 1200                                           | B59066-A110-A10 |
| A 66 | 400        | 130                    | 240                              | 160                                           | 1200                                           | B59066-A130-A10 |
| A 66 | 400        | 150                    | 200                              | 175                                           | 1200                                           | B59066-A150-A10 |
| A 66 | 400        | 180                    | 150                              | 200                                           | 1200                                           | B59066-A180-A10 |
| A 66 | 400        | 220                    | 180                              | 235                                           | 1700                                           | B59066-A220-A10 |
| A 66 | 340        | 270                    | 150                              | 280                                           | 1700                                           | B59066-A270-A10 |

<sup>1)</sup> Valid for  $T_A < 25\text{ °C}$

<sup>2)</sup> Measured peak-to-peak

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

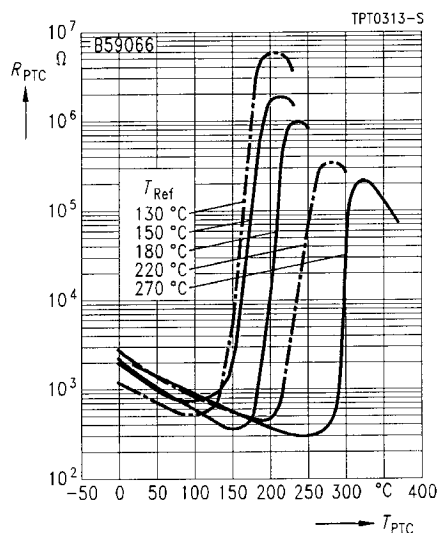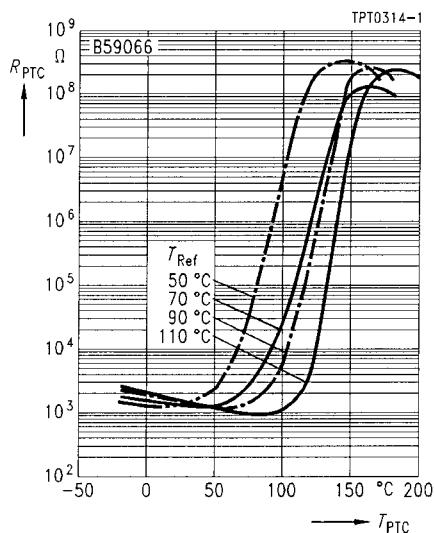

**230 V**

**Applications**


- Self-regulating heating element

**Features**

- Thermistor disk with aluminum metallization on front surfaces
- No migration effects
- Suitable for clamp-contacting
- Curvature < 0,05 mm

**Options**

Other dimensions available upon request



Termination

Dimensions (mm)

|                                         |            |            |    |
|-----------------------------------------|------------|------------|----|
| Max. operating voltage                  | $V_{max}$  | 265        | V  |
| Rated voltage                           | $V_N$      | 230        | V  |
| Operating temperature range ( $V = 0$ ) | $T_{op}$   | - 40/+ 200 | °C |
| ( $V = V_N$ )                           | $T_{op}$   | 0/60       | °C |
| Resistance tolerance                    | $\Delta R$ | ± 50 %     |    |



| Type  | $V_D$<br>V | $T_{Ref}$<br>°C | $R_{min}$<br>( $V = V_N$ )<br>Ω | $T_{surf}^{2)}$<br>( $V = V_N$ )<br>°C | $R_N$<br>( $V_{Meas} \leq 1,5 V$ )<br>Ω | Ordering code   |
|-------|------------|-----------------|---------------------------------|----------------------------------------|-----------------------------------------|-----------------|
| R 102 | 400        | 50              | 225 <sup>1)</sup>               | 105                                    | 700                                     | B59102-R50-A10  |
| R 102 | 400        | 70              | 180                             | 110                                    | 700                                     | B59102-R70-A10  |
| R 102 | 400        | 90              | 155                             | 130                                    | 700                                     | B59102-R90-A10  |
| R 102 | 400        | 110             | 125                             | 145                                    | 700                                     | B59102-R110-A10 |
| R 102 | 400        | 130             | 105                             | 160                                    | 700                                     | B59102-R130-A10 |
| R 102 | 400        | 150             | 90                              | 180                                    | 700                                     | B59102-R150-A10 |
| R 102 | 400        | 180             | 66                              | 210                                    | 700                                     | B59102-R180-A10 |
| R 102 | 400        | 220             | 80                              | 240                                    | 1000                                    | B59102-R220-A10 |
| R 102 | 400        | 240             | 75                              | 255                                    | 1000                                    | B59102-R240-A10 |
| R 102 | 340        | 270             | 85                              | 275                                    | 1300                                    | B59102-R270-A10 |
| R 102 | 320        | 290             | 78                              | 295                                    | 1300                                    | B59102-R290-A10 |

<sup>1)</sup> Valid for  $T_A < 25$  °C


<sup>2)</sup> Measured peak-to-peak

### Characteristics (typical)

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

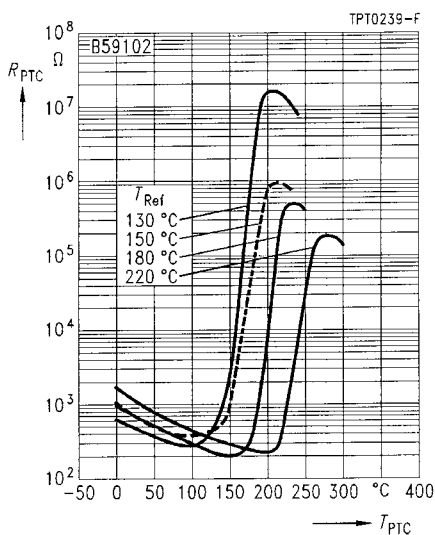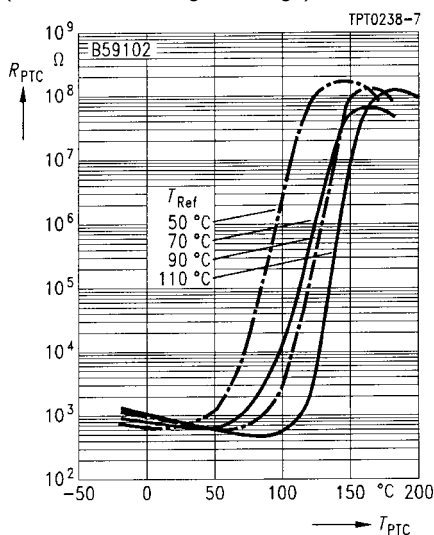

PTC resistance  $R_{PTC}$  versus PTC temperature  $T_{PTC}$   
(measured at low signal voltage)

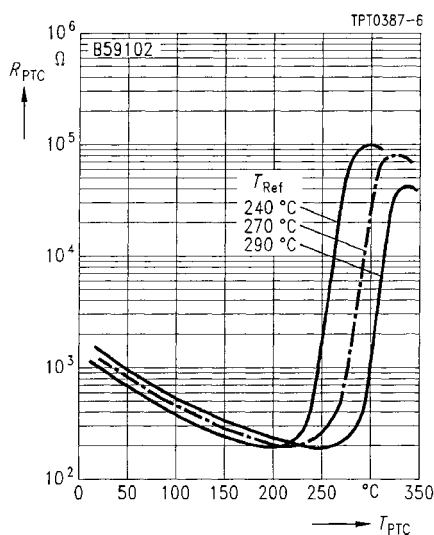



Siemens Matsushita Components

SAW resonators for radio  
remote control

## Making a lot of things a lot easier

The key to convenience and security: radio remote controls for keyless entry in automobiles and opening the garage gate. Or in the household, for cordless headphones or metering heating costs for example. Here the evaporation pipe is replaced by a sensor that signals consumption by



a transmitter to a receiver outside the domicile, thus doing away with readings on all the radiators. Transmitter and receiver are both fitted with a SAW resonator.

**SCS – dependable, fast and competent**





# Mounting Instructions

## 1 Soldering

### 1.1 Leaded PTC thermistors

Leaded PTC thermistors comply with the solderability requirements specified by CECC.

When soldering, care must be taken that the thermistors are not damaged by excessive heat. The following maximum temperatures, maximum time spans and minimum distances have to be observed:

|                          | <i>Dip soldering</i> | <i>Iron soldering</i> |
|--------------------------|----------------------|-----------------------|
| Bath temperature         | max. 260 °C          | max. 360 °C           |
| Soldering time           | max. 4 s             | max. 2 s              |
| Distance from thermistor | min. 6 mm            | min. 6 mm             |

Under more severe soldering conditions the resistance may change.

### 1.2 Leadless PTC thermistors

In case of PTC thermistors without leads, soldering is restricted to devices which are provided with a solderable metallization. The temperature shock caused by the application of hot solder may produce fine cracks in the ceramic, resulting in changes in resistance.

To prevent leaching of the metallization, solder with silver additives or with a low tin content should be used. In addition, soldering methods should be employed which permit short soldering times.

### 1.3 SMD PTC thermistors

The notes on soldering leadless thermistors also apply to the SMD versions (see IEC 68-2-58).

#### 1.3.1 Wettability test in accordance with IEC 68-2-20

Preconditioning: Immersion into flux F-SW 32.

Evaluation criterion: Wetting of soldering areas  $\geq 95\%$ .

|     | Termination | Solder           |                   | Bath temperature (°C) | Dwell time (s) |
|-----|-------------|------------------|-------------------|-----------------------|----------------|
| PTC | CrNiAg      | SnPb or<br>60/40 | SnPbAg<br>62/36/2 | 215 ± 3               | 4              |

# Mounting Instructions

## 1.3.2 Soldering heat resistance test in accordance with IEC 68-2-20

Preconditioning: Immersion into flux F-SW 32.

Evaluation criterion: Leaching of side edges  $\leq 1/3$ .

|     | Termination | Solder           |                   | Bath temperature (°C) | Dwell time (s) |
|-----|-------------|------------------|-------------------|-----------------------|----------------|
| PTC | CrNiAg      | SnPb or<br>60/40 | SnPbAg<br>62/36/2 | $260 \pm 5$           | 10             |


*Note:*

PTC thermistors in sizes 3225 and 4032 do not have metallized pads, but metal-strip terminations.

## 1.3.3 Recommended soldering temperature profiles


### *Vapor phase soldering*

Temperature/time diagram for vapor phase soldering, in-line system with preheating. The temperatures stated refer to the component terminals.

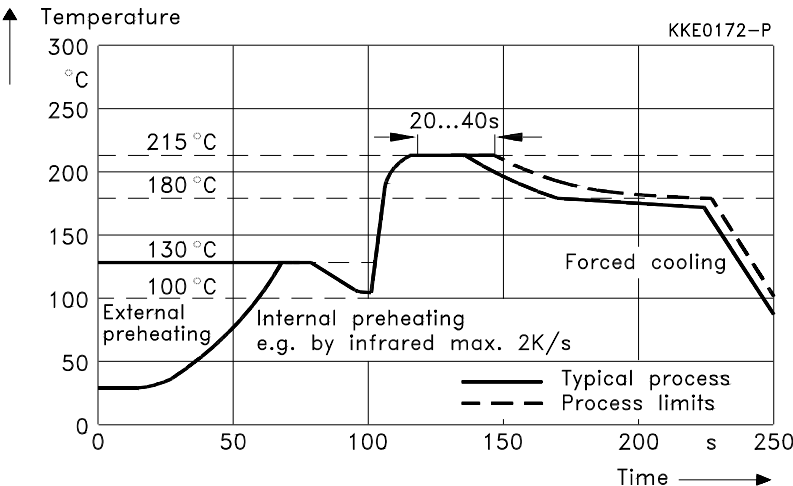


## Wave soldering

Temperature on the component terminals during dual wave soldering

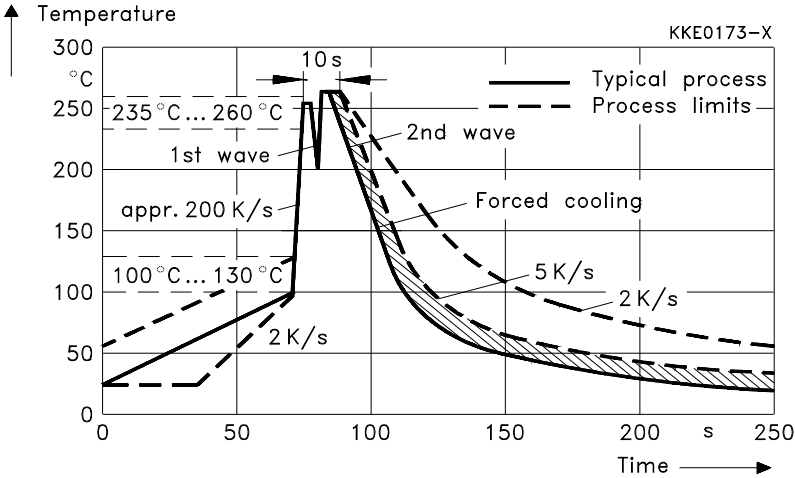

## Infrared soldering

Temperature on the component terminals during infrared soldering

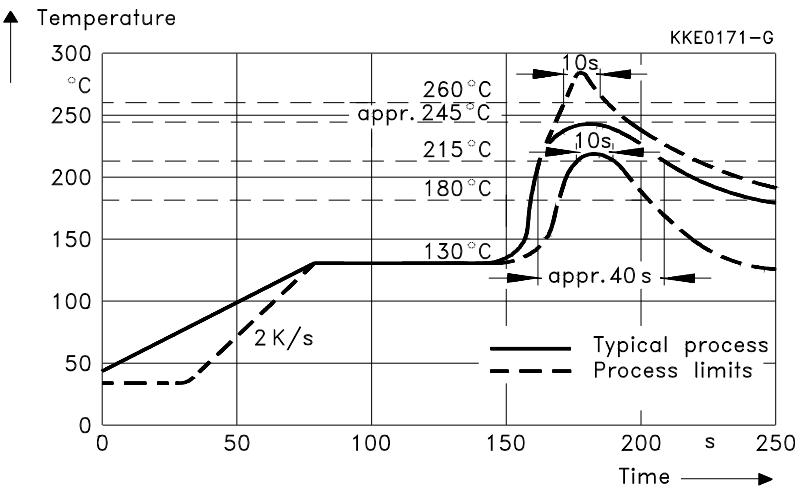

# Mounting Instructions

---

## 1.3.4 Notes:

- When soldering large components ( $\geq$  size1210) care must be taken that the temperature jump between preheating and soldering wave will not exceed 100 K.
- Iron soldering should be avoided, hot air methods are recommended for repair purposes.

## 2 Conductive adhesion

An alternative to soldering is the gluing of thermistors with conductive adhesives. The benefit of this method is that it involves no thermal stress. The adhesives used must be chemically inert.

## 3 Clamp contacting

Pressure contacting by means of clamps is particularly suitable for applications involving frequent switching and high turn-on powers. PTC thermistors for heating and motor starting have metallized surfaces for clamp contacting.

## 4 Robustness of terminations

The leads meet the requirements of IEC 68-2-21. They may not be bent closer than 4 mm from the solder joint on the thermistor body or from the point at which they leave the feed-throughs. During bending, any mechanical stress at the outlet of the leads must be removed. The bending radius should be at least 0,75 mm.

Tensile strength: Test Ua1:

Leads  $\varnothing \leq 0,5 \text{ mm} = 5 \text{ N}$   
 $\varnothing > 0,5 \text{ mm} = 10 \text{ N}$

Bending strength: Test Ub:

Two 90°-bends in opposite directions at a weight of 0,25 kg.

Torsional strength: Test Uc: severity 2

The lead is bent by 90° at a distance of 6 to 6,5 mm from the thermistor body.  
The bending radius of the leads should be approx. 0,75 mm. Two torsions of 180° each (severity 2).

When subjecting leads to mechanical stress, the following should be observed:

### *Tensile stress on leads*

During mounting and operation tensile forces on the leads are to be avoided.

### *Bending of leads*

Bending of the leads directly on the thermistor body is not permissible.

A lead may be bent at a minimum distance of twice the wire's diameter + 2 mm from the solder joint on the thermistor body. During bending the wire must be mechanically relieved at its outlet. The bending radius should be at least 0,75 mm.

### *Twisting of leads*

The twisting (torsion) by 180° of a lead bent by 90° is permissible at 6 mm from the bottom of the thermistor body.

### **5 Sealing and potting**

When thermistors are sealed or potted, there must be no mechanical stress through differing thermal expansion in the curing process and during later operation. In the curing process the upper category temperature of the thermistor must not be exceeded. It is also necessary to ensure that the potting compound is chemically neutral.

Sealing and potting compounds may reduce the titanate ceramic of PTC thermistors and lead to the formation of low-ohmic conduction bridges. In conjunction with a change in dissipation conditions due to the potting compound, local overheating may finally damage the thermistor.

### **6 Cleaning**

If cleaning is necessary, mild cleaning agents such as freon, trichloroethane and perchloroethylene are recommended. Ultrasonic cleaning methods are permissible.

### **7 Storage**

In order to maintain their solderability, thermistors must be stored in a non-corrosive atmosphere. Humidity, temperature and container materials are critical factors.

If possible, the components should be left in the original packing. Touching the metallization of unsoldered thermistors may change their soldering properties.



Siemens Matsushita Components

Ferrite inductors from SCS stock

## Transformation at its best


Not just one-off solutions but complete ones designed precisely to a requirements profile are more in demand than ever. So we are offering surface-mount transformers for power and broadband applications straight from SCS stock:

- ▶ **E 6,3** with small dimensions, low leakage inductance and high electric strength
- ▶ **ER 11** flat and with low leakage inductance
- ▶ **RM 4 LP** for high DC biasing
- ▶ **S interface transformer RM 5** for precise pulse transmission in ISDN terminals
- ▶ **U interface transformer RM 6** for ISDN applications
- ▶ **Planar inductor RM 7** with high power density and extremely flat for DC/DC applications

SCS – dependable, fast and competent



1 Manufacturing process and quality assurance

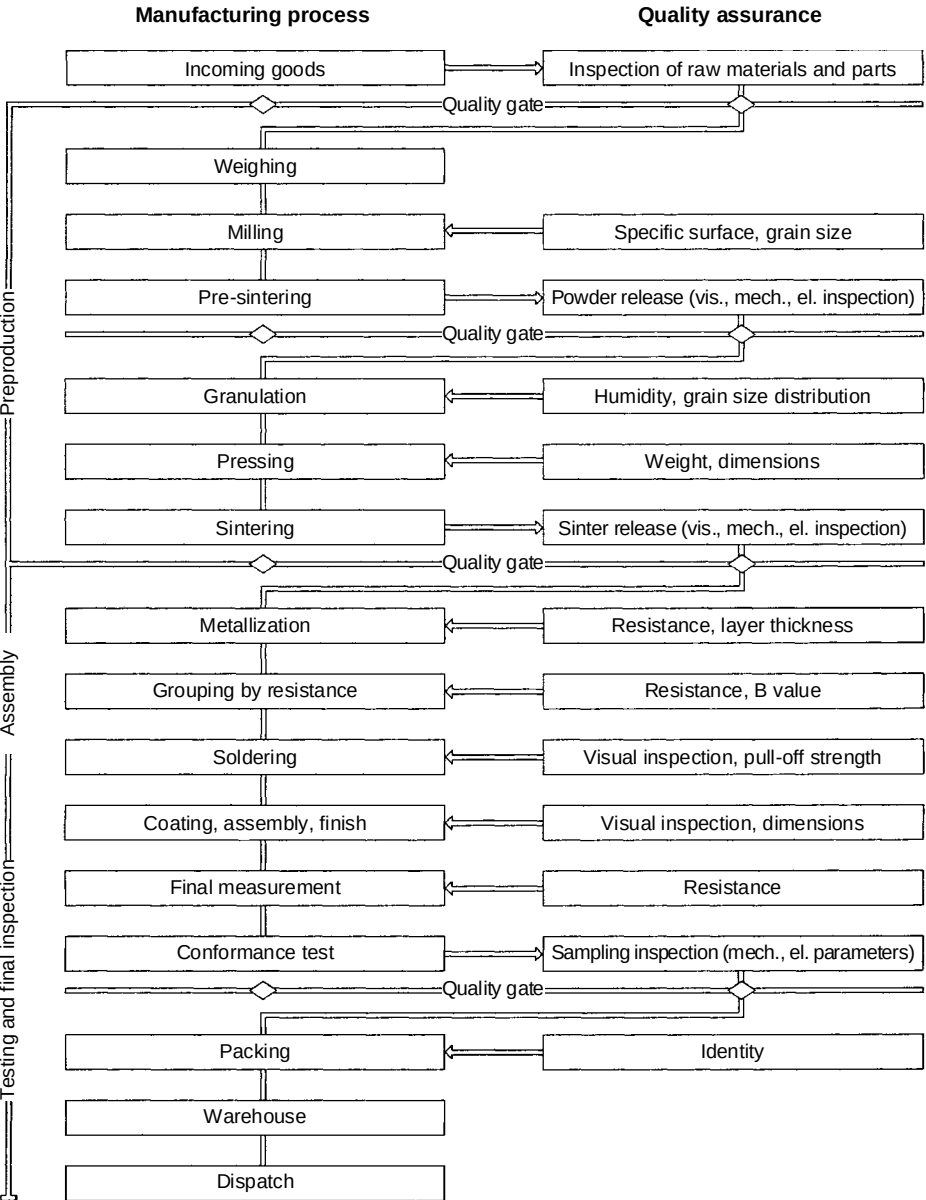

## 2 General

S + M has set up extensive quality assurance systems in order to meet the stringent technical demands of an open world market. These systems follow the CECC ISO-9000 to ISO-9004 standards. Our QA system received the ISO 9001 certificate in September 1991.

## 3 Sequence of quality assurance measures

The quality department tested and released the PTC thermistors described in this data book on the basis of the following criteria: compliance with type specifications, process capability of production equipment as well as accuracy of measuring and test methods and equipment.

To ensure a constantly high quality level, the following tests are carried out:

### 3.1 Incoming inspection

The parts and materials required for production are checked for dimensional accuracy and material properties in a prescribed sequence.

### 3.2 Process assurance

To achieve the objective of eliminating defects as efficiently as possible and at their very source, quite different measures are taken. Modern quality tools such as FMEA (Failure Mode and Effect Analysis) are used already during the starting phase: A risk-priority figure is assigned to *potential* defects according to their significance as well as to the probability of occurrence and detection. In case of high risk-priority figures, remedial measures are taken from the beginning. During production all essential processes are subject to statistical process control (SPC).

### 3.3 Product assurance

Each manufacturing stage is followed by a so-called "quality control gate", i.e. the product is only released for the next stage after passing a corresponding test. The test results are constantly monitored and evaluated and are then used to assess the quality of the manufacturing process itself (refer to 3.2).

### 3.4 Final inspection

During final inspection, specification-based parameters are checked in conformance tests.

## 4 Delivery quality

The term delivery quality designates the conformance with agreed data at the time of delivery.



## 5 Sampling inspection

The customer may carry out incoming inspections which are subject to standardized sampling inspection plans specifying the acceptance or rejection of a delivery lot in conjunction with agreed AQL values (AQL = acceptable quality level).

The scope and the maximum permissible number of defects of a sampling inspection are specified in IEC 410 (identical with MIL-STD 105 D and DIN ISO 2859-1), single sampling plan for normal inspection, inspection level II. The sampling instructions of this standard are such that a delivered lot will be accepted with a high degree of probability (greater than 90 %), if the percentage of defectives does not exceed the specified AQL level.

Generally, the average defect percentage of our deliveries lies clearly below the AQL value. This is ensured by appropriate quality assurance measures in the manufacturing plants and substantiated by the final inspections.

## 6 Classification of defects

A component is considered defective if it does not comply with the specifications stated in the data sheets or in an agreed delivery specification. Defects which generally exclude the functional use of the component (inoperatives) are classified separately from less significant defects.

**Inoperatives** of thermistors are:

- Short circuit or open circuit
- Component, case, terminals or encapsulation broken
- Incorrect marking
- Mixing of different types

**Other defects** are:

- Electrical defects (maximum ratings are exceeded)
- Mechanical defects, e. g. incorrect dimensions, damaged housings, illegible marking, twisted leads

## 7 AQL values

The following AQL values apply to the quoted defects

- |                                                 |       |
|-------------------------------------------------|-------|
| – for inoperatives (electrical and mechanical)  | 0,065 |
| – for the total number of electrical defectives | 0,250 |
| – for the total number of mechanical defectives | 0,250 |

The values for the total number of defectives include related inoperatives.

## 8 Incoming inspection by the customer

The quality of our products is ensured by the QA measures assigned to the individual production stages as shown [on page 167](#). Thus the customer can do away with cost-intensive incoming inspections. If a customer wishes nevertheless to carry out an incoming inspection, we recommend that the inspection plan shown below is used. The inspection methods employed must in this case be agreed upon between customer and supplier. In many cases a stricter inspection method is agreed upon to the effect that the sample size corresponds to the plan, the required inspection, however, demands "zero defects", i. e. a lot will only be accepted if the samples are free from defects. Regardless of that, all sample tests carried out at S+M are subject to these stricter test conditions (zero defects).

The following information is required for the assessment of possible claims: test circuit, sample size, number of defectives found, sample defectives and packing slip, delivery note number, lot number and/or label.

### *Sampling plan for normal inspection – inspection level II*

in accordance with DIN 40 080 (contents correspond to MIL Std 105 LD and IEC 410)

| Sampling inspection plan |         | AQL 0,065  | AQL 0,100  | AQL 0,250 | AQL 0,400 |
|--------------------------|---------|------------|------------|-----------|-----------|
| N = Lot size             |         |            |            |           |           |
| 2 ...                    | 50      | N          | N          | N         | N or 32-0 |
| 51 ...                   | 90      | N          | N          | 50-0      | 32-0      |
| 91 ...                   | 150     | N          | N or 125-0 | 50-0      | 32-0      |
| 151 ...                  | 280     | N or 200-0 | 125-0      | 50-0      | 32-0      |
| 281 ...                  | 500     | 200-0      | 125-0      | 50-0      | 32-0      |
| 501 ...                  | 1 200   | 200-0      | 125-0      | 50-0      | 125-1     |
| 1 201 ...                | 3 200   | 200-0      | 125-0      | 200-1     | 125-1     |
| 3 201 ...                | 10 000  | 200-0      | 125-0      | 200-1     | 200-2     |
| 10 001 ...               | 35 000  | 200-0      | 500-1      | 315-2     | 315-3     |
| 35 001 ...               | 150 000 | 800-1      | 500-1      | 500-3     | 500-5     |
| 150 001 ...              | 500 000 | 800-1      | 800-2      | 800-5     | 800-7     |
| >                        | 500 000 | 1250-2     | 1250-3     | 1250-7    | 1250-10   |

Columns 2 to 5: Left figure = sample size  
Right figure = permissible defects

### *Additional condition:*

As an acceptance number of 0 and a rejection number of 1 provides only limited information on the actual AQL, the next higher sample size should be taken.

## 9 Reliability

We conduct a large variety of endurance trials and environmental tests to assure the reliability of PTC thermistors. These tests derive from the extremes of expected application conditions, with extra tightening of the conditions so that significant results can be obtained within a reasonable amount of time.

The reliability testing programs of S + M are based on the test plans of relevant CECC standards for assessing the quality of electronic components. Environmental tests are conducted according to IEC 68-2 (Electrical Engineering, Basic Environmental Testing Procedures).

S + M performs reliability tests both in qualifying new component families as well as for periodic requalification. Reliability figures for various component series can be found in the data sheets.

## 10 Identification and retraceability

On the packaging of all shipped thermistors you will find a bar code label stating type, part number, quantity, date of manufacture and lot number. These details are necessary for speedy and informative handling of returns.

This systematic and unmistakable form of identification means that each component can be traced to a certain production lot. This in turn permits retracing back through the entire fabrication process as far as raw materials purchasing.

*Example:*

**S+M COMPONENTS**

**(X): 94645626**

**KALTLEITER** **3X2,5** **GURT**

**Type** → **S 1890-B 120-A 54**

**Part number** → **(L): B59890-S1120-B 54**

**Quantity** → **(Q): 01500**

**LOS-NR : 4711** ← **Lot number**

**(D): 93033** ← **Date of manufacture:**

**YYCWD**  
 YY ... Year  
 CW ... Calendar week  
 D ... Day  
 e. g. 1 ≙ Monday

**TAL0052-K** **MADE IN AUSTRIA**

## **11      Supplementary information**

The issuing of quality data – which always relate to a large number of components – is no assurance of characteristics in a legal sense. But an agreement on such data does not exclude the customer's right to claim replacement of individual defective PTC thermistors within the terms of delivery. We cannot assume any further liability, especially for the consequences of component failure.

You should also remember that figures for failure rate refer to an average fabrication situation and are therefore to be understood as mean values (statistical expectations) for a large number of delivery lots of homogeneous PTC thermistors. They are based on application experience as well as on data derived from preceding inspection under normal or – for the purpose of acceleration – tightened conditions.

## Environmental Protection Measures

---

Siemens Matsushita Components GmbH & Co. KG (S + M Components for short) is responsible for protection of the environment in the development, fabrication and use of its products for the intended purpose. S + M Components is very thorough in fulfilling the resulting obligations. Over and above the legal prescriptions, our guiding principle here is the corporation's responsibility towards man and environment.

Responsibility for safety in working with materials that have a potential environmental impact is in the hands of the various managers. This involves, in the first place, instructing and informing the staff concerned. A specially trained environmental protection supervisor watches over adherence to regulations, reports on the introduction of processes within an environmental context and on decisions relating to investment (e.g. he checks that all environmentally associated requirements like filters and sumps have been considered). But advising and informing staff take on the highest priority; this is the only way to ensure that all protective measures are known and observed.

All chemicals employed in development and fabrication are examined for environmental compatibility or harmful effects *before* their use on the basis of DIN safety specifications. Alternatives are devised if risks emerge. The result of this procedure is that today all CFCs as well as all highly toxic materials have been eliminated entirely from the fabrication process.

Dust and vapor generated during fabrication are filtered away for disposal. The emission figures of the filters are constantly examined; considerable efforts are undertaken to ensure that these figures are well below the legally prescribed limits. The same applies to the water used in a plant. This being cleansed in a special waste-water treatment process. Water consumption has been reduced substantially in recent years through the use of cooling water circuits and water recycling.

Waste produced in the fabrication of components is sorted and collected on the spot and recycled by state-of-the-art methods.

The packaging material used for our components can be fully recycled.

All thermistors can be disposed of on a dump for industrial waste that is similar to household refuse without any special precautions.

Of course, we are still by no means satisfied with what we have already achieved, and more steps are due to follow in the interest of further reducing and ultimately eliminating entirely all environmental impact created in the development and fabrication of our components.



Siemens Matsushita Components

Disk varistors from stock

# The choice is yours

In our selection of disk varistors there's something for everything. We offer you application support and deliver models rated from 11 to 460 V straight from SCS stock. Our product certification like UL and CECC makes sure your product conforms with CE. All disk varistors are manufactured in Europe, just like our block, strap and SMD varistors.



SCS – dependable, fast and competent



## Climatic Conditions

---

### 1 Reliability data

For most measuring PTCs reliability data are given in the data sheets. These data provide information on the deviation of rated resistance under high thermal, electrical or mechanical stress.

### 2 Operating temperature range

The permissible operating temperature ranges are specified in the data sheets. Here, a difference is made between the permissible temperature ranges for loaded and for unloaded PTC thermistors.

For unloaded PTC thermistors the operating temperatures indicated are identical with the surface temperature of the device. The operating temperature ranges for  $V = 0$  correspond to the lower category temperature LCT and the upper category temperature UCT as per CECC 44 000. Under load the power dissipation of a PTC thermistor depends on the heat removal conditions. To prevent electrical overload the temperature has to be kept within the specified range.



Siemens Matsushita Components

Now twice as many

## 2,000 PTC thermistors at once

A hot tip in PTCs for overload protection: our new maximum order level of 2,000 pieces. And with more than 50 different models, we've got a lot more to offer too. Maximum operating voltages from 12 to 550 V, rated currents up to 2.5 A, maximum switching currents of 15 A, plus a broad selection of leaded versions and SMDs.



SCS – dependable, fast and competent






## Taping and Packing

Many of the components presented in this data book are suitable for processing on automatic insertion or placement machines. These thermistors can be supplied on tape for easy handling by automatic systems. The individual modes of taping and packing will be described in the following.

### 1 Taping of SMD thermistors (in accordance with IEC 286-3)

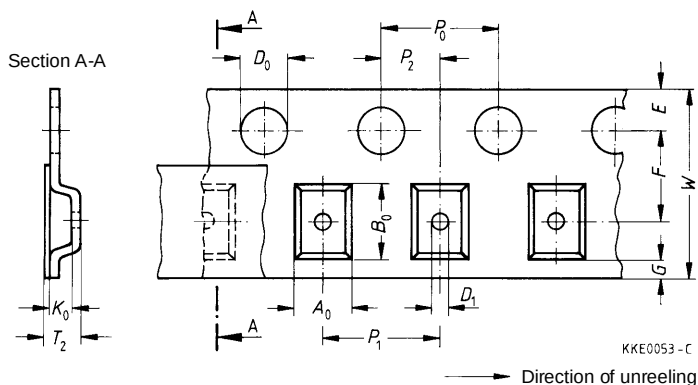


| Dimension<br>(mm) | Size<br>(8-mm tape)                                                                                                                                                                                    |      | Size<br>(16-mm tape) |      | Tolerance         |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------------|------|-------------------|
|                   | 0805                                                                                                                                                                                                   | 1210 | 3225                 | 4032 |                   |
| $A_0 \times B_0$  | The rated dimensions of the component compartment have been derived from the relevant component specification and are chosen such that the components cannot change their orientation within the tape. |      |                      |      |                   |
| $K_0$             |                                                                                                                                                                                                        |      |                      |      |                   |
| $T_2$             |                                                                                                                                                                                                        |      |                      |      |                   |
| $D_0$             | 1,50                                                                                                                                                                                                   |      | 1,50                 |      | + 0,10 / – 0 min. |
| $D_1$             | 1,00                                                                                                                                                                                                   |      | 1,50                 |      |                   |
| $P_0$             | 4,00                                                                                                                                                                                                   |      | 4,00                 |      | $\pm 0,10^{1)}$   |
| $P_2$             | 2,00                                                                                                                                                                                                   |      | 2,00                 |      | $\pm 0,05$        |
| $P_1$             | 4,00                                                                                                                                                                                                   |      | 12,00                |      | $\pm 0,10$        |
| $W$               | 8,00                                                                                                                                                                                                   |      | 16,00                |      | $\pm 0,30$        |
| $E$               | 1,75                                                                                                                                                                                                   |      | 1,75                 |      | $\pm 0,10$        |
| $F$               | 3,50                                                                                                                                                                                                   |      | 7,50 <sup>2)</sup>   |      | $\pm 0,05$        |
| $G$               | 0,75                                                                                                                                                                                                   |      | 0,75                 |      | min.              |

<sup>1)</sup>  $\leq 0,2$  mm over 10 sprocket holes

<sup>2)</sup> Tolerance  $\pm 0,1$

# Taping and Packing

## Reel packing

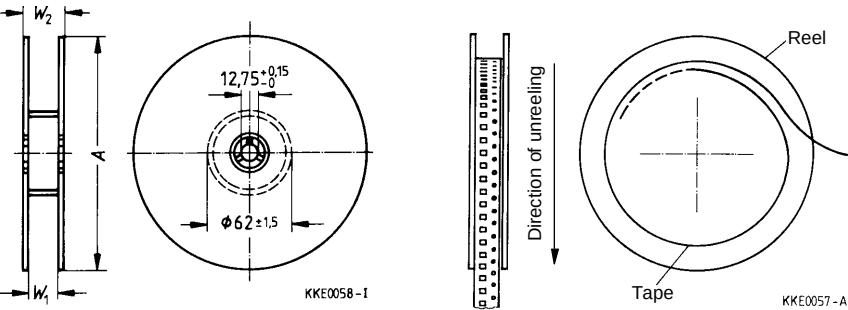

**8-mm tape**  
(for sizes 0805, 1210)


| Dimension      | 180-mm reel   |
|----------------|---------------|
| A              | 180 – 2/+ 0   |
| W <sub>1</sub> | 8,4 + 1,5/– 0 |
| W <sub>2</sub> | 14,4 max.     |

**16-mm tape**  
(for sizes 3225, 4032)

| Dimension      | 330-mm reel    |
|----------------|----------------|
| A              | 330 – 2/+ 0    |
| W <sub>1</sub> | 16,4 + 2,0/– 0 |
| W <sub>2</sub> | 22,4 max.      |

## 2 Taping of radial-lead PTC thermistors

Dimensions and tolerances (taping in accordance with IEC 286-2)

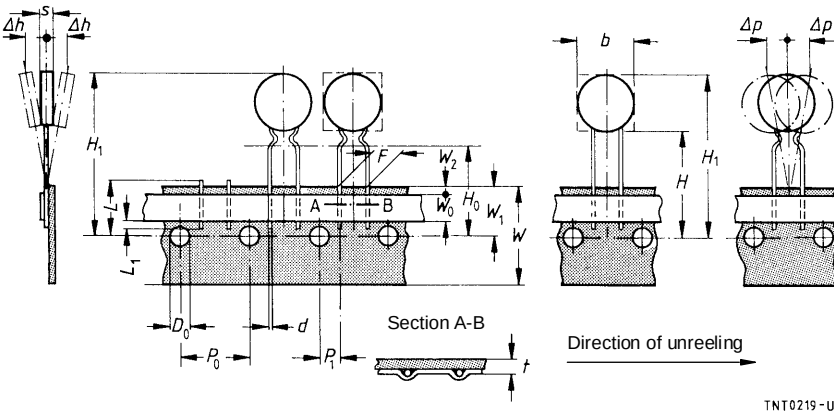


| Dimension<br>(mm) | Lead spacing |         | Tolerance of<br>LS 2,54/5,08 | Remarks                                        |
|-------------------|--------------|---------|------------------------------|------------------------------------------------|
|                   | 2,54 mm      | 5,08 mm |                              |                                                |
| $b$               | 11,0         | 11,5    | max.                         |                                                |
| $s$               | 5,0          | 6,0     | max.                         |                                                |
| $d$               | 0,5/0,6      | 0,5/0,6 | $\pm 0,05$                   |                                                |
| $P_0$             | 12,7         | 12,7    | $\pm 0,2$                    | $\pm 1 \text{ mm} / 20 \text{ sprocket holes}$ |
| $P_1$             | 5,08         | 3,81    | $\pm 0,7$                    |                                                |
| $F$               | 2,54         | 5,08    | $+ 0,6/- 0,1$                |                                                |
| $\Delta h$        | 0            | 0       | $\pm 2,0$                    | measured at top of component body              |
| $\Delta p$        | 0            | 0       | $\pm 1,3$                    |                                                |
| $W$               | 18,0         | 18,0    | $\pm 0,5$                    |                                                |
| $W_0$             | 5,5          | 5,5     | min.                         | peel-off force $\geq 5 \text{ N}$              |
| $W_1$             | 9,0          | 9,0     | $\pm 0,5$                    |                                                |
| $W_2$             | 2,0          | 2,0     | max.                         |                                                |
| $H$               | 18,0         | 18,0    | $+ 2,0/- 0$                  |                                                |
| $H_0$             | 16,0         | 16,0    | $\pm 0,5$                    |                                                |
| $H_1$             | 32,2         | 32,2    | max.                         |                                                |
| $D_0$             | 4,0          | 4,0     | $\pm 0,2$                    |                                                |
| $t$               | 0,9          | 0,9     | max.                         | without wires                                  |
| $L$               | 11,0         | 11,0    | max.                         |                                                |
| $L_1$             | 4,0          | 4,0     | max.                         |                                                |

\*) Depends on  $s$

# Taping and Packing


## Modes of packing

### AMMO packing

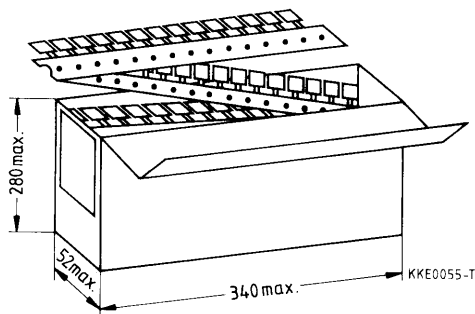


Number of pieces: 1000 ... 2000

### Reel packing

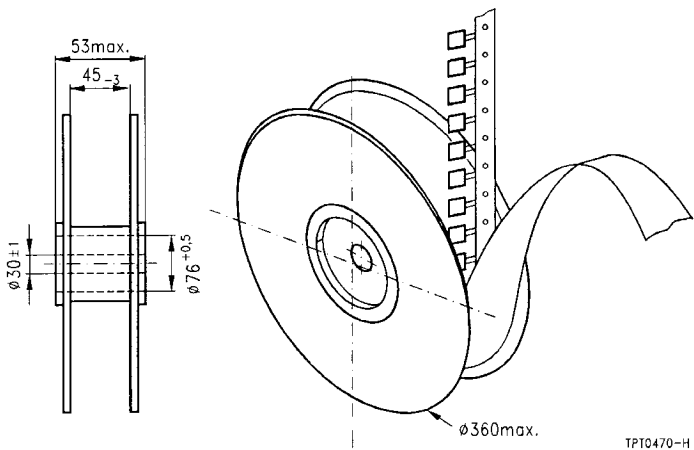

Number of pieces: 1000 ... 2000

### *Cassette packing*

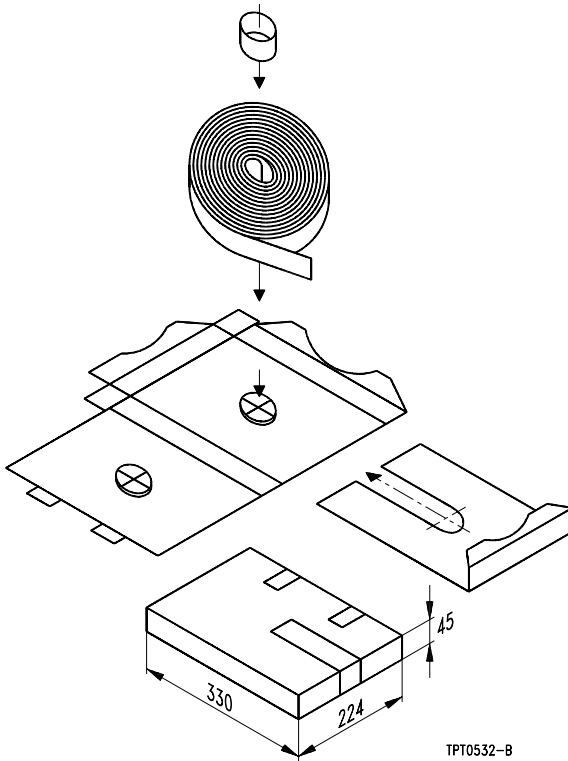

Number of pieces: 1000 ... 2000

---

### 3      **Packing codes**

The last two digits of the complete ordering code state the packing mode:

|                        |                        |         |                  |
|------------------------|------------------------|---------|------------------|
| 40                     |                        | Bulk    |                  |
| 50                     | Radial leads, kinked   | Tape    | Cassette packing |
| 51                     | Radial leads, kinked   | Tape    | Reel packing     |
| 52                     | Radial leads, straight | Tape    | Cassette packing |
| 53                     | Radial leads, straight | Tape    | Reel packing     |
| 54                     | Radial leads, kinked   | Tape    | AMMO packing     |
| 55                     | Radial leads, straight | Tape    | AMMO packing     |
| 62                     | SMDs                   | Tape    | Reel packing     |
| 70                     | Radial leads           | Bulk    | Cardboard strips |
| Example: B57164-K102-M |                        | Untaped |                  |
| B57164-K102-M52        |                        | Taped   |                  |

## Symbols and Terms

|                 |                                                                     |
|-----------------|---------------------------------------------------------------------|
| $A$             | Area                                                                |
| $C_{th}$        | Heat capacity                                                       |
| $I$             | Current                                                             |
| $I_{in/coil}$   | Inrush current through degaussing coil                              |
| $I_N$           | Rated current                                                       |
| $I_K$           | Trip current                                                        |
| $I_r$           | Residual current                                                    |
| $I_{rms}$       | Root-mean-square value of current                                   |
| $I_S$           | Switching current                                                   |
| $N$             | Number (integer)                                                    |
| $P$             | Power                                                               |
| $P_{25}$        | Maximum power at 25 °C                                              |
| $P_{el}$        | Electrical power                                                    |
| $P_V$           | Dissipation power                                                   |
| $R_{min}$       | Minimum resistance                                                  |
| $R_N$           | Rated resistance                                                    |
| $\Delta R_N$    | Resistance tolerance                                                |
| $R_P$           | Parallel resistance                                                 |
| $R_{PTC}$       | PTC resistance                                                      |
| $R_{Ref}$       | Reference resistance                                                |
| $R_S$           | Series resistance                                                   |
| $R_T$           | Resistance at temperature $T$ (e.g. $R_{25}$ = resistance at 25 °C) |
| $R_V$           | Load resistance                                                     |
| $T$             | Temperature                                                         |
| $t$             | Time                                                                |
| $T_A$           | Ambient temperature                                                 |
| $t_a$           | Thermal threshold time                                              |
| $t_E$           | Settling time (for level sensors)                                   |
| $T_N$           | Rated temperature                                                   |
| $T_{NAT}$       | Nominal threshold temperature                                       |
| $T_{op}$        | Operating temperature                                               |
| $T_{PTC}$       | PTC temperature                                                     |
| $t_R$           | Response time                                                       |
| $T_{Ref}$       | Reference temperature                                               |
| $T_{Rmin}$      | Temperature at minimum resistance                                   |
| $t_S$           | Switching time                                                      |
| $T_{surf}$      | Surface temperature                                                 |
| $V$ or $V_{el}$ | Voltage (with subscript only for distinction from volume)           |
| $V$             | Volume                                                              |

## Symbols and Terms

---

|                |                                      |
|----------------|--------------------------------------|
| $V_{rms}$      | Root-mean-square value of voltage    |
| $V_D$          | Breakdown voltage                    |
| $V_{is}$       | Insulation test voltage              |
| $V_{max}$      | Maximum operating voltage            |
| $V_{Meas}$     | Measuring voltage                    |
| $V_{Meas,max}$ | Maximum measuring voltage            |
| $V_N$          | Rated voltage                        |
| $V_{op}$       | Operating voltage                    |
| $V_{PTC}$      | Voltage drop across a PTC thermistor |
| $V_p$          | Pulse strength                       |
| $\alpha$       | Temperature coefficient              |
| $\Delta$       | Tolerance, change                    |
| $\delta_{th}$  | Dissipation factor                   |
| $\tau_a$       | Thermal time constant                |
| $\tau_c$       | Thermal cooling time constant        |
| $\lambda$      | Failure rate                         |

### Abbreviations / Notes



Surface-mount devices

\* To be replaced by a number in ordering codes, type designations etc.

+ To be replaced by a letter

All dimensions are given in mm.

The commas used in numerical values denote decimal points.



# Subject Index

## A

ambient temperature 28

## B

breakdown voltage  $V_D$  24

## C

ceramic material 19  
 clamp contacting 40, 164  
 cleaning 165  
 conductive adhesion 164  
 current/voltage characteristic 23

## D

decay time 25  
 defects 169  
 degaussing 37  
 directly heated 29

## E

energy-saving lamps 35, 36

## F

frequency dependence 27  
 fuses 29

## G

grain boundaries 19

## H

heat dissipation 28  
 heating elements 40

## I

impedance 27  
 indirectly heated 29  
 insulation test voltage  $V_{is}$  25

## L

leakage sensing 39  
 level sensors 38  
 limit indication 39

## M

maximum measuring voltage  $V_{Meas,max}$  24  
 maximum operating voltage  $V_{max}$  24  
 media 39  
 minimum resistance  $R_{min}$  21  
 motor starting 37

## N

nominal threshold temperature  $T_{NAT}$  22

## O

operating point 28  
 operating states 30  
 overflow control 38  
 overload protection 29

## P

peak voltage 25  
 potting 165  
 PTC thermistor 19  
 PTC thermistor effect 19  
 PTC volume 31  
 pulse strength  $V_p$  25

## Q

quality assurance 167

## R

rated current  $I_N$  24  
 rated resistance  $R_N$  21  
 rated voltage  $V_N$  24  
 reference resistance  $R_{Ref}$  21  
 reference temperature  $T_{Ref}$  21  
 residual current  $I_r$  24  
 resistance  $R_{PTC}$  22  
 response time  $t_R$  25  
 rise time 25  
 robustness of terminations 164

## S

sealing 165  
 self-heating 20, 22  
 settling time  $t_E$  26  
 soldering 161

# Subject Index

---

|                                                 |        |                                      |    |
|-------------------------------------------------|--------|--------------------------------------|----|
| storage                                         | 165    | <b>V</b>                             |    |
| surface temperature $T_{\text{surf}}$           | 23     | varistor effect                      | 26 |
| switching current $I_{\text{S}}$                | 24     | voltage dependence                   | 26 |
| switching time $t_{\text{S}}$                   | 24, 32 | <b>Z</b>                             |    |
| <b>T</b>                                        |        | zero-power characteristics           | 20 |
| telephone line card protection                  | 34     | zero-power resistance $R_{\text{T}}$ | 20 |
| temperature coefficient $\alpha$                | 22     |                                      |    |
| temperature dependence                          | 20     |                                      |    |
| temperature sensors                             | 39     |                                      |    |
| temperature $T_{\text{PTC}}$                    | 22     |                                      |    |
| thermal cooling time constant $\tau_{\text{c}}$ | 25     |                                      |    |
| thermal threshold time $t_{\text{a}}$           | 25     |                                      |    |
| time delay                                      | 35     |                                      |    |
| transformer protection                          | 34     |                                      |    |
| trip current $I_{\text{K}}$                     | 23, 30 |                                      |    |
| trip temperature                                | 39     |                                      |    |