

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

NOTES:

1. Specifications:

- . Contact Resistance: 20mΩ max.
- . Insulation Resistance: 1000MΩ min.
- . Current Rating: 2A.
- . Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
- . Operating Temperature: -40°C to +105°C
- . Recommend Wave Soldering Temperature: 260°C,5-10s.




2. Materials:

- . Contact: Copper alloy
- . Housing: Thermoplastic(UL94 V-0)



3. Product Number code:

DS1118 - X X X X X X

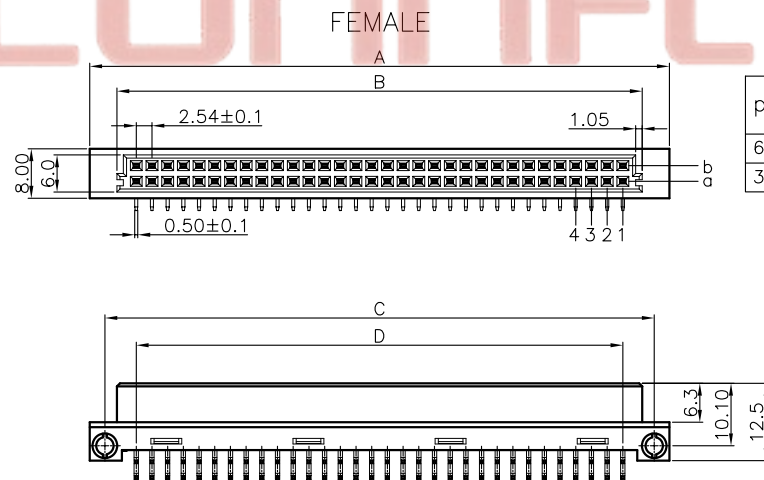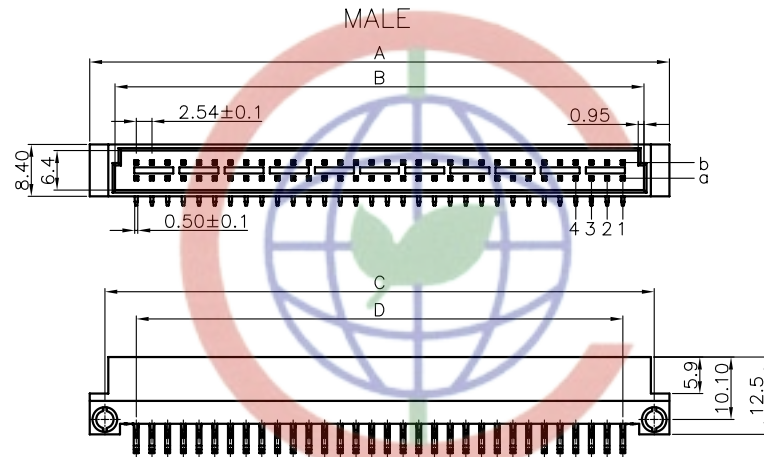- Column with Contacts type
 - 1: 1-3 type
 - 2: 2-4 type
 - 3: 1-2-3 type
- Rows with Contacts type
 - 1: a type(1 rows with contact)
 - 2: ab type(2 row with contact)
- Mounting type
 - R: right angle type
- Contact plating
 - 6: full Tin plating
 - 0: selective gold flash
 - C: selective 3u" gold
 - 1: selective 10u" gold
- Connector type
 - M: male
 - F: female
- No.of contacts
 - 64 32
- Series No.
 - DS1118



positions	A	B		C	D
		Female	Male		
64P(2*32)	93.8	85.0	85.6	88.9	78.74
32P(2*16)	53.26	44.26	44.7	48.26	38.10

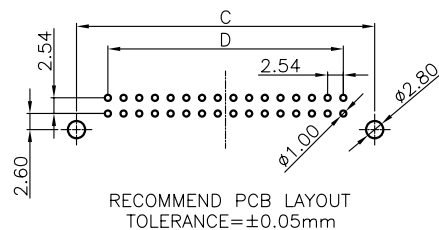

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		DIN 41612 B TYPE(2ROWS)		
X.	±0.60	X.	±5°	UNITS	mm			Right Angle		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1118 SERIES			
.XX	±0.25	.XX	±2°	 晨翔电子有限公司						
DRAWING TYPE		CUSTOMER								
SCALE		1:1	SHEET							1 OF 3
DRAWING NO.		C-DS1118-XXXXRXX								
				CONNFLY CONNFLY ELECTRONIC CO. LTD						



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

NOTES:

1. Specifications:

- . Contact Resistance: 20mΩ max.
- . Insulation Resistance: 1000MΩ min.
- . Current Rating: 2A.
- . Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
- . Operating Temperature: -40°C to +105°C
- . Recommend Wave Soldering Temperature: 260°C,5-10s.

2. Materials:

- . Contact: Copper alloy
- . Housing: Thermoplastic(UL94 V-0)

3. Product Number code:

DS1118 - X X X X X X

Column with Contacts type
1: 1-3 type
2: 2-4 type
3: 1-2-3 type

Rows with Contacts type
1: a type(1 rows with contact)
2: ab type(2 row with contact)

Mounting type
V: Vertical type

Contact plating
6: full Tin plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold

Connector type
M: male F: female

No. of contacts
64 32

Series No.
DS1118



positions	A	B	C		D
			Female	Male	
64P(2*32)	94.9	90.0	85.0	85.6	78.74
32P(2*16)	54.9	50.0	44.26	44.7	38.10

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

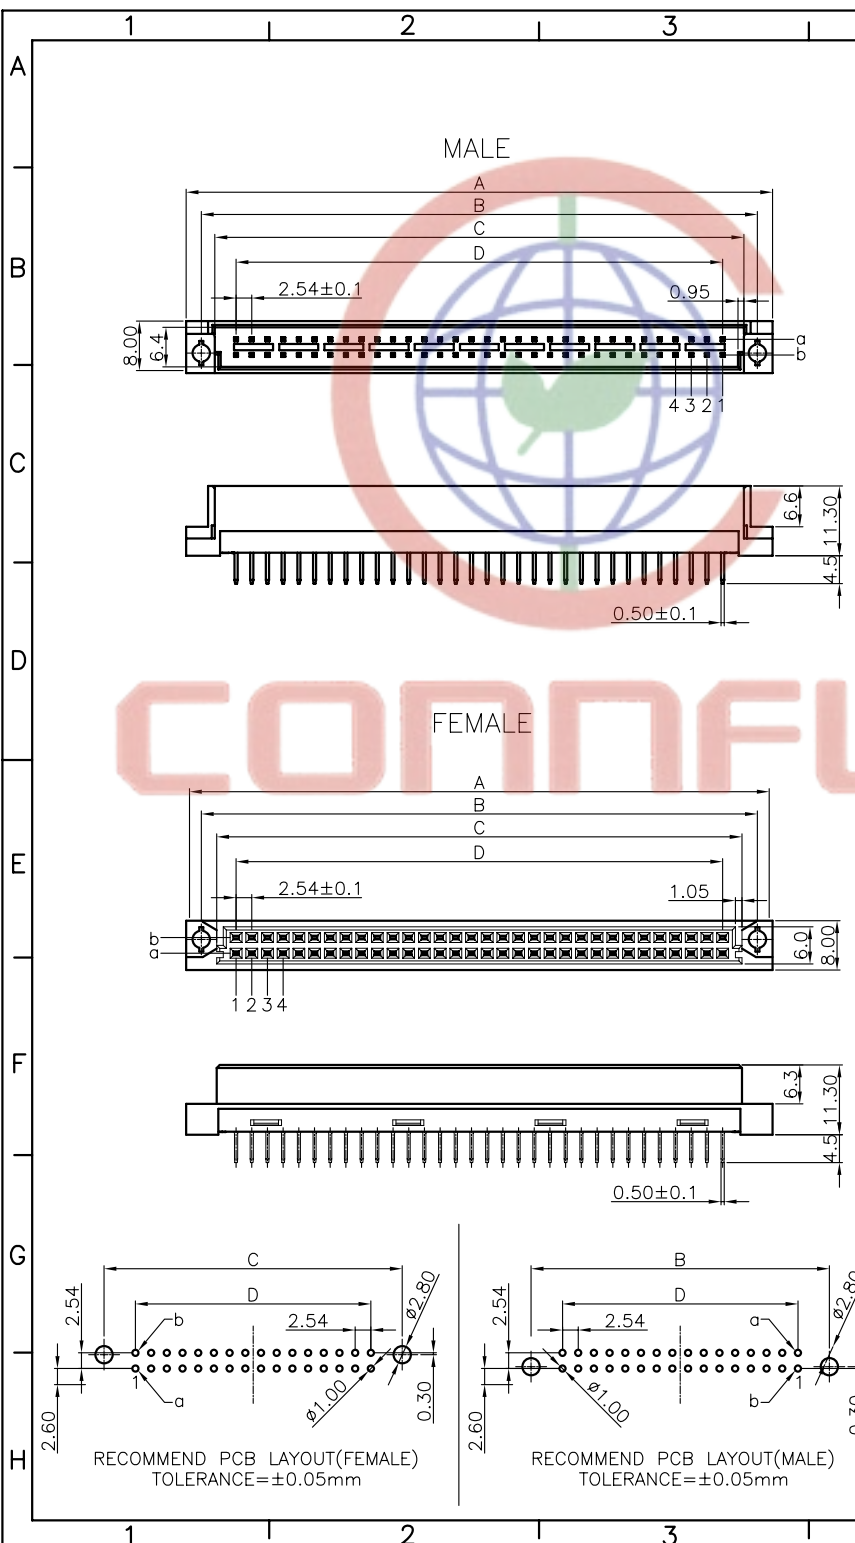Http://www.connfly.com









GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIN 41612 B TYPE(2ROWS) Vertical Through	
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1118 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 2 OF 3				
DRAWING NO.		C-DS1118-XXXXVXX					









晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

Reference to female R/A type				
Pitch	Position	Row with conntacts	column with conntacts	Contact Arrange
2.54	64 (2*32)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

Reference to female R/A type				
Pitch	Position	Row with conntacts	column with conntacts	Contact Arrange
2.54	32 (2*16)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	DIN 41612 B TYPE(2ROWS)	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1118 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	3 OF 3			
DRAWING NO.		C-DS1118-XXXXXXX					
 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD							