

### FEATURES

**Low power: 1.0 W @ 1 GSPS, 600 mW @ 500 MSPS, full operating conditions**  
**Single carrier W-CDMA ACLR = 80 dBc @ 80 MHz IF**  
**Analog output: adjustable 8.7 mA to 31.7 mA,  $R_L = 25\ \Omega$  to  $50\ \Omega$**   
**Novel 2 $\times$ , 4 $\times$ , and 8 $\times$  interpolator/coarse complex modulator allows carrier placement anywhere in DAC bandwidth**  
**Auxiliary DACs allow control of external VGA and offset control**  
**Multiple chip synchronization interface**  
**High performance, low noise PLL clock multiplier**  
**Digital inverse sinc filter**  
**100-lead, exposed paddle TQFP**

### APPLICATIONS

**Wireless infrastructure**  
**W-CDMA, CDMA2000, TD-SCDMA, WiMax, GSM, LTE**  
**Digital high or low IF synthesis**  
**Internal digital upconversion capability**  
**Transmit diversity**  
**Wideband communications: LMDS/MMDS, point-to-point**

### GENERAL DESCRIPTION

The AD9776A/AD9778A/AD9779A are dual, 12-/14-/16-bit, high dynamic range digital-to-analog converters (DACs) that provide a sample rate of 1 GSPS, permitting a multicarrier generation up to the Nyquist frequency. They include features optimized for direct conversion transmission applications, including complex digital modulation and gain and offset compensation. The DAC outputs are optimized to interface seamlessly with analog quadrature modulators such as the ADL537x FMODE series from Analog Devices, Inc. A 3-wire interface provides for programming/readback of many internal parameters. Full-scale output current can be programmed over a range of 10 mA to 30 mA. The devices are manufactured on an advanced  $0.18\ \mu\text{m}$  CMOS process and operate on 1.8 V and 3.3 V supplies for a total power consumption of 1.0 W. They are enclosed in a 100-lead thin quad flat package (TQFP).

### PRODUCT HIGHLIGHTS

1. Ultralow noise and intermodulation distortion (IMD) enable high quality synthesis of wideband signals from baseband to high intermediate frequencies.
2. A proprietary DAC output switching technique enhances dynamic performance.
3. The current outputs are easily configured for various single-ended or differential circuit topologies.
4. CMOS data input interface with adjustable setup and hold.
5. Novel 2 $\times$ , 4 $\times$ , and 8 $\times$  interpolator/coarse complex modulator allows carrier placement anywhere in DAC bandwidth.

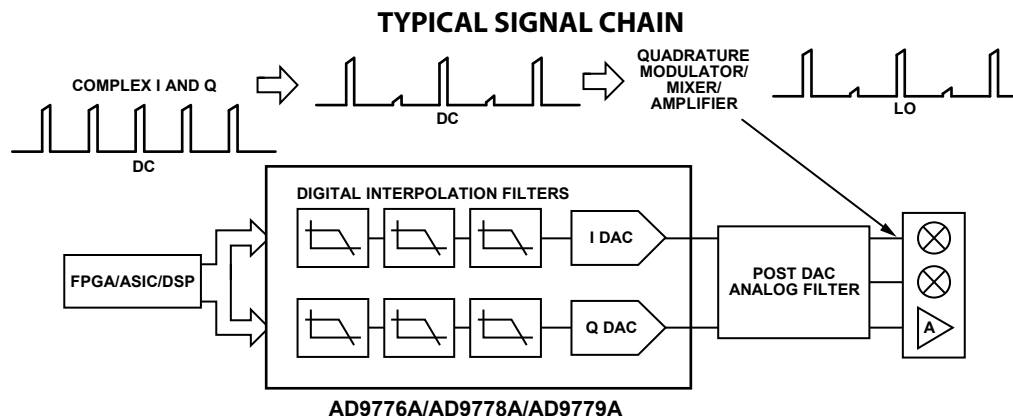


Figure 1.

06452-114

### Rev. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                                    |    |                                               |    |
|----------------------------------------------------|----|-----------------------------------------------|----|
| Features .....                                     | 1  | Inverse Sinc Filter .....                     | 38 |
| Applications .....                                 | 1  | Sourcing the DAC Sample Clock .....           | 39 |
| General Description .....                          | 1  | Direct Clocking .....                         | 39 |
| Product Highlights .....                           | 1  | Clock Multiplication .....                    | 39 |
| Typical Signal Chain .....                         | 1  | Driving the REFCLK Input .....                | 42 |
| Revision History .....                             | 3  | Full-Scale Current Generation .....           | 43 |
| Functional Block Diagram .....                     | 4  | Internal Reference .....                      | 43 |
| Specifications .....                               | 5  | Gain and Offset Correction .....              | 44 |
| DC Specifications .....                            | 5  | I/Q Channel Gain Matching .....               | 44 |
| Digital Specifications .....                       | 6  | Auxiliary DAC Operation .....                 | 44 |
| Digital Input Data Timing Specifications .....     | 7  | LO Feedthrough Compensation .....             | 45 |
| AC Specifications .....                            | 8  | Results of Gain and Offset Correction .....   | 45 |
| Absolute Maximum Ratings .....                     | 9  | Input Data Ports .....                        | 46 |
| Thermal Resistance .....                           | 9  | Single Port Mode .....                        | 46 |
| ESD Caution .....                                  | 9  | Dual Port Mode .....                          | 46 |
| Pin Configurations and Function Descriptions ..... | 10 | Input Data Referenced to DATACLK .....        | 46 |
| Typical Performance Characteristics .....          | 16 | Input Data Referenced to REFCLK .....         | 47 |
| Terminology .....                                  | 24 | Optimizing the Data Input Timing .....        | 48 |
| Theory of Operation .....                          | 25 | Device Synchronization .....                  | 49 |
| Differences Between AD9776/AD9778/ AD9779 and      |    | Synchronization Logic Overview .....          | 49 |
| AD9776A/AD9778A/AD9779A .....                      | 25 | Synchronizing Devices to a System Clock ..... | 50 |
| 3-Wire Interface .....                             | 26 | Interrupt Request Operation .....             | 50 |
| General Operation of the Serial Interface .....    | 26 | Power Dissipation .....                       | 51 |
| Instruction Byte .....                             | 26 | Power-Down and Sleep Modes .....              | 52 |
| Serial Interface Port Pin Descriptions .....       | 27 | Evaluation Board Overview .....               | 53 |
| MSB/LSB Transfers .....                            | 27 | Evaluation Board Operation .....              | 53 |
| 3-Wire Interface Register Map .....                | 28 | Outline Dimensions .....                      | 55 |
| Interpolation Filter Architecture .....            | 33 | Ordering Guide .....                          | 55 |
| Interpolation Filter Bandwidth Limits .....        | 37 |                                               |    |

**REVISION HISTORY****9/08—Rev. A to Rev. B**

|                                                                                              |    |
|----------------------------------------------------------------------------------------------|----|
| Changed Serial Peripheral Interface (SPI) to 3-Wire Interface Throughout .....               | 1  |
| Change to Features Section .....                                                             | 1  |
| Change to Applications Section .....                                                         | 1  |
| Changes to Integral Nonlinearity (INL) Parameter, Table 1 .....                              | 5  |
| Changes to DAC Clock Input (REFCLK+, REFCLK–) Parameter, Table 2 .....                       | 6  |
| Changes to Input Data Parameter, Table 3 .....                                               | 7  |
| Changes to Hold Time Parameters, Table 3 .....                                               | 7  |
| Added 3-Wire Interface Parameter, Table 3 .....                                              | 7  |
| Added Reset Parameter, Table 3 .....                                                         | 7  |
| Changes to Endnotes, Table 3 .....                                                           | 7  |
| Added Exposed Pad Notation to Figure 3, Changes to Table 7 .....                             | 10 |
| Added Exposed Pad Notation to Figure 4, Changes to Table 8 .....                             | 12 |
| Added Exposed Pad Notation to Figure 5, Changes to Table 9 .....                             | 14 |
| Changes to DATACLK Delay Range Section .....                                                 | 25 |
| Changes to Version Register Section .....                                                    | 25 |
| Changes to Table 10 .....                                                                    | 25 |
| Changes to Table 12 .....                                                                    | 26 |
| Changes to Table 13 .....                                                                    | 28 |
| Changes to Table 14 .....                                                                    | 29 |
| Changes to Interpolation Filter Architecture Section .....                                   | 33 |
| Changes to Figure 60 .....                                                                   | 34 |
| Changes to Table 19 .....                                                                    | 36 |
| Changes to Interpolation Filter Bandwidth Limits Section .....                               | 37 |
| Changes to Figure 70 .....                                                                   | 37 |
| Added Digital Modulation Section .....                                                       | 37 |
| Added Table 20 and Table 21; Renumbered Sequentially .....                                   | 38 |
| Added Inverse Sinc Filter Section .....                                                      | 38 |
| Added Figure 71; Renumbered Sequentially .....                                               | 38 |
| Changes to Clock Multiplication Section .....                                                | 39 |
| Changes to Figure 72 .....                                                                   | 39 |
| Changes to Configuring the PLL Band Select Value Section .....                               | 39 |
| Changes to Configuring the PLL Band Select with Temperature Sensing Section .....            | 41 |
| Changes to Known Temperature Calibration with Memory Section .....                           | 41 |
| Changes to Set-and-Forget Device Option Section .....                                        | 41 |
| Added Table 26 .....                                                                         | 41 |
| Changes to Internal Reference Section .....                                                  | 43 |
| Changed Transmit Path Gain and Offset Correction Heading to Gain and Offset Correction ..... | 44 |
| Changes to I/Q Channel Gain Matching Section .....                                           | 44 |

|                                                                                           |    |
|-------------------------------------------------------------------------------------------|----|
| Changes to Auxiliary DAC Operation Section .....                                          | 44 |
| Replaced Figure 79 .....                                                                  | 45 |
| Deleted Figure 79; Renumbered Sequentially .....                                          | 41 |
| Changes to LO Feedthrough Compensation Section .....                                      | 45 |
| Changes to Table 28 .....                                                                 | 47 |
| Changes to Optimizing the Data Input Timing Section .....                                 | 48 |
| Change to Synchronization Logic Overview Section .....                                    | 49 |
| Changes to Figure 88 .....                                                                | 49 |
| Changes to Figure 101 .....                                                               | 53 |
| Deleted Using the ADL5372 Quadrature Modulator Section and Figure 104 .....               | 51 |
| Deleted Evaluation Board Schematics Section and Figure 105; Renumbered Sequentially ..... | 52 |
| Deleted Figure 106 .....                                                                  | 53 |
| Deleted Figure 107 .....                                                                  | 54 |
| Deleted Figure 108 .....                                                                  | 55 |
| Deleted Figure 109 .....                                                                  | 56 |
| Deleted Figure 110 .....                                                                  | 57 |
| Deleted Figure 111 .....                                                                  | 58 |
| Deleted Figure 112 .....                                                                  | 59 |
| Updated Outline Dimensions .....                                                          | 60 |

**3/08—Rev. 0 to Rev. A**

|                                                                 |    |
|-----------------------------------------------------------------|----|
| Changes to Features .....                                       | 1  |
| Added Note 2 .....                                              | 4  |
| Changes to Table 2 .....                                        | 5  |
| Changes to Table 3 .....                                        | 6  |
| Changes to Thermal Resistance Section .....                     | 7  |
| Inserted Table 6 .....                                          | 8  |
| Changes to Pin 39 Description, Table 7 .....                    | 9  |
| Changes to Pin 39 Description, Table 8 .....                    | 10 |
| Changes to Pin 39 Description, Table 9 .....                    | 12 |
| Changes to Theory of Operation Section .....                    | 23 |
| Changes to Table 10 .....                                       | 23 |
| Changes to Table 13 .....                                       | 26 |
| Changes to Table 14 .....                                       | 27 |
| Changes to Interpolation Filter Architecture Section .....      | 33 |
| Replaced Sourcing the DAC Sample Clock Section .....            | 36 |
| Replaced Transmit Path Gain and Offset Correction Section ..... | 40 |
| Replaced Input Data Ports Section .....                         | 42 |
| Replaced Device Synchronization Section .....                   | 45 |
| Deleted Figure 112 to Figure 117 .....                          | 58 |

**8/07—Revision 0: Initial Version**

# AD9776A/AD9778A/AD9779A

## FUNCTIONAL BLOCK DIAGRAM

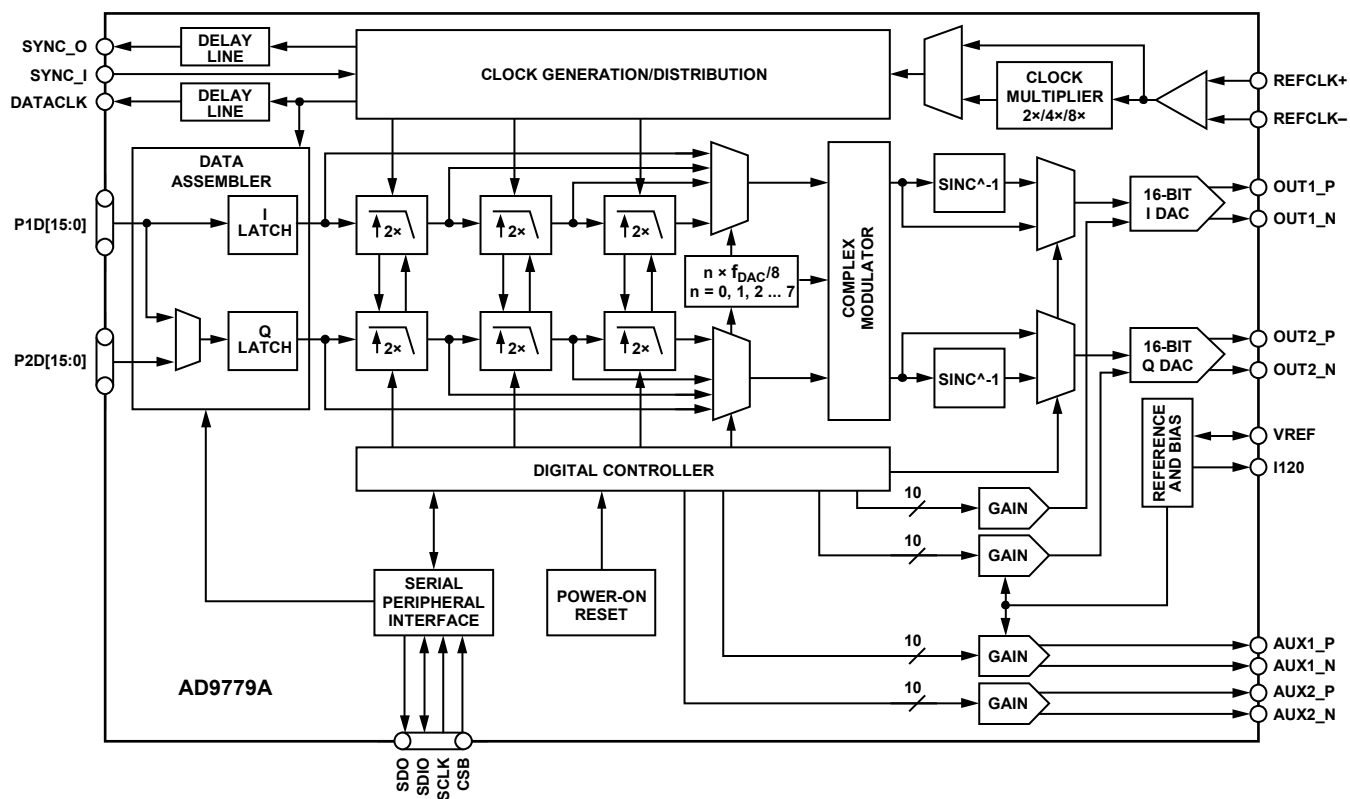


Figure 2. AD9779A Functional Block Diagram

06452-001

# SPECIFICATIONS

## DC SPECIFICATIONS

$T_{MIN}$  to  $T_{MAX}$ ,  $AVDD33 = 3.3$  V,  $DVDD33 = 3.3$  V,  $DVDD18 = 1.8$  V,  $CVDD18 = 1.8$  V,  $I_{OUTFS} = 20$  mA, maximum sample rate, unless otherwise noted.

Table 1.

| Parameter                                                                                | AD9776A    |      |        | AD9778A    |      |        | AD9779A    |      |        | Unit              |
|------------------------------------------------------------------------------------------|------------|------|--------|------------|------|--------|------------|------|--------|-------------------|
|                                                                                          | Min        | Typ  | Max    | Min        | Typ  | Max    | Min        | Typ  | Max    |                   |
| RESOLUTION                                                                               | 12         |      |        | 14         |      |        | 16         |      |        | Bits              |
| ACCURACY                                                                                 |            |      |        |            |      |        |            |      |        |                   |
| Differential Nonlinearity (DNL)                                                          | $\pm 0.1$  |      |        | $\pm 0.65$ |      |        | $\pm 2.1$  |      |        | LSB               |
| Integral Nonlinearity (INL)                                                              | $\pm 0.86$ |      |        | $\pm 1.5$  |      |        | $\pm 6.0$  |      |        | LSB               |
| MAIN DAC OUTPUTS                                                                         |            |      |        |            |      |        |            |      |        |                   |
| Offset Error                                                                             | -0.001     | 0    | +0.001 | -0.001     | 0    | +0.001 | -0.001     | 0    | +0.001 | % FSR             |
| Gain Error (with Internal Reference)                                                     | $\pm 2$    |      |        | $\pm 2$    |      |        | $\pm 2$    |      |        | % FSR             |
| Full-Scale Output Current <sup>1</sup>                                                   | 8.66       | 20.2 | 31.66  | 8.66       | 20.2 | 31.66  | 8.66       | 20.2 | 31.66  | mA                |
| Output Compliance Range                                                                  | -1.0       |      | +1.0   | -1.0       |      | +1.0   | -1.0       |      | +1.0   | V                 |
| Output Resistance                                                                        | 10         |      |        | 10         |      |        | 10         |      |        | M $\Omega$        |
| Gain DAC Monotonicity                                                                    | Guaranteed |      |        | Guaranteed |      |        | Guaranteed |      |        |                   |
| MAIN DAC TEMPERATURE DRIFT                                                               |            |      |        |            |      |        |            |      |        |                   |
| Offset                                                                                   | 0.04       |      |        | 0.04       |      |        | 0.04       |      |        | ppm/ $^{\circ}$ C |
| Gain                                                                                     | 100        |      |        | 100        |      |        | 100        |      |        | ppm/ $^{\circ}$ C |
| Reference Voltage                                                                        | 30         |      |        | 30         |      |        | 30         |      |        | ppm/ $^{\circ}$ C |
| AUXILIARY DAC OUTPUTS                                                                    |            |      |        |            |      |        |            |      |        |                   |
| Resolution                                                                               | 10         |      |        | 10         |      |        | 10         |      |        | Bits              |
| Full-Scale Output Current <sup>1</sup>                                                   | -1.998     |      | +1.998 | -1.998     |      | +1.998 | -1.998     |      | +1.998 | mA                |
| Output Compliance Range (Source)                                                         | 0          |      | 1.6    | 0          |      | 1.6    | 0          |      | 1.6    | V                 |
| Output Compliance Range (Sink)                                                           | 0.8        |      | 1.6    | 0.8        |      | 1.6    | 0.8        |      | 1.6    | V                 |
| Output Resistance                                                                        | 1          |      |        | 1          |      |        | 1          |      |        | M $\Omega$        |
| Auxiliary DAC Monotonicity                                                               | Guaranteed |      |        | Guaranteed |      |        | Guaranteed |      |        |                   |
| REFERENCE                                                                                |            |      |        |            |      |        |            |      |        |                   |
| Internal Reference Voltage                                                               | 1.2        |      |        | 1.2        |      |        | 1.2        |      |        | V                 |
| Output Resistance                                                                        | 5          |      |        | 5          |      |        | 5          |      |        | k $\Omega$        |
| ANALOG SUPPLY VOLTAGES                                                                   |            |      |        |            |      |        |            |      |        |                   |
| AVDD33                                                                                   | 3.13       | 3.3  | 3.47   | 3.13       | 3.3  | 3.47   | 3.13       | 3.3  | 3.47   | V                 |
| CVDD18                                                                                   | 1.70       | 1.8  | 2.05   | 1.70       | 1.8  | 2.05   | 1.70       | 1.8  | 2.05   | V                 |
| DIGITAL SUPPLY VOLTAGES                                                                  |            |      |        |            |      |        |            |      |        |                   |
| DVDD33                                                                                   | 3.13       | 3.3  | 3.47   | 3.13       | 3.3  | 3.47   | 3.13       | 3.3  | 3.47   | V                 |
| DVDD18                                                                                   | 1.70       | 1.8  | 2.05   | 1.70       | 1.8  | 2.05   | 1.70       | 1.8  | 2.05   | V                 |
| POWER CONSUMPTION <sup>2</sup>                                                           |            |      |        |            |      |        |            |      |        |                   |
| 1 $\times$ Mode, $f_{DAC} = 100$ MSPS, IF = 1 MHz                                        | 250 300    |      |        | 250 300    |      |        | 250 300    |      |        | mW                |
| 2 $\times$ Mode, $f_{DAC} = 320$ MSPS, IF = 16 MHz, PLL Off                              | 498        |      |        | 498        |      |        | 498        |      |        | mW                |
| 2 $\times$ Mode, $f_{DAC} = 320$ MSPS, IF = 16 MHz, PLL On                               | 588        |      |        | 588        |      |        | 588        |      |        | mW                |
| 4 $\times$ Mode, $f_{DAC}/4$ Modulation, $f_{DAC} = 500$ MSPS, IF = 137.5 MHz, Q DAC Off | 572        |      |        | 572        |      |        | 572        |      |        | mW                |
| 8 $\times$ Mode, $f_{DAC}/4$ Modulation, $f_{DAC} = 1$ GSPS, IF = 262.5 MHz              | 980        |      |        | 980        |      |        | 980        |      |        | mW                |
| Power-Down Mode                                                                          | 2.5 9.8    |      |        | 2.5 9.8    |      |        | 2.5 9.8    |      |        | mW                |
| Power Supply Rejection Ratio, AVDD33                                                     | -0.3       |      | +0.3   | -0.3       |      | +0.3   | -0.3       |      | +0.3   | % FSR/V           |
| OPERATING RANGE                                                                          | -40        | +25  | +85    | -40        | +25  | +85    | -40        | +25  | +85    | $^{\circ}$ C      |

<sup>1</sup> Based on a 10 k $\Omega$  external resistor.

<sup>2</sup> See the Power Dissipation section for more details.

# AD9776A/AD9778A/AD9779A

## DIGITAL SPECIFICATIONS

$T_{MIN}$  to  $T_{MAX}$ ,  $AVDD33 = 3.3\text{ V}$ ,  $DVDD33 = 3.3\text{ V}$ ,  $DVDD18 = 1.8\text{ V}$ ,  $CVDD18 = 1.8\text{ V}$ ,  $I_{OUTFS} = 20\text{ mA}$ , maximum sample rate, unless otherwise noted. LVDS driver and receiver are compliant to the IEEE-1596 reduced range link, unless otherwise noted.

Table 2.

| Parameter                                              | Conditions                                                                                         | Min   | Typ | Max  | Unit |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------|-----|------|------|
| CMOS INPUT LOGIC LEVEL                                 |                                                                                                    |       |     |      |      |
| Input $V_{IN}$ Logic High                              |                                                                                                    | 2.0   |     |      | V    |
| Input $V_{IN}$ Logic Low                               |                                                                                                    |       |     | 0.8  | V    |
| Maximum Input Data Rate at Interpolation               |                                                                                                    |       |     |      |      |
| 1×                                                     |                                                                                                    | 300   |     |      | MSPS |
| 2×                                                     |                                                                                                    | 250   |     |      | MSPS |
| 4×                                                     |                                                                                                    | 200   |     |      | MSPS |
| 8×                                                     | $DVDD18, CVDD18 = 1.8\text{ V} \pm 5\%$                                                            | 112.5 |     |      | MSPS |
|                                                        | $DVDD18, CVDD18 = 1.9\text{ V} \pm 5\%$                                                            | 125   |     |      | MSPS |
|                                                        | $DVDD18, CVDD18 = 2.0\text{ V} \pm 2\%$                                                            | 137.5 |     |      | MSPS |
| CMOS OUTPUT LOGIC LEVEL (DATACLK, PIN 37) <sup>1</sup> |                                                                                                    |       |     |      |      |
| Output $V_{OUT}$ Logic High                            |                                                                                                    | 2.4   |     |      | V    |
| Output $V_{OUT}$ Logic Low                             |                                                                                                    |       |     | 0.4  | V    |
| DATACLK Output Duty Cycle                              | At 250 MHz, into 5 pF load                                                                         | 40    | 50  | 60   | %    |
| LVDS RECEIVER INPUTS (SYNC_I+, SYNC_I−)                | $SYNC\_I+ = V_{IA}, SYNC\_I- = V_{IB}$                                                             |       |     |      |      |
| Input Voltage Range, $V_{IA}$ or $V_{IB}$              |                                                                                                    | 825   |     | 1575 | mV   |
| Input Differential Threshold, $V_{IDTH}$               |                                                                                                    | −100  |     | +100 | mV   |
| Input Differential Hysteresis, $V_{IDTHH} - V_{IDTHL}$ |                                                                                                    |       | 20  |      | mV   |
| Receiver Differential Input Impedance, $R_{IN}$        |                                                                                                    | 80    |     | 120  | Ω    |
| LVDS Input Rate                                        | Additional limits on $f_{SYNC\_I}$ apply; see description of Register 0x05, Bits[3:1], in Table 14 |       |     | 250  | MSPS |
| Setup Time, SYNC_I to REFCLK                           |                                                                                                    | 0.4   |     |      | ns   |
| Hold Time, SYNC_I to REFCLK                            |                                                                                                    | 0.55  |     |      | ns   |
| LVDS DRIVER OUTPUTS (SYNC_O+, SYNC_O−)                 | $SYNC\_O+ = V_{OA}, SYNC\_O- = V_{OB}, 100\text{ }Ω$ termination                                   |       |     |      |      |
| Output Voltage High, $V_{OA}$ or $V_{OB}$              |                                                                                                    |       |     | 1375 | mV   |
| Output Voltage Low, $V_{OA}$ or $V_{OB}$               |                                                                                                    | 1025  |     |      | mV   |
| Output Differential Voltage, $ V_{OD} $                |                                                                                                    | 150   | 200 | 250  | mV   |
| Output Offset Voltage, $V_{OS}$                        |                                                                                                    | 1150  |     | 1250 | mV   |
| Output Impedance, $R_O$                                | Single-ended                                                                                       | 80    | 100 | 120  | Ω    |
| DAC CLOCK INPUT (REFCLK+, REFCLK−)                     |                                                                                                    |       |     |      |      |
| Differential Peak-to-Peak Voltage                      |                                                                                                    | 400   | 800 | 2000 | mV   |
| Common-Mode Voltage                                    |                                                                                                    | 300   | 400 | 500  | mV   |
| Maximum Clock Rate                                     | $DVDD18, CVDD18 = 1.8\text{ V} \pm 5\%$ , PLL off                                                  | 900   |     |      | MHz  |
|                                                        | $DVDD18, CVDD18 = 1.9\text{ V} \pm 5\%$ , PLL off                                                  | 1000  |     |      | MHz  |
|                                                        | $DVDD18, CVDD18 = 2.0\text{ V} \pm 2\%$ , PLL off                                                  | 1100  |     |      | MHz  |
|                                                        | $DVDD18, CVDD18 = 2.0\text{ V} \pm 2\%$ , PLL on                                                   | 250   |     |      | MHz  |

<sup>1</sup> Specification is at a DATACLK frequency of 100 MHz into a 1 kΩ load, with maximum drive capability of 8 mA. At higher speeds or greater loads, best practice suggests using an external buffer for this signal.

**DIGITAL INPUT DATA TIMING SPECIFICATIONS**All modes,  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .**Table 3.**

| Parameter                                  | Conditions                 | Min   | Typ | Max  | Unit          |
|--------------------------------------------|----------------------------|-------|-----|------|---------------|
| INPUT DATA <sup>1</sup>                    |                            |       |     |      |               |
| Setup Time                                 | Input data to DATACLK      | 3.0   |     |      | ns            |
| Hold Time                                  | Input data to DATACLK      | −0.05 |     |      | ns            |
| Setup Time                                 | Input data to REFCLK       | −0.80 |     |      | ns            |
| Hold Time                                  | Input data to REFCLK       | 3.80  |     |      | ns            |
| LATENCY                                    |                            |       |     |      |               |
| 1× Interpolation                           | With or without modulation |       | 25  |      | DACCLK cycles |
| 2× Interpolation                           | With or without modulation |       | 70  |      | DACCLK cycles |
| 4× Interpolation                           | With or without modulation |       | 146 |      | DACCLK cycles |
| 8× Interpolation                           | With or without modulation |       | 297 |      | DACCLK cycles |
| Inverse Sync                               |                            |       | 18  |      | DACCLK cycles |
| 3-WIRE INTERFACE                           |                            |       |     |      |               |
| Maximum Clock Rate (SCLK)                  |                            | 40    |     |      | MHz           |
| Minimum Pulse Width High, $t_{\text{PWH}}$ |                            |       |     | 12.5 | ns            |
| Minimum Pulse Width Low, $t_{\text{PWL}}$  |                            |       |     | 12.5 | ns            |
| Setup Time, $t_{\text{DS}}$                | SDIO to SCLK               | 2.8   |     |      | ns            |
| Hold Time, $t_{\text{DH}}$                 | SDIO to SCLK               | 0.0   |     |      | ns            |
| Setup Time, $t_{\text{DS}}$                | CSB to SCLK                | 2.8   |     |      | ns            |
| Data Valid, $t_{\text{DV}}$                | SDO to SCLK                | 2.0   |     |      | ns            |
| POWER-UP TIME <sup>2</sup>                 |                            |       | 260 |      | ms            |
| RESET                                      |                            |       |     |      |               |
| Minimum Pulse Width, High                  |                            |       |     | 2    | DACCLK cycles |

<sup>1</sup> Specified values are with PLL disabled. Timing vs. temperature and data valid keep out windows (that is, the minimum amount of time valid data must be presented to the device to ensure proper sampling) are delineated in Table 28.

<sup>2</sup> Measured from CSB rising edge when Register 0x00, Bit 4, is written from 1 to 0 with the VREF decoupling capacitor equal to 0.1  $\mu\text{F}$ .

# AD9776A/AD9778A/AD9779A

## AC SPECIFICATIONS

$T_{MIN}$  to  $T_{MAX}$ ,  $AVDD33 = 3.3$  V,  $DVDD33 = 3.3$  V,  $DVDD18 = 1.8$  V,  $CVDD18 = 1.8$  V,  $I_{OUTFS} = 20$  mA, maximum sample rate, unless otherwise noted.

Table 4.

| Parameter                                                           | AD9776A |        |     | AD9778A |      |     | AD9779A |      |     | Unit   |
|---------------------------------------------------------------------|---------|--------|-----|---------|------|-----|---------|------|-----|--------|
|                                                                     | Min     | Typ    | Max | Min     | Typ  | Max | Min     | Typ  | Max |        |
| SPURIOUS-FREE DYNAMIC RANGE (SFDR)                                  |         |        |     |         |      |     |         |      |     |        |
| $f_{DAC} = 100$ MSPS, $f_{OUT} = 20$ MHz                            |         | 82     |     |         | 82   |     |         | 82   |     | dBc    |
| $f_{DAC} = 200$ MSPS, $f_{OUT} = 50$ MHz                            |         | 81     |     |         | 81   |     |         | 82   |     | dBc    |
| $f_{DAC} = 400$ MSPS, $f_{OUT} = 70$ MHz                            |         | 80     |     |         | 80   |     |         | 80   |     | dBc    |
| $f_{DAC} = 800$ MSPS, $f_{OUT} = 70$ MHz                            |         | 85     |     |         | 85   |     |         | 87   |     | dBc    |
| TWO-TONE INTERMODULATION DISTORTION (IMD)                           |         |        |     |         |      |     |         |      |     |        |
| $f_{DAC} = 200$ MSPS, $f_{OUT} = 50$ MHz                            |         | 87     |     |         | 87   |     |         | 91   |     | dBc    |
| $f_{DAC} = 400$ MSPS, $f_{OUT} = 60$ MHz                            |         | 80     |     |         | 85   |     |         | 85   |     | dBc    |
| $f_{DAC} = 400$ MSPS, $f_{OUT} = 80$ MHz                            |         | 75     |     |         | 81   |     |         | 81   |     | dBc    |
| $f_{DAC} = 800$ MSPS, $f_{OUT} = 100$ MHz                           |         | 75     |     |         | 80   |     |         | 81   |     | dBc    |
| NOISE SPECTRAL DENSITY (NSD), EIGHT-TONE, 500 kHz TONE SPACING      |         |        |     |         |      |     |         |      |     |        |
| $f_{DAC} = 200$ MSPS, $f_{OUT} = 80$ MHz                            |         | −152   |     |         | −155 |     |         | −158 |     | dBm/Hz |
| $f_{DAC} = 400$ MSPS, $f_{OUT} = 80$ MHz                            |         | −155   |     |         | −159 |     |         | −160 |     | dBm/Hz |
| $f_{DAC} = 800$ MSPS, $f_{OUT} = 80$ MHz                            |         | −157.5 |     |         | −160 |     |         | −161 |     | dBm/Hz |
| W-CDMA ADJACENT CHANNEL LEAKAGE RATIO (ACLR), SINGLE CARRIER        |         |        |     |         |      |     |         |      |     |        |
| $f_{DAC} = 491.52$ MSPS, $f_{OUT} = 100$ MHz                        |         | 76     |     |         | 78   |     |         | 79   |     | dBc    |
| $f_{DAC} = 491.52$ MSPS, $f_{OUT} = 200$ MHz                        |         | 69     |     |         | 73   |     |         | 74   |     | dBc    |
| W-CDMA SECOND ADJACENT CHANNEL LEAKAGE RATIO (ACLR), SINGLE CARRIER |         |        |     |         |      |     |         |      |     |        |
| $f_{DAC} = 491.52$ MSPS, $f_{OUT} = 100$ MHz                        |         | 77.5   |     |         | 80   |     |         | 81   |     | dBc    |
| $f_{DAC} = 491.52$ MSPS, $f_{OUT} = 200$ MHz                        |         | 76     |     |         | 78   |     |         | 78   |     | dBc    |



## ABSOLUTE MAXIMUM RATINGS

Table 5.

| Parameter                                                                                       | With Respect To  | Rating                      |
|-------------------------------------------------------------------------------------------------|------------------|-----------------------------|
| AVDD33, DVDD33                                                                                  | AGND, DGND, CGND | −0.3 V to +3.6 V            |
| DVDD18, CVDD18                                                                                  | AGND, DGND, CGND | −0.3 V to +2.1 V            |
| AGND                                                                                            | DGND, CGND       | −0.3 V to +0.3 V            |
| DGND                                                                                            | AGND, CGND       | −0.3 V to +0.3 V            |
| CGND                                                                                            | AGND, DGND       | −0.3 V to +0.3 V            |
| I120, VREF, IPTAT                                                                               | AGND             | −0.3 V to<br>AVDD33 + 0.3 V |
| OUT1_P, OUT1_N,<br>OUT2_P, OUT2_N,<br>AUX1_P, AUX1_N,<br>AUX2_P, AUX2_N<br>P1D[15:0], P2D[15:0] | AGND             | −1.0 V to<br>AVDD33 + 0.3 V |
| DATACLK, TXENABLE                                                                               | DGND             | −0.3 V to<br>DVDD33 + 0.3 V |
| REFCLK+, REFCLK−                                                                                | CGND             | −0.3 V to<br>CVDD18 + 0.3 V |
| RESET, IRQ, PLL_LOCK,<br>SYNC_O+, SYNC_O−,<br>SYNC_I+, SYNC_I−,<br>CSB, SCLK, SDIO, SDO         | DGND             | −0.3 V to<br>DVDD33 + 0.3 V |
| Junction Temperature                                                                            |                  | +125°C                      |
| Storage Temperature<br>Range                                                                    |                  | −65°C to +150°C             |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

For optimal thermal performance, the exposed paddle (EPAD) should be soldered to the ground plane for the 100-lead, thermally enhanced TQFP package.

Typical  $\theta_{JA}$  and  $\theta_{JC}$  are specified for a 4-layer board in still air. Airflow increases heat dissipation, effectively reducing  $\theta_{JA}$ .

Table 6. Thermal Resistance

| Package Type      | $\theta_{JA}$ | $\theta_{JB}$ | $\theta_{JC}$ | Unit |
|-------------------|---------------|---------------|---------------|------|
| 100-Lead TQFP     |               |               |               |      |
| EPAD Soldered     | 19.1          | 12.4          | 7.1           | °C/W |
| EPAD Not Soldered | 27.4          |               |               | °C/W |

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

# AD9776A/AD9778A/AD9779A

## PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

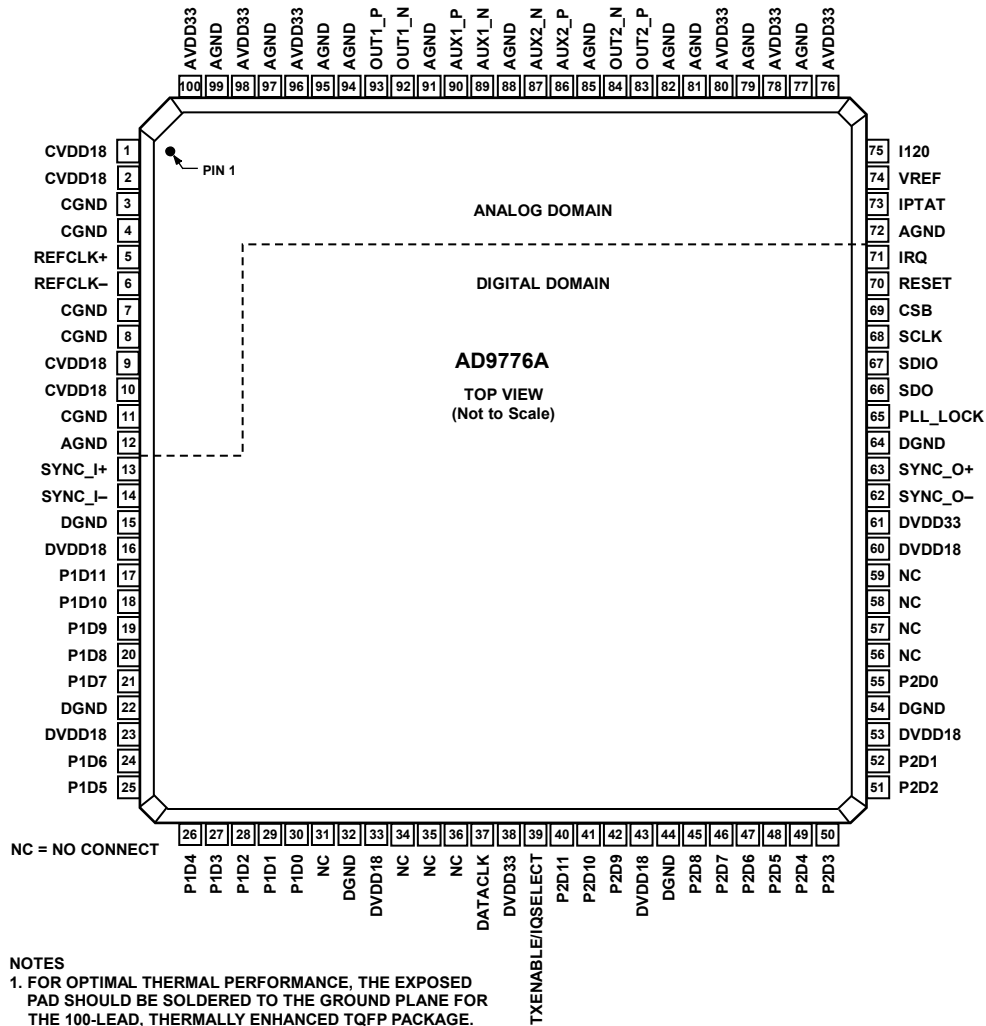


Figure 3. AD9776A Pin Configuration

Table 7. AD9776A Pin Function Descriptions

| Pin No. | Mnemonic | Description                         |
|---------|----------|-------------------------------------|
| 1       | CVDD18   | 1.8 V Clock Supply.                 |
| 2       | CVDD18   | 1.8 V Clock Supply.                 |
| 3       | CGND     | Clock Ground.                       |
| 4       | CGND     | Clock Ground.                       |
| 5       | REFCLK+  | Differential Clock Input.           |
| 6       | REFCLK-  | Differential Clock Input.           |
| 7       | CGND     | Clock Ground.                       |
| 8       | CGND     | Clock Ground.                       |
| 9       | CVDD18   | 1.8 V Clock Supply.                 |
| 10      | CVDD18   | 1.8 V Clock Supply.                 |
| 11      | CGND     | Clock Ground.                       |
| 12      | AGND     | Analog Ground.                      |
| 13      | SYNC_I+  | Differential Synchronization Input. |
| 14      | SYNC_I-  | Differential Synchronization Input. |
| 15      | DGND     | Digital Ground.                     |
| 16      | DVDD18   | 1.8 V Digital Supply.               |

| Pin No. | Mnemonic | Description                   |
|---------|----------|-------------------------------|
| 17      | P1D11    | Port 1, Data Input D11 (MSB). |
| 18      | P1D10    | Port 1, Data Input D10.       |
| 19      | P1D9     | Port 1, Data Input D9.        |
| 20      | P1D8     | Port 1, Data Input D8.        |
| 21      | P1D7     | Port 1, Data Input D7.        |
| 22      | DGND     | Digital Ground.               |
| 23      | DVDD18   | 1.8 V Digital Supply.         |
| 24      | P1D6     | Port 1, Data Input D6.        |
| 25      | P1D5     | Port 1, Data Input D5.        |
| 26      | P1D4     | Port 1, Data Input D4.        |
| 27      | P1D3     | Port 1, Data Input D3.        |
| 28      | P1D2     | Port 1, Data Input D2.        |
| 29      | P1D1     | Port 1, Data Input D1.        |
| 30      | P1D0     | Port 1, Data Input D0 (LSB).  |
| 31      | NC       | No Connect.                   |
| 32      | DGND     | Digital Ground.               |

| Pin No. | Mnemonic              | Description                                                                |
|---------|-----------------------|----------------------------------------------------------------------------|
| 33      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 34      | NC                    | No Connect.                                                                |
| 35      | NC                    | No Connect.                                                                |
| 36      | NC                    | No Connect.                                                                |
| 37      | DATACLK               | Data Clock Output.                                                         |
| 38      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 39      | TXENABLE/<br>IQSELECT | Transmit Enable. In single port mode, this pin also functions as IQSELECT. |
| 40      | P2D11                 | Port 2, Data Input D11 (MSB).                                              |
| 41      | P2D10                 | Port 2, Data Input D10.                                                    |
| 42      | P2D9                  | Port 2, Data Input D9.                                                     |
| 43      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 44      | DGND                  | Digital Ground.                                                            |
| 45      | P2D8                  | Port 2, Data Input D8.                                                     |
| 46      | P2D7                  | Port 2, Data Input D7.                                                     |
| 47      | P2D6                  | Port 2, Data Input D6.                                                     |
| 48      | P2D5                  | Port 2, Data Input D5.                                                     |
| 49      | P2D4                  | Port 2, Data Input D4.                                                     |
| 50      | P2D3                  | Port 2, Data Input D3.                                                     |
| 51      | P2D2                  | Port 2, Data Input D2.                                                     |
| 52      | P2D1                  | Port 2, Data Input D1.                                                     |
| 53      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 54      | DGND                  | Digital Ground.                                                            |
| 55      | P2D0                  | Port 2, Data Input D0 (LSB).                                               |
| 56      | NC                    | No Connect.                                                                |
| 57      | NC                    | No Connect.                                                                |
| 58      | NC                    | No Connect.                                                                |
| 59      | NC                    | No Connect.                                                                |
| 60      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 61      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 62      | SYNC_O–               | Differential Synchronization Output.                                       |
| 63      | SYNC_O+               | Differential Synchronization Output.                                       |
| 64      | DGND                  | Digital Ground.                                                            |
| 65      | PLL_LOCK              | PLL Lock Indicator.                                                        |
| 66      | SDO                   | 3-Wire Interface Port Data Output.                                         |
| 67      | SDIO                  | 3-Wire Interface Port Data Input/Output.                                   |
| 68      | SCLK                  | 3-Wire Interface Port Clock.                                               |

| Pin No. | Mnemonic | Description                                                                                                                                                                    |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 69      | CSB      | 3-Wire Interface Port Chip Select Bar.                                                                                                                                         |
| 70      | RESET    | Reset, Active High.                                                                                                                                                            |
| 71      | IRQ      | Interrupt Request.                                                                                                                                                             |
| 72      | AGND     | Analog Ground.                                                                                                                                                                 |
| 73      | IPTAT    | Factory Test Pin. Output current is proportional to absolute temperature, approximately 14 $\mu$ A at 25°C with approximately 20 nA/°C slope. This pin should remain floating. |
| 74      | VREF     | Voltage Reference Output.                                                                                                                                                      |
| 75      | I120     | 120 $\mu$ A Reference Current.                                                                                                                                                 |
| 76      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 77      | AGND     | Analog Ground.                                                                                                                                                                 |
| 78      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 79      | AGND     | Analog Ground.                                                                                                                                                                 |
| 80      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 81      | AGND     | Analog Ground.                                                                                                                                                                 |
| 82      | AGND     | Analog Ground.                                                                                                                                                                 |
| 83      | OUT2_P   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 84      | OUT2_N   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 85      | AGND     | Analog Ground.                                                                                                                                                                 |
| 86      | AUX2_P   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 87      | AUX2_N   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 88      | AGND     | Analog Ground.                                                                                                                                                                 |
| 89      | AUX1_N   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 90      | AUX1_P   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 91      | AGND     | Analog Ground.                                                                                                                                                                 |
| 92      | OUT1_N   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 93      | OUT1_P   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 94      | AGND     | Analog Ground.                                                                                                                                                                 |
| 95      | AGND     | Analog Ground.                                                                                                                                                                 |
| 96      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 97      | AGND     | Analog Ground.                                                                                                                                                                 |
| 98      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 99      | AGND     | Analog Ground.                                                                                                                                                                 |
| 100     | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |

# AD9776A/AD9778A/AD9779A

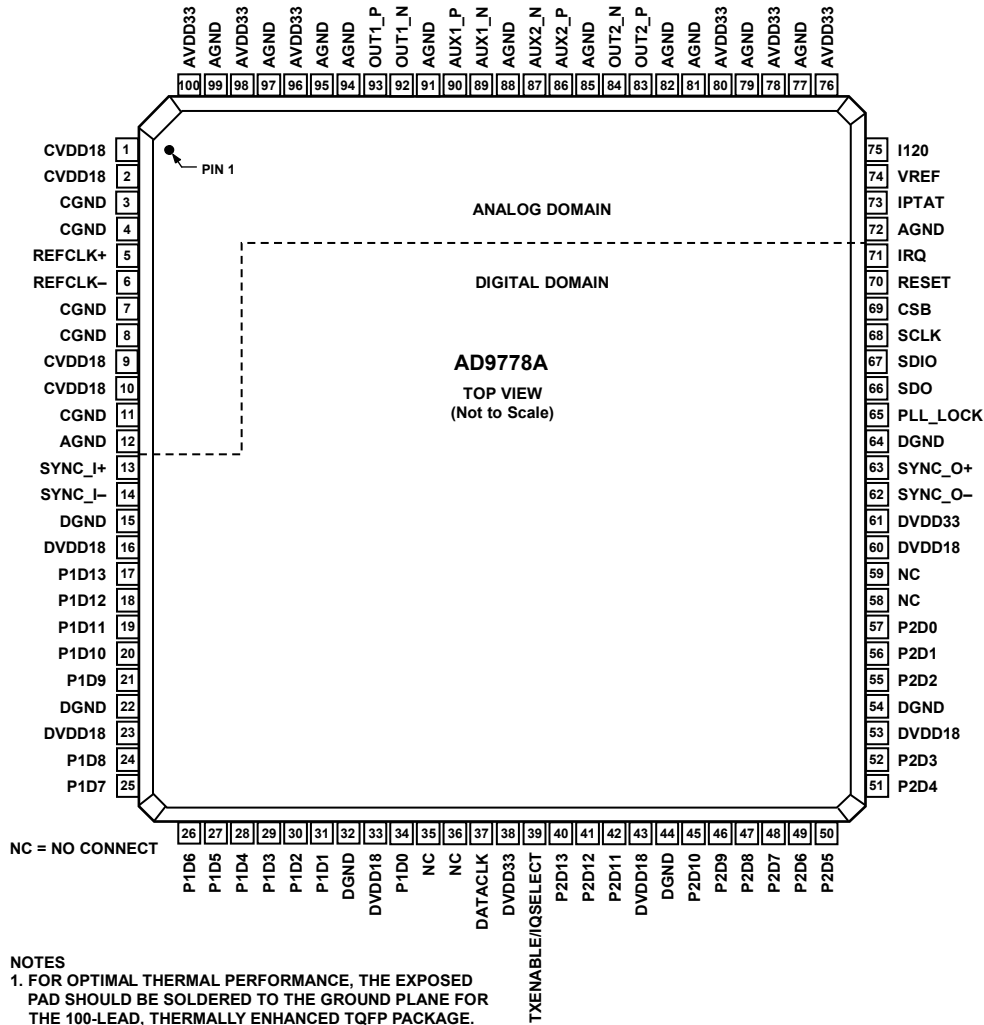


Figure 4. AD9778A Pin Configuration


Table 8. AD9778A Pin Function Descriptions

| Pin No. | Mnemonic | Description                         | Pin No. | Mnemonic | Description                  |
|---------|----------|-------------------------------------|---------|----------|------------------------------|
| 1       | CVDD18   | 1.8 V Clock Supply.                 | 19      | P1D11    | Port 1, Data Input D11.      |
| 2       | CVDD18   | 1.8 V Clock Supply.                 | 20      | P1D10    | Port 1, Data Input D10.      |
| 3       | CGND     | Clock Ground.                       | 21      | P1D9     | Port 1, Data Input D9.       |
| 4       | CGND     | Clock Common.                       | 22      | DGND     | Digital Ground.              |
| 5       | REFCLK+  | Differential Clock Input.           | 23      | DVDD18   | 1.8 V Digital Supply.        |
| 6       | REFCLK-  | Differential Clock Input.           | 24      | P1D8     | Port 1, Data Input D8.       |
| 7       | CGND     | Clock Ground.                       | 25      | P1D7     | Port 1, Data Input D7.       |
| 8       | CGND     | Clock Ground.                       | 26      | P1D6     | Port 1, Data Input D6.       |
| 9       | CVDD18   | 1.8 V Clock Supply.                 | 27      | P1D5     | Port 1, Data Input D5.       |
| 10      | CVDD18   | 1.8 V Clock Supply.                 | 28      | P1D4     | Port 1, Data Input D4.       |
| 11      | CGND     | Clock Ground.                       | 29      | P1D3     | Port 1, Data Input D3.       |
| 12      | AGND     | Analog Ground.                      | 30      | P1D2     | Port 1, Data Input D2.       |
| 13      | SYNC_I+  | Differential Synchronization Input. | 31      | P1D1     | Port 1, Data Input D1.       |
| 14      | SYNC_I-  | Differential Synchronization Input. | 32      | DGND     | Digital Ground.              |
| 15      | DGND     | Digital Ground.                     | 33      | DVDD18   | 1.8 V Digital Supply.        |
| 16      | DVDD18   | 1.8 V Digital Supply.               | 34      | P1D0     | Port 1, Data Input D0 (LSB). |
| 17      | P1D13    | Port 1, Data Input D13 (MSB).       | 35      | NC       | No Connect.                  |
| 18      | P1D12    | Port 1, Data Input D12.             | 36      | NC       | No Connect.                  |

| Pin No. | Mnemonic              | Description                                                                |
|---------|-----------------------|----------------------------------------------------------------------------|
| 37      | DATACLK               | Data Clock Output.                                                         |
| 38      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 39      | TXENABLE/<br>IQSELECT | Transmit Enable. In single port mode, this pin also functions as IQSELECT. |
| 40      | P2D13                 | Port 2, Data Input D13 (MSB).                                              |
| 41      | P2D12                 | Port 2, Data Input D12.                                                    |
| 42      | P2D11                 | Port 2, Data Input D11.                                                    |
| 43      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 44      | DGND                  | Digital Ground.                                                            |
| 45      | P2D10                 | Port 2, Data Input D10.                                                    |
| 46      | P2D9                  | Port 2, Data Input D9.                                                     |
| 47      | P2D8                  | Port 2, Data Input D8.                                                     |
| 48      | P2D7                  | Port 2, Data Input D7.                                                     |
| 49      | P2D6                  | Port 2, Data Input D6.                                                     |
| 50      | P2D5                  | Port 2, Data Input D5.                                                     |
| 51      | P2D4                  | Port 2, Data Input D4.                                                     |
| 52      | P2D3                  | Port 2, Data Input D3.                                                     |
| 53      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 54      | DGND                  | Digital Ground.                                                            |
| 55      | P2D2                  | Port 2, Data Input D2.                                                     |
| 56      | P2D1                  | Port 2, Data Input D1.                                                     |
| 57      | P2D0                  | Port 2, Data Input D0 (LSB).                                               |
| 58      | NC                    | No Connect.                                                                |
| 59      | NC                    | No Connect.                                                                |
| 60      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 61      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 62      | SYNC_O–               | Differential Synchronization Output.                                       |
| 63      | SYNC_O+               | Differential Synchronization Output.                                       |
| 64      | DGND                  | Digital Ground.                                                            |
| 65      | PLL_LOCK              | PLL Lock Indicator.                                                        |
| 66      | SDO                   | 3-Wire Interface Port Data Output.                                         |
| 67      | SDIO                  | 3-Wire Interface Port Data Input/Output.                                   |
| 68      | SCLK                  | 3-Wire Interface Port Clock.                                               |
| 69      | CSB                   | 3-Wire Interface Port Chip Select Bar.                                     |
| 70      | RESET                 | Reset, Active High.                                                        |

| Pin No. | Mnemonic | Description                                                                                                                                                                    |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 71      | IRQ      | Interrupt Request.                                                                                                                                                             |
| 72      | AGND     | Analog Ground.                                                                                                                                                                 |
| 73      | IPTAT    | Factory Test Pin. Output current is proportional to absolute temperature, approximately 14 $\mu$ A at 25°C with approximately 20 nA/°C slope. This pin should remain floating. |
| 74      | VREF     | Voltage Reference Output.                                                                                                                                                      |
| 75      | I120     | 120 $\mu$ A Reference Current.                                                                                                                                                 |
| 76      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 77      | AGND     | Analog Ground.                                                                                                                                                                 |
| 78      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 79      | AGND     | Analog Ground.                                                                                                                                                                 |
| 80      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 81      | AGND     | Analog Ground.                                                                                                                                                                 |
| 82      | AGND     | Analog Ground.                                                                                                                                                                 |
| 83      | OUT2_P   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 84      | OUT2_N   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 85      | AGND     | Analog Ground.                                                                                                                                                                 |
| 86      | AUX2_P   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 87      | AUX2_N   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 88      | AGND     | Analog Ground.                                                                                                                                                                 |
| 89      | AUX1_N   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 90      | AUX1_P   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 91      | AGND     | Analog Ground.                                                                                                                                                                 |
| 92      | OUT1_N   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 93      | OUT1_P   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 94      | AGND     | Analog Ground.                                                                                                                                                                 |
| 95      | AGND     | Analog Ground.                                                                                                                                                                 |
| 96      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 97      | AGND     | Analog Ground.                                                                                                                                                                 |
| 98      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 99      | AGND     | Analog Ground.                                                                                                                                                                 |
| 100     | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |

**AD9776A/AD9778A/AD9779A**

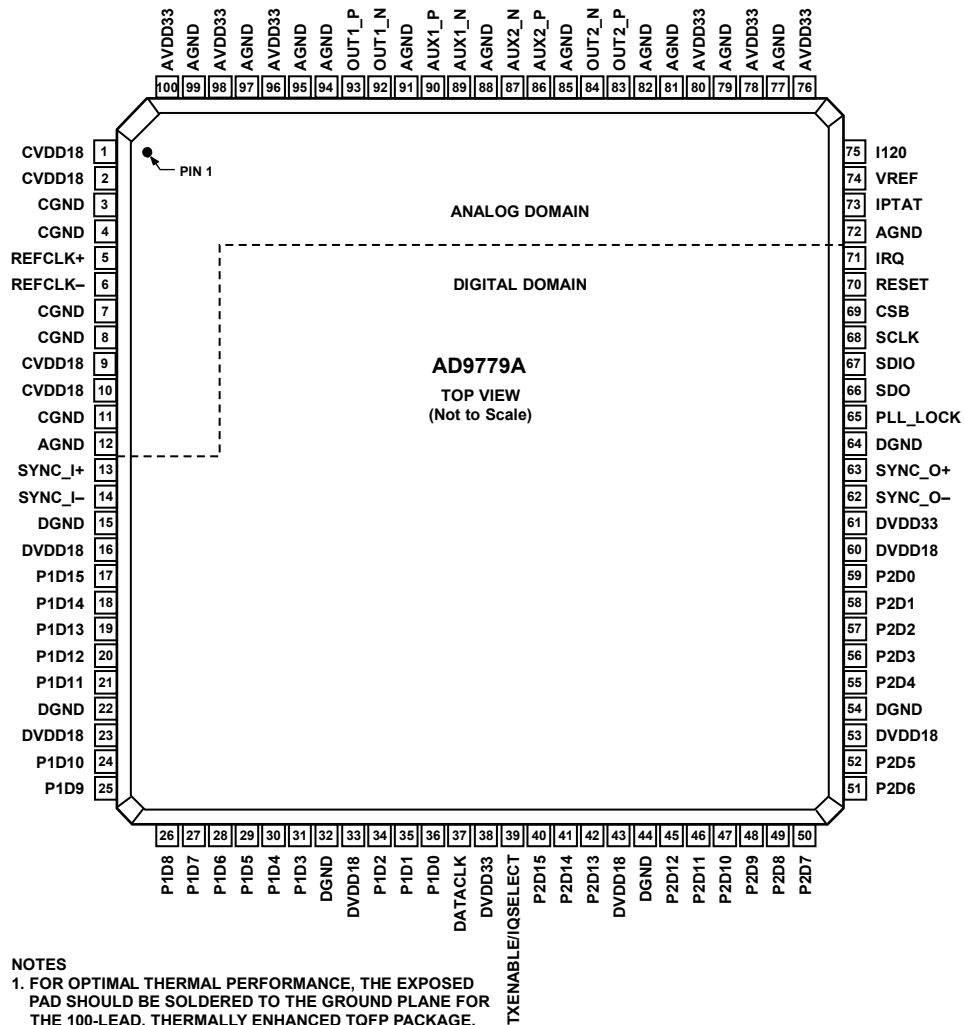

*Figure 5. AD9779A Pin Configuration*

### Table 9. AD9779A Pin Function Descriptions

| Pin No. | Mnemonic | Description                         | Pin No. | Mnemonic | Description                  |
|---------|----------|-------------------------------------|---------|----------|------------------------------|
| 1       | CVDD18   | 1.8 V Clock Supply.                 | 19      | P1D13    | Port 1, Data Input D13.      |
| 2       | CVDD18   | 1.8 V Clock Supply.                 | 20      | P1D12    | Port 1, Data Input D12.      |
| 3       | CGND     | Clock Ground.                       | 21      | P1D11    | Port 1, Data Input D11.      |
| 4       | CGND     | Clock Ground.                       | 22      | DGND     | Digital Ground.              |
| 5       | REFCLK+  | Differential Clock Input.           | 23      | DVDD18   | 1.8 V Digital Supply.        |
| 6       | REFCLK–  | Differential Clock Input.           | 24      | P1D10    | Port 1, Data Input D10.      |
| 7       | CGND     | Clock Ground.                       | 25      | P1D9     | Port 1, Data Input D9.       |
| 8       | CGND     | Clock Ground.                       | 26      | P1D8     | Port 1, Data Input D8.       |
| 9       | CVDD18   | 1.8 V Clock Supply.                 | 27      | P1D7     | Port 1, Data Input D7.       |
| 10      | CVDD18   | 1.8 V Clock Supply.                 | 28      | P1D6     | Port 1, Data Input D6.       |
| 11      | CGND     | Clock Ground.                       | 29      | P1D5     | Port 1, Data Input D5.       |
| 12      | AGND     | Analog Ground.                      | 30      | P1D4     | Port 1, Data Input D4.       |
| 13      | SYNC_I+  | Differential Synchronization Input. | 31      | P1D3     | Port 1, Data Input D3.       |
| 14      | SYNC_I–  | Differential Synchronization Input. | 32      | DGND     | Digital Ground.              |
| 15      | DGND     | Digital Ground.                     | 33      | DVDD18   | 1.8 V Digital Supply.        |
| 16      | DVDD18   | 1.8 V Digital Supply.               | 34      | P1D2     | Port 1, Data Input D2.       |
| 17      | P1D15    | Port 1, Data Input D15 (MSB).       | 35      | P1D1     | Port 1, Data Input D1.       |
| 18      | P1D14    | Port 1, Data Input D14.             | 36      | P1D0     | Port 1, Data Input D0 (LSB). |

| Pin No. | Mnemonic              | Description                                                                |
|---------|-----------------------|----------------------------------------------------------------------------|
| 37      | DATACLK               | Data Clock Output.                                                         |
| 38      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 39      | TXENABLE/<br>IQSELECT | Transmit Enable. In single port mode, this pin also functions as IQSELECT. |
| 40      | P2D15                 | Port 2, Data Input D15 (MSB).                                              |
| 41      | P2D14                 | Port 2, Data Input D14.                                                    |
| 42      | P2D13                 | Port 2, Data Input D13.                                                    |
| 43      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 44      | DGND                  | Digital Ground.                                                            |
| 45      | P2D12                 | Port 2, Data Input D12.                                                    |
| 46      | P2D11                 | Port 2, Data Input D11.                                                    |
| 47      | P2D10                 | Port 2, Data Input D10.                                                    |
| 48      | P2D9                  | Port 2, Data Input D9.                                                     |
| 49      | P2D8                  | Port 2, Data Input D8.                                                     |
| 50      | P2D7                  | Port 2, Data Input D7.                                                     |
| 51      | P2D6                  | Port 2, Data Input D6.                                                     |
| 52      | P2D5                  | Port 2, Data Input D5.                                                     |
| 53      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 54      | DGND                  | Digital Ground.                                                            |
| 55      | P2D4                  | Port 2, Data Input D4.                                                     |
| 56      | P2D3                  | Port 2, Data Input D3.                                                     |
| 57      | P2D2                  | Port 2, Data Input D2.                                                     |
| 58      | P2D1                  | Port 2, Data Input D1.                                                     |
| 59      | P2D0                  | Port 2, Data Input D0 (LSB).                                               |
| 60      | DVDD18                | 1.8 V Digital Supply.                                                      |
| 61      | DVDD33                | 3.3 V Digital Supply.                                                      |
| 62      | SYNC_O–               | Differential Synchronization Output.                                       |
| 63      | SYNC_O+               | Differential Synchronization Output.                                       |
| 64      | DGND                  | Digital Ground.                                                            |
| 65      | PLL_LOCK              | PLL Lock Indicator.                                                        |
| 66      | SDO                   | 3-Wire Interface Port Data Output.                                         |
| 67      | SDIO                  | 3-Wire Interface Port Data Input/Output.                                   |
| 68      | SCLK                  | 3-Wire Interface Port Clock.                                               |
| 69      | CSB                   | 3-Wire Interface Port Chip Select Bar.                                     |
| 70      | RESET                 | Reset, Active High.                                                        |

| Pin No. | Mnemonic | Description                                                                                                                                                                    |
|---------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 71      | IRQ      | Interrupt Request.                                                                                                                                                             |
| 72      | AGND     | Analog Ground.                                                                                                                                                                 |
| 73      | IPTAT    | Factory Test Pin. Output current is proportional to absolute temperature, approximately 14 $\mu$ A at 25°C with approximately 20 nA/°C slope. This pin should remain floating. |
| 74      | VREF     | Voltage Reference Output.                                                                                                                                                      |
| 75      | I120     | 120 $\mu$ A Reference Current.                                                                                                                                                 |
| 76      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 77      | AGND     | Analog Ground.                                                                                                                                                                 |
| 78      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 79      | AGND     | Analog Ground.                                                                                                                                                                 |
| 80      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 81      | AGND     | Analog Ground.                                                                                                                                                                 |
| 82      | AGND     | Analog Ground.                                                                                                                                                                 |
| 83      | OUT2_P   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 84      | OUT2_N   | Differential DAC Current Output, Channel 2.                                                                                                                                    |
| 85      | AGND     | Analog Ground.                                                                                                                                                                 |
| 86      | AUX2_P   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 87      | AUX2_N   | Auxiliary DAC Current Output, Channel 2.                                                                                                                                       |
| 88      | AGND     | Analog Ground.                                                                                                                                                                 |
| 89      | AUX1_N   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 90      | AUX1_P   | Auxiliary DAC Current Output, Channel 1.                                                                                                                                       |
| 91      | AGND     | Analog Ground.                                                                                                                                                                 |
| 92      | OUT1_N   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 93      | OUT1_P   | Differential DAC Current Output, Channel 1.                                                                                                                                    |
| 94      | AGND     | Analog Ground.                                                                                                                                                                 |
| 95      | AGND     | Analog Ground.                                                                                                                                                                 |
| 96      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 97      | AGND     | Analog Ground.                                                                                                                                                                 |
| 98      | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |
| 99      | AGND     | Analog Ground.                                                                                                                                                                 |
| 100     | AVDD33   | 3.3 V Analog Supply.                                                                                                                                                           |

## TYPICAL PERFORMANCE CHARACTERISTICS

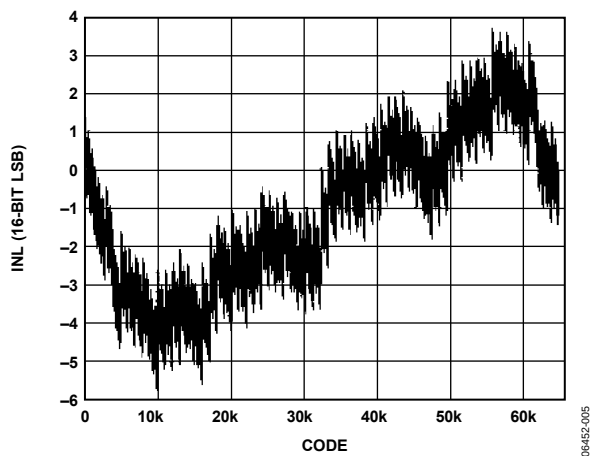


Figure 6. AD9779A Typical INL

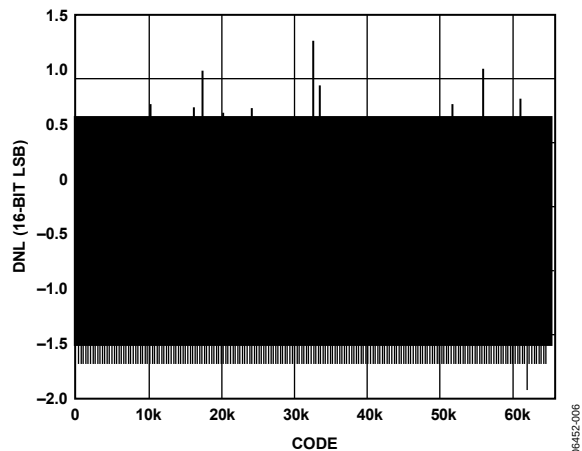


Figure 7. AD9779A Typical DNL

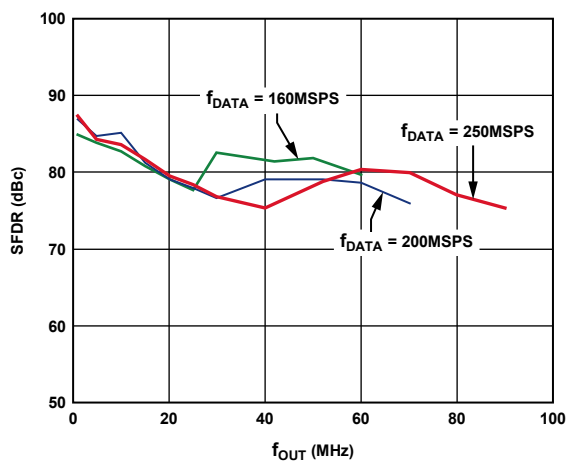


Figure 8. AD9779A In-Band SFDR vs.  $f_{OUT}$ , 1x Interpolation

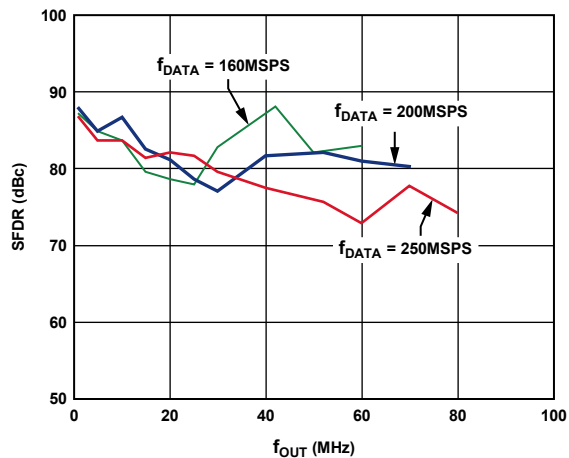


Figure 9. AD9779A In-Band SFDR vs.  $f_{OUT}$ , 2x Interpolation

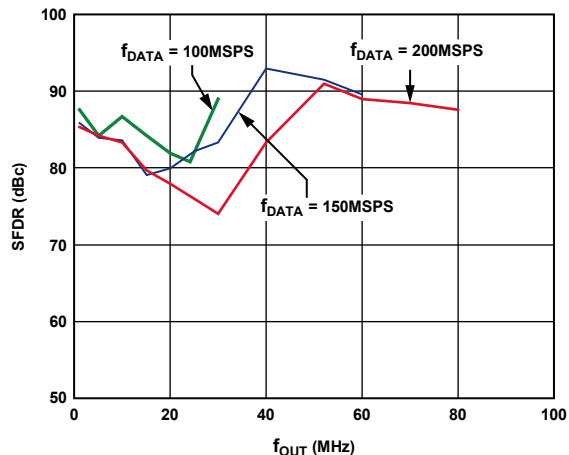


Figure 10. AD9779A In-Band SFDR vs.  $f_{OUT}$ , 4x Interpolation

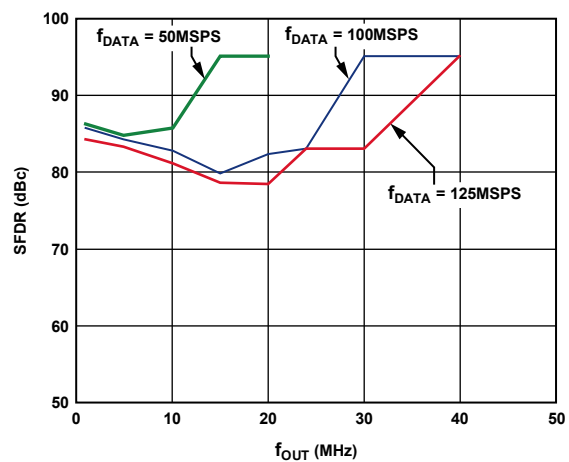


Figure 11. AD9779A In-Band SFDR vs.  $f_{OUT}$ , 8x Interpolation



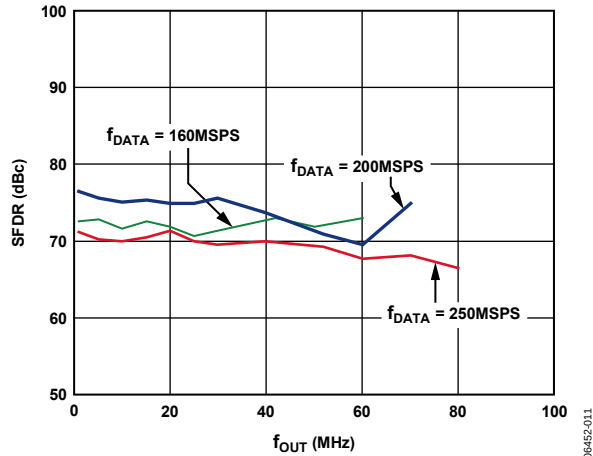


Figure 12. AD9779A Out-of-Band SFDR vs.  $f_{OUT}$ , 2x Interpolation

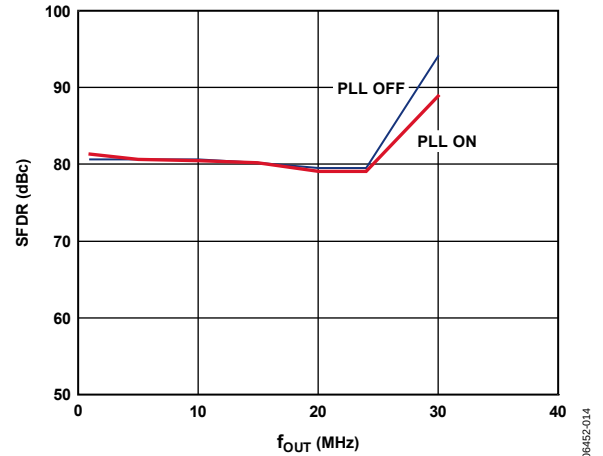


Figure 15. AD9779A In-Band SFDR vs.  $f_{OUT}$ , 4x Interpolation,  $f_{DATA} = 100$  MSPS, PLL On/Off

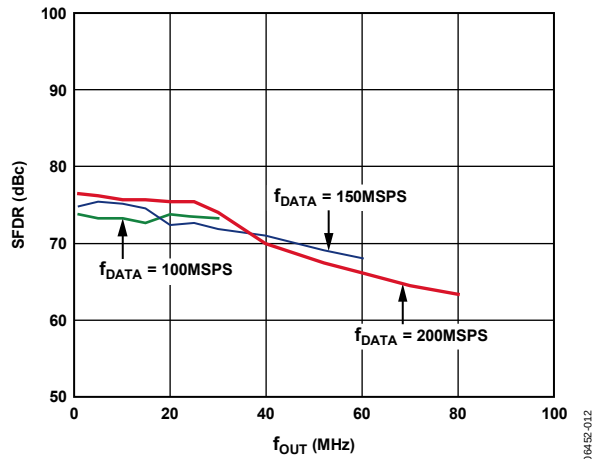


Figure 13. AD9779A Out-of-Band SFDR vs.  $f_{OUT}$ , 4x Interpolation

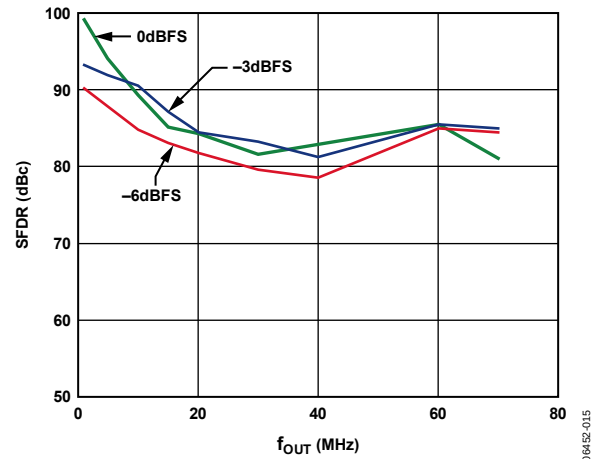


Figure 16. AD9779A In-Band SFDR vs.  $f_{OUT}$ , Digital Full Scale

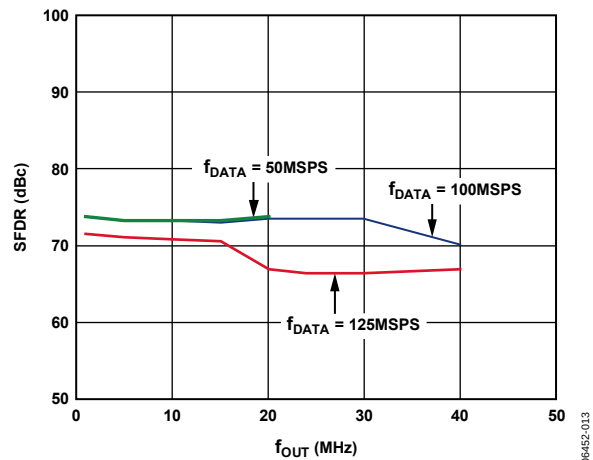


Figure 14. AD9779A Out-of-Band SFDR vs.  $f_{OUT}$ , 8x Interpolation

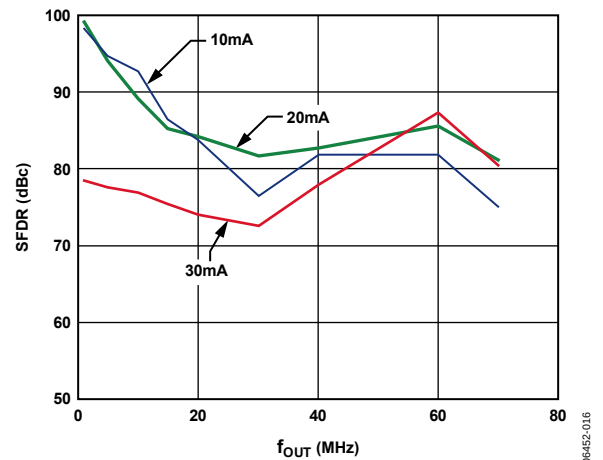


Figure 17. AD9779A In-Band SFDR vs.  $f_{OUT}$ , Output Full-Scale Current

# AD9776A/AD9778A/AD9779A

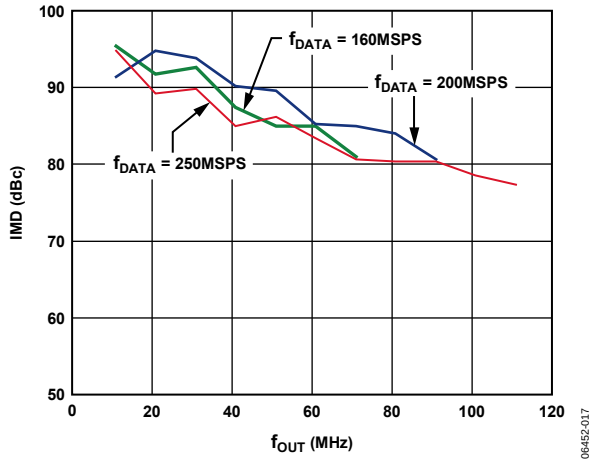


Figure 18. AD9779A Third-Order IMD vs.  $f_{OUT}$ , 1x Interpolation

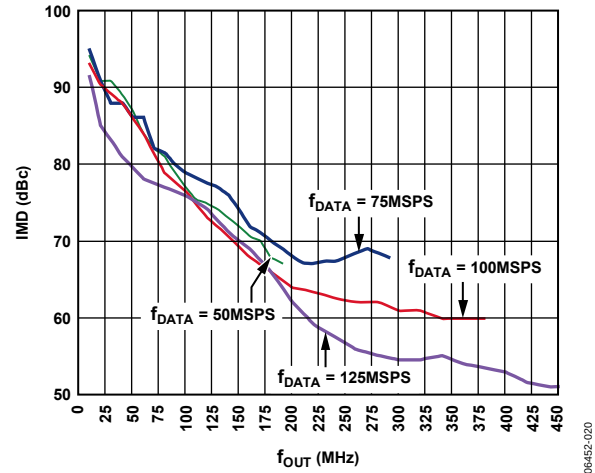


Figure 21. AD9779A Third-Order IMD vs.  $f_{OUT}$ , 8x Interpolation

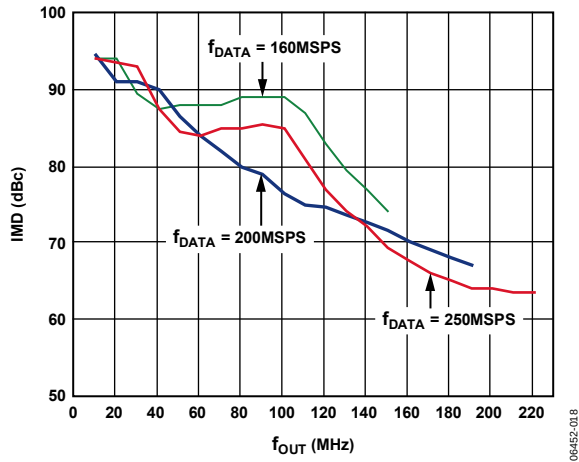


Figure 19. AD9779A Third-Order IMD vs.  $f_{OUT}$ , 2x Interpolation

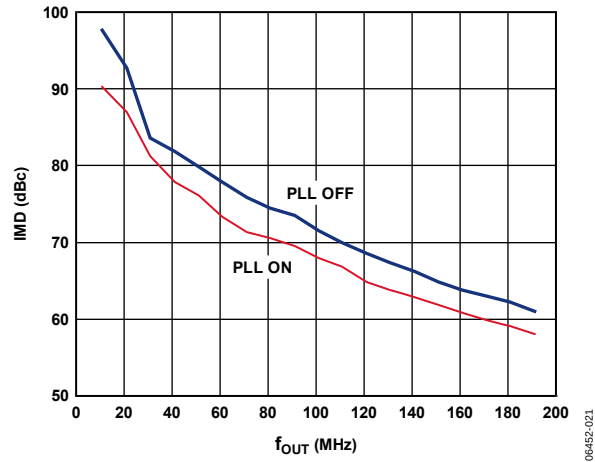


Figure 22. AD9779A Third-Order IMD vs.  $f_{OUT}$ , 4x Interpolation,  $f_{DATA} = 100$  MSPS, PLL On/Off

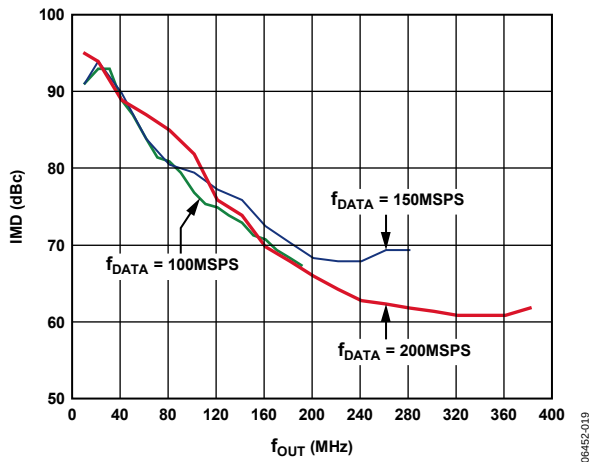


Figure 20. AD9779A Third-Order IMD vs.  $f_{OUT}$ , 4x Interpolation

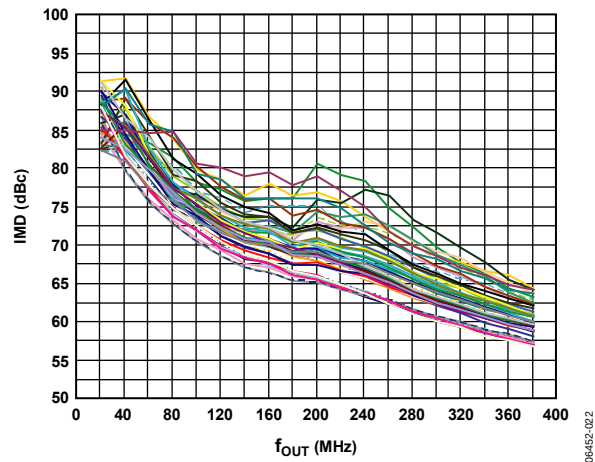


Figure 23. AD9779A Third-Order IMD vs.  $f_{OUT}$ , Over 50 Parts, 4x Interpolation,  $f_{DATA} = 200$  MSPS

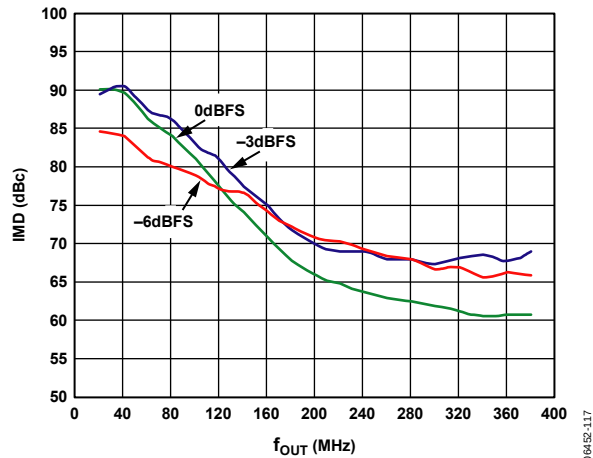


Figure 24. AD9779A IMD Performance vs.  $f_{OUT}$ , Digital Full-Scale Input Over Output Frequency, 4× Interpolation,  $f_{DATA} = 200$  MSPS

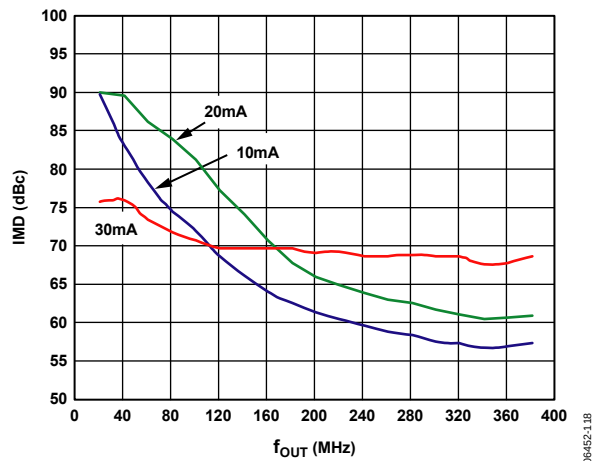


Figure 25. AD9779A IMD Performance vs.  $f_{OUT}$ , Full-Scale Output Current Over Output Frequency, 4× Interpolation,  $f_{DATA} = 200$  MSPS

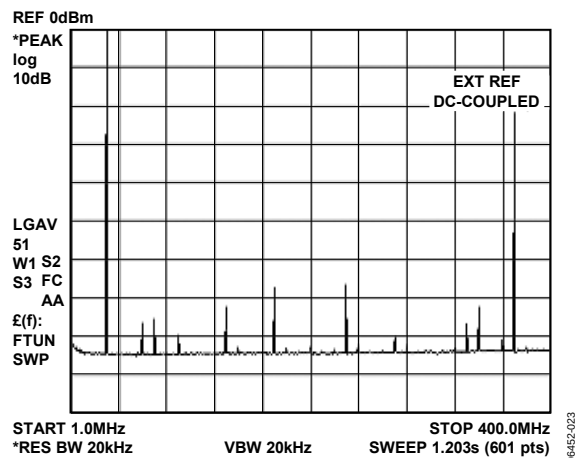


Figure 26. AD9779A Single Tone, 4× Interpolation,  $f_{DATA} = 100$  MSPS,  $f_{OUT} = 30$  MHz

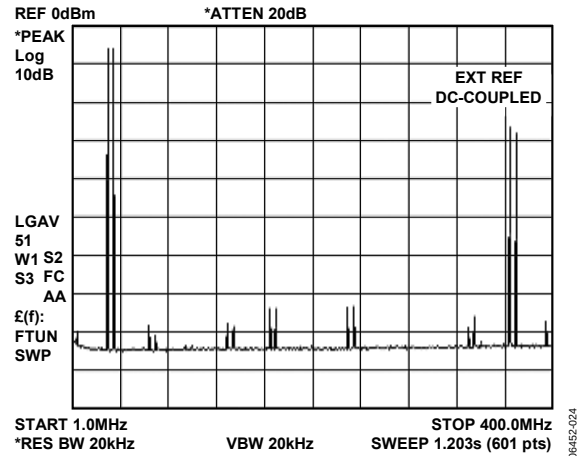


Figure 27. AD9779A Two-Tone Spectrum, 4× Interpolation,  $f_{DATA} = 100$  MSPS,  $f_{OUT} = 30$  MHz, 35 MHz

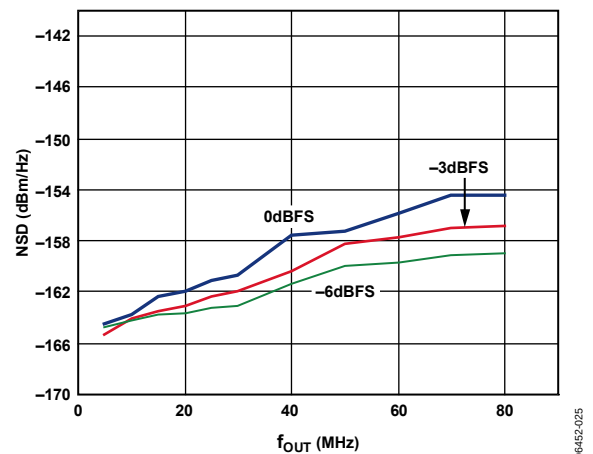


Figure 28. AD9779A Noise Spectral Density vs.  $f_{OUT}$ , Digital Full-Scale Over Output Frequency of Single-Tone Input, 2× Interpolation,  $f_{DATA} = 200$  MSPS

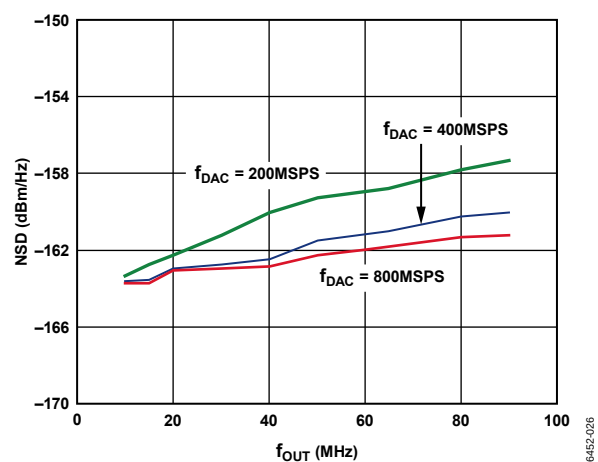


Figure 29. AD9779A Noise Spectral Density vs.  $f_{OUT}$ ,  $f_{DAC}$  Over Output Frequency for Eight-Tone Input with 500 kHz Spacing,  $f_{DATA} = 200$  MSPS

AD9776A/AD9778A/AD9779A

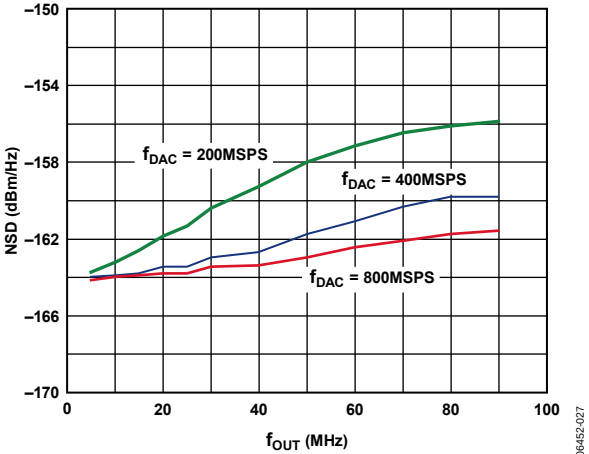


Figure 30. AD9779A Noise Spectral Density vs.  $f_{OUT}$ ,  $f_{DAC}$  Over Output Frequency with a Single-Tone Input at -6 dBFS

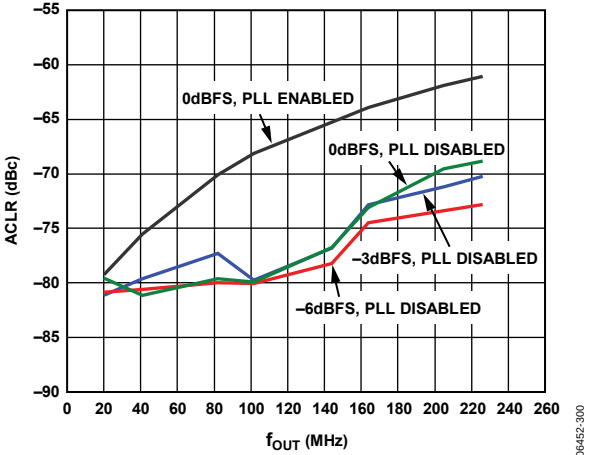


Figure 31. AD9779A ACLR for First Adjacent Band W-CDMA, 4× Interpolation,  $f_{DATA} = 122.88$  MSPS, On-Chip Modulation Translates Baseband Signal to IF

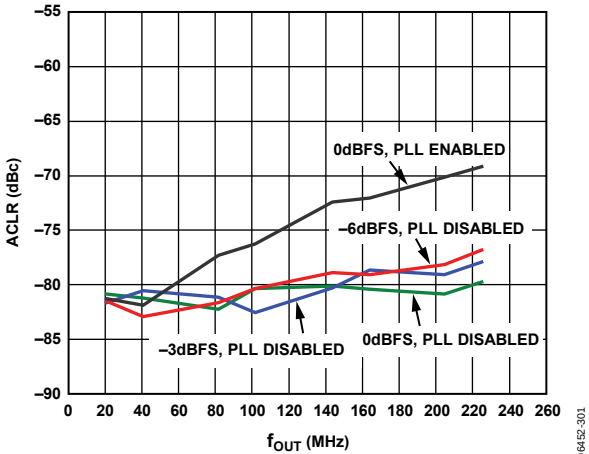


Figure 33. AD9779A ACLR for Second Adjacent Band W-CDMA, 4× Interpolation,  $f_{DATA} = 122.88$  MSPS, On-Chip Modulation Translates Baseband Signal to IF

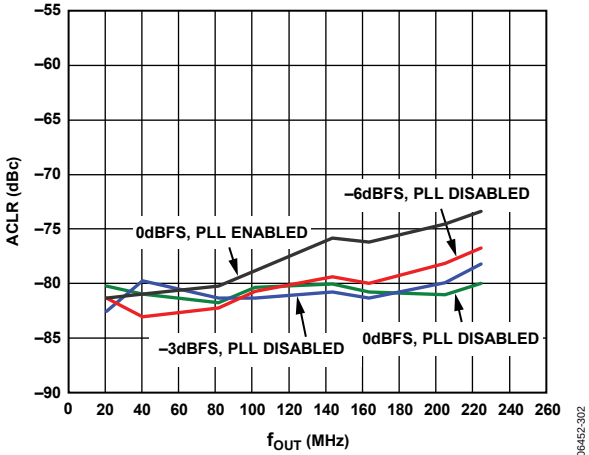


Figure 34. AD9779A ACLR for Third Adjacent Band W-CDMA, 4× Interpolation,  $f_{DATA} = 122.88$  MSPS, On-Chip Modulation Translates Baseband Signal to IF

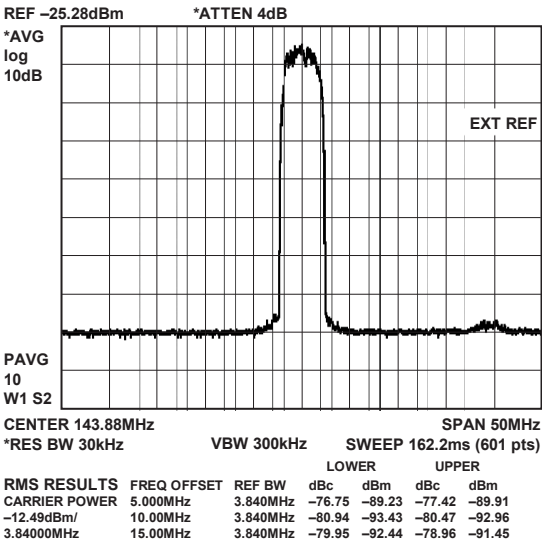


Figure 32. AD9779A W-CDMA Signal, 4× Interpolation,  $f_{DATA} = 122.88$  MSPS,  $f_{DAC}/4$  Modulation

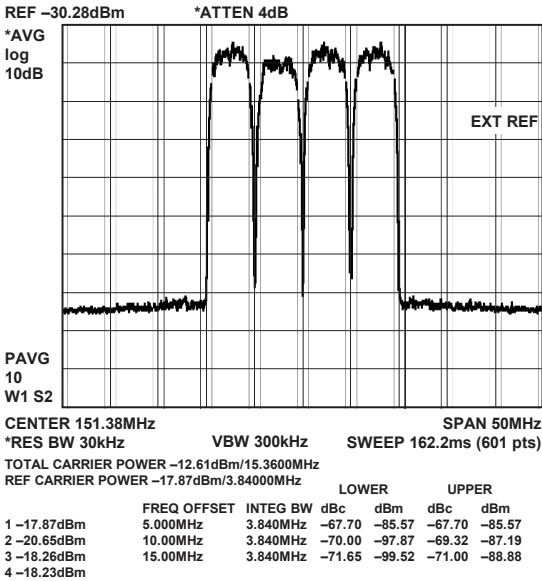


Figure 35. AD9779A Multicarrier W-CDMA Signal, 4× Interpolation,  $f_{DAC} = 122.88$  MSPS,  $f_{DAC}/4$  Modulation

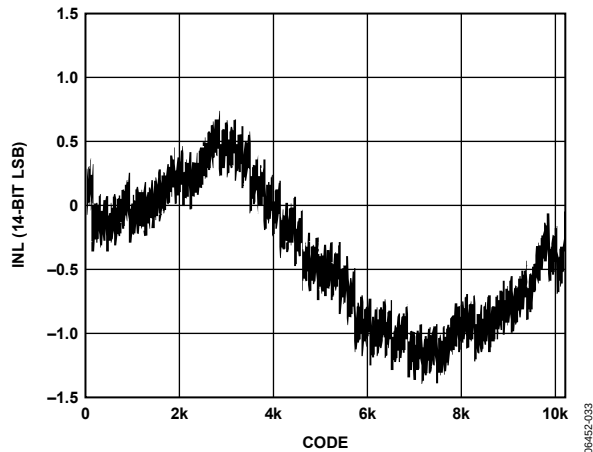


Figure 36. AD9778A Typical INL

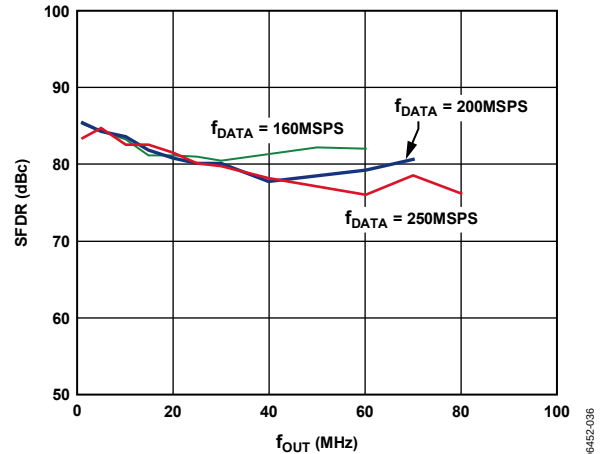


Figure 39. AD9778A In-Band SFDR vs.  $f_{OUT}$ ,  
2x Interpolation

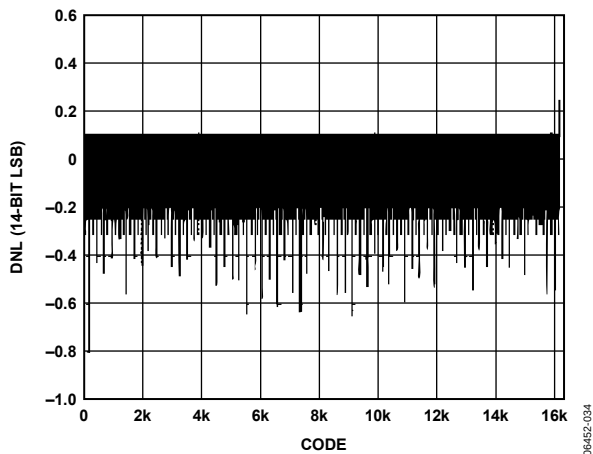


Figure 37. AD9778A Typical DNL

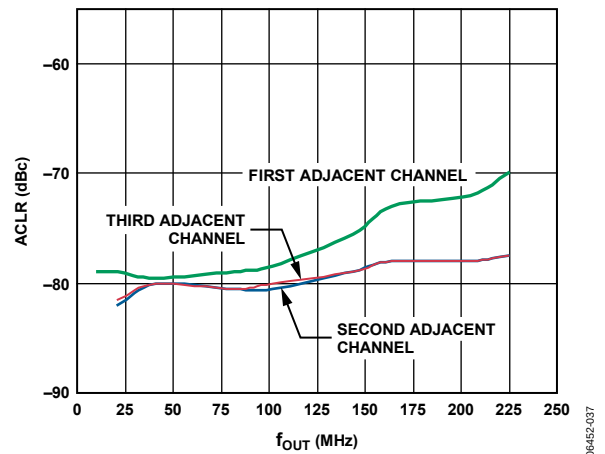


Figure 40. AD9778A ACLR, Single Carrier W-CDMA,  
4x Interpolation,  $f_{DATA} = 122.88$  MSPS, Amplitude =  $-3$  dBFS

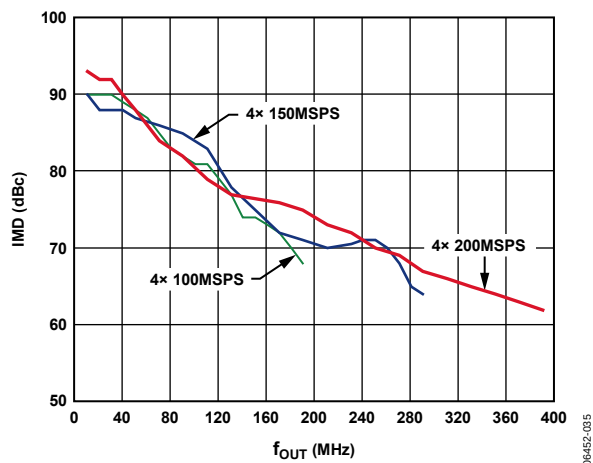


Figure 38. AD9778A IMD vs.  $f_{OUT}$ ,  
4x Interpolation

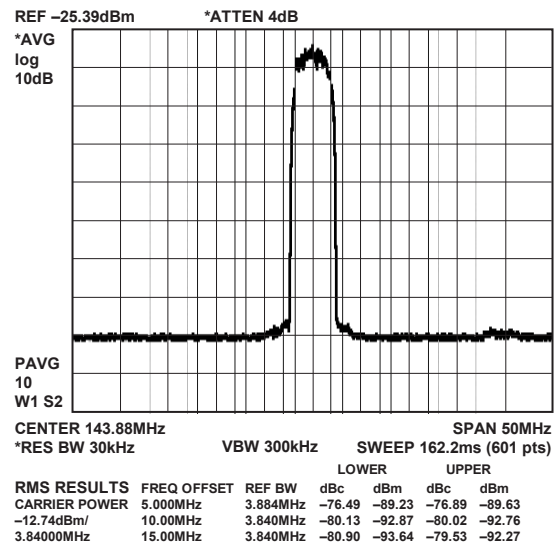


Figure 41. AD9778A ACLR,  
 $f_{DATA} = 122.88$  MSPS, 4x Interpolation,  $f_{DAC}/4$  Modulation

# AD9776A/AD9778A/AD9779A

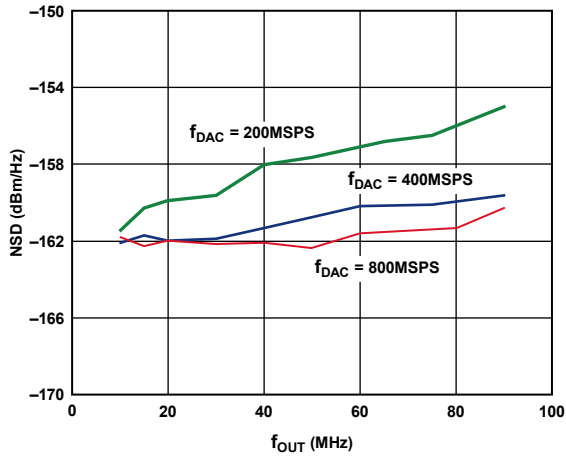


Figure 42. AD9778A Noise Spectral Density vs.  $f_{OUT}$  for Eight-Tone Input with 500 kHz Spacing,  $f_{DATA} = 200$  MSPS

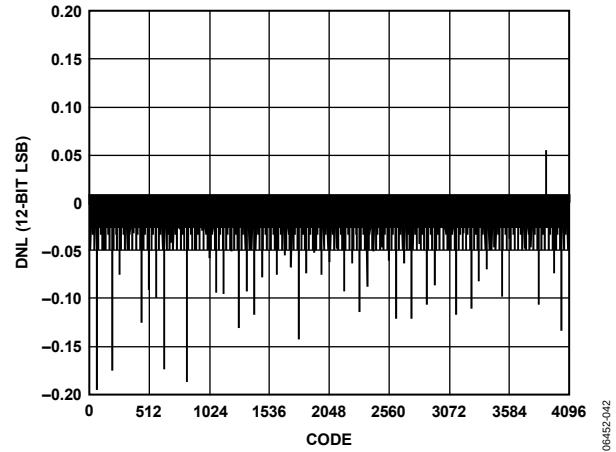


Figure 45. AD9776A Typical DNL

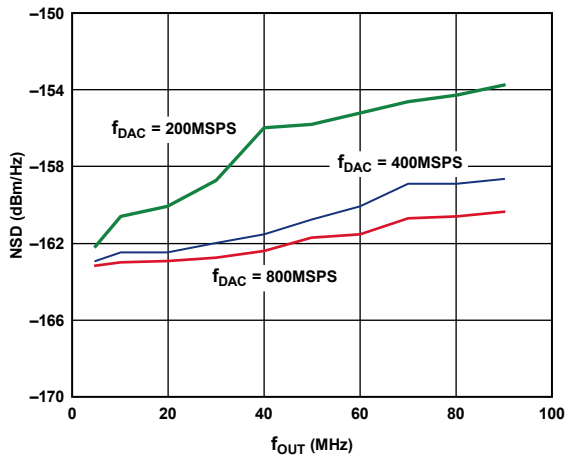


Figure 43. AD9778A Noise Spectral Density vs.  $f_{OUT}$  with Single-Tone Input at -6 dBFS,  $f_{DATA} = 200$  MSPS

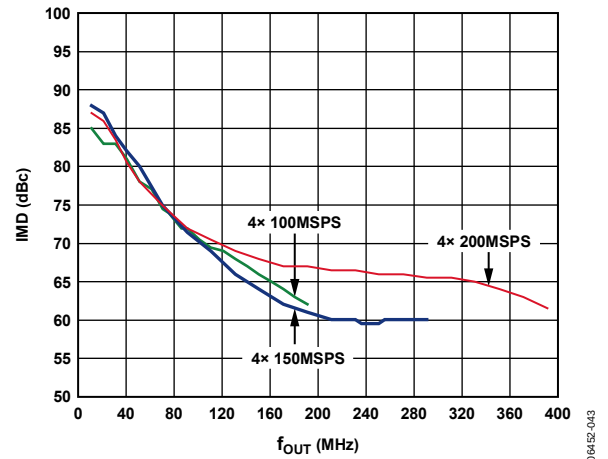


Figure 46. AD9776A IMD vs.  $f_{OUT}$ , 4x Interpolation

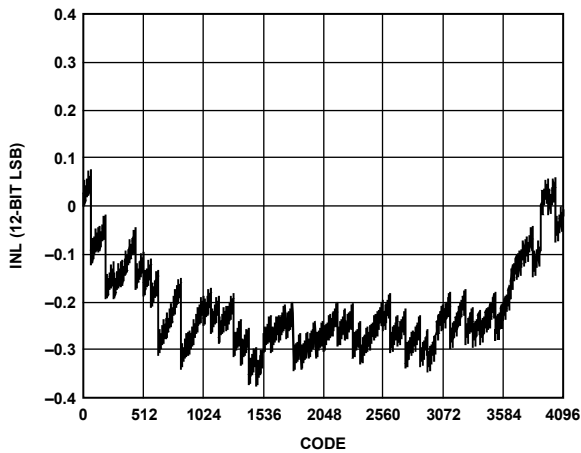


Figure 44. AD9776A Typical INL

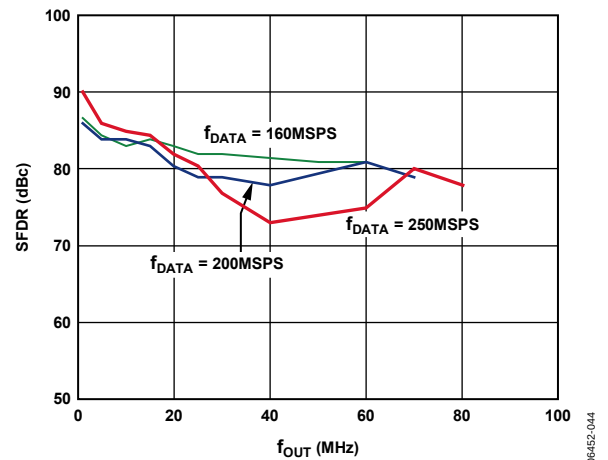


Figure 47. AD9776A In-Band SFDR vs.  $f_{OUT}$ , 2x Interpolation

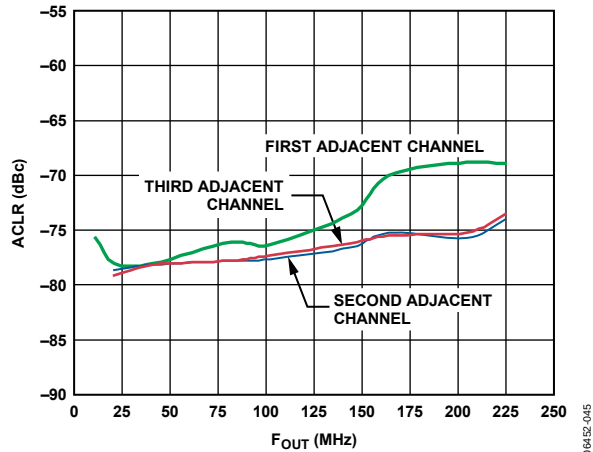


Figure 48. AD9776A ACLR vs.  $f_{OUT}$ ,  
 $f_{DATA} = 122.88 \text{ MSPS}$ ,  $4\times$  Interpolation,  $f_{DAC}/4$  Modulation

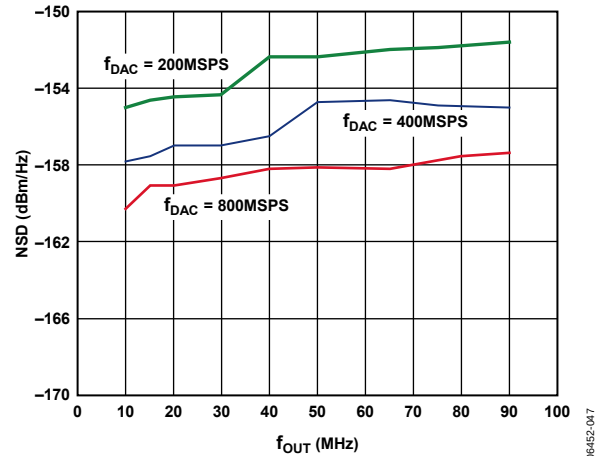


Figure 50. AD9776A Noise Spectral Density vs.  $f_{OUT}$ ,  
Eight-Tone Input with 500 kHz Spacing,  $f_{DATA} = 200 \text{ MSPS}$

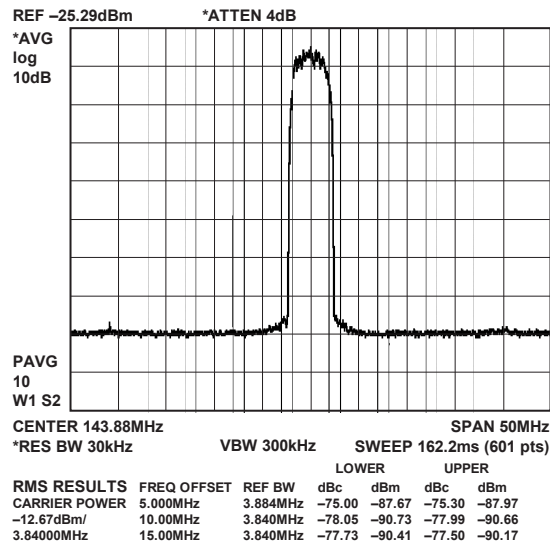


Figure 49. AD9776A Single Carrier W-CDMA,  
 $4\times$  Interpolation,  $f_{DATA} = 122.88 \text{ MSPS}$ , Amplitude =  $-3 \text{ dBFS}$

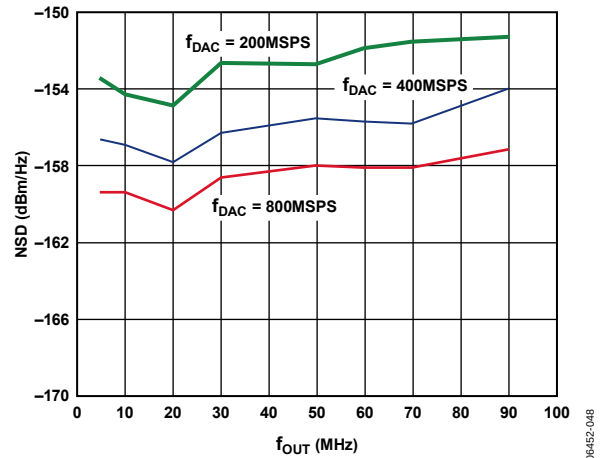


Figure 51. AD9776A Noise Spectral Density vs.  $f_{OUT}$ ,  
Single-Tone Input at  $-6 \text{ dBFS}$ ,  $f_{DATA} = 200 \text{ MSPS}$

## TERMINOLOGY

### Integral Nonlinearity (INL)

INL is defined as the maximum deviation of the actual analog output from the ideal output, determined by a straight line drawn from zero scale to full scale.

### Differential Nonlinearity (DNL)

DNL is the measure of the variation in analog value, normalized to full scale, associated with a 1 LSB change in digital input code.

### Monotonicity

A DAC is monotonic if the output either increases or remains constant as the digital input increases.

### Offset Error

The deviation of the output current at Code 0 from the ideal of zero is called offset error. For  $I_{OUTA}$ , 0 mA output is expected when the inputs are all 0s. For  $I_{OUTB}$ , 0 mA output is expected when all inputs are set to 1s.

### Gain Error

Gain error is the difference between the actual and the ideal output spans. The actual span is determined by the difference between the full-scale output and the bottom-scale output.

### Output Compliance Range

Output compliance range is the range of allowable voltage at the output of a current-output DAC. Operation beyond the maximum compliance limits may cause either output stage saturation or breakdown, resulting in nonlinear performance.

### Temperature Drift

Temperature drift is specified as the maximum change from the ambient (25°C) value to the value at either  $T_{MIN}$  or  $T_{MAX}$ . For offset and gain drift, the drift is reported in ppm of full-scale range (FSR) per degree Celsius. For reference drift, the drift is reported in ppm per degree Celsius.

### Power Supply Rejection (PSR)

PSR is the maximum change in the full-scale output as the supplies are varied from minimum to maximum specified voltages.

### Settling Time

Settling time is the time required for the output to reach and remain within a specified error band around its final value, measured from the start of the output transition.

### In-Band Spurious-Free Dynamic Range (SFDR)

In-band SFDR is the difference, in decibels, between the peak amplitude of the output signal and the peak spurious signal between dc and the frequency equal to half the input data rate.

### Out-of-Band Spurious-Free Dynamic Range (SFDR)

Out-of-band SFDR is the difference, in decibels, between the peak amplitude of the output signal and the peak spurious signal within the band that starts at the frequency of the input data rate and ends at the Nyquist frequency of the DAC output sample rate. Normally, energy in this band is rejected by the interpolation filters. This specification, therefore, defines how well the interpolation filters work and the effect of other parasitic coupling paths to the DAC output.

### Total Harmonic Distortion (THD)

THD is the ratio of the rms sum of the first six harmonic components to the rms value of the measured fundamental. It is expressed as a percentage or in decibels.

### Signal-to-Noise Ratio (SNR)

SNR is the ratio of the rms value of the measured output signal to the rms sum of all other spectral components below the Nyquist frequency, excluding the first six harmonics and dc. The value for SNR is expressed in decibels.

### Interpolation Filter

If the digital inputs to the DAC are sampled at a multiple rate of  $f_{DATA}$  (interpolation rate), a digital filter can be constructed that has a sharp transition band near  $f_{DATA}/2$ . Images that typically appear around  $f_{DAC}$  (output data rate) can be greatly suppressed.

### Adjacent Channel Leakage Ratio (ACLR)

ACLR is the ratio in dBc of the measured power within a channel relative to its adjacent channel.

### Complex Image Rejection

In a traditional two-part upconversion, two images are created around the second IF frequency. These images have the effect of wasting transmitter power and system bandwidth. By placing the real part of a second complex modulator in series with the first complex modulator, either the upper or lower frequency image near the second IF can be rejected.



## THEORY OF OPERATION

The AD9776A/AD9778A/AD9779A have many features that make them highly suited for wired and wireless communications systems. The dual digital signal path and dual DAC structure allow an easy interface with common quadrature modulators when designing single sideband transmitters. The speed and performance of the parts allow wider bandwidths and more carriers to be synthesized than in previously available DACs. The digital engine uses an innovative filter architecture that combines the interpolation with a digital quadrature modulator. This allows the parts to perform digital quadrature frequency upconversions. The on-chip synchronization circuitry enables multiple devices to be synchronized to each other, or to a system clock.

### DIFFERENCES BETWEEN AD9776/AD9778/ AD9779 AND AD9776A/AD9778A/AD9779A

#### **REFCLK Maximum Frequency vs. Supply**

With some restrictions on the DVDD18 and CVDD18 power supplies, the AD9776A/AD9778A/AD9779A support a maximum sample rate of 1100 MHz. Table 2 lists the valid operating frequencies vs. power supply voltage.

#### **REFCLK Amplitude**

With a differential sinusoidal clock applied to REFCLK, the PLL on the AD9776/AD9778/AD9779 does not achieve optimal noise performance unless the REFCLK differential amplitude is increased to 2 V p-p. Note that if an LVPECL driver is used on the AD9776/AD9778/AD9779, the PLL exhibits optimal performance if the REFCLK amplitude is well within LVPECL specifications (<1.6 V p-p differential). The design of the PLL on the AD9779A has been improved so that even with a sinusoidal clock, the PLL still achieves optimal amplitude if the swing is 1.6 V p-p.

#### **PLL Lock Ranges**

The individual lock ranges for the AD9776A/AD9778A/AD9779A PLL are wider than those for the AD9776/AD9778/AD9779.

This means that the AD9776A/AD9778A/AD9779A PLL remains in lock in a given range over a wider temperature range than the AD9776/AD9778/AD9779. See Table 23 for PLL lock ranges for the AD9776A/AD9778A/AD9779A.

#### **PLL Optimal Settings**

The optimal settings for the AD9776/AD9778/AD9779 differ from the AD9776A/AD9778A/AD9779A. Refer to the PLL Bias Settings section for complete details.

#### **Input Data Delay Line, Manual and Automatic Correction Modes**

The AD9776A/AD9778A/AD9779A can be programmed to not only sense when the timing margin on the input data falls below a preset threshold but to also take action. The device can be programmed to either set the IRQ (pin and register) or automatically reoptimize the timing input data timing.

#### **Input Data Timing**

See Table 28 for timing specifications vs. temperature. The input data timing specifications (setup and hold) are different for the AD9776A/AD9778A/AD9779A than they are for the AD9776/AD9778/AD9779.

#### **DATACLK Delay Range**

In the AD9776/AD9778/AD9779, the input data delay was controlled by Register 0x04, Bits[7:4]. At 25°C, the delay was stepped by approximately 180 ps/increment. In the AD9776A/AD9778A/AD9779A, an extra bit has been added, which effectively doubles the delay range. This bit is now located at Register 0x01, Bit 1. The increment/step on the AD9776A/AD9778A/AD9779A remains at ~180 ps.

#### **Version Register**

The version register (Register 0x1F) of the AD9776A/AD9778A/AD9779A reads a value of 0x07. The version register of the AD9776/AD9778/AD9779 reads a value of 0x03.

**Table 10. Register Value Differences Between AD9776/AD9778/AD9779 and AD9776A/AD9778A/AD9779A**

| Part No.                | PLL Loop Bandwidth,<br>Register 0x0A, Bits[4:0] | PLL Bias,<br>Register 0x09, Bits[2:0] | VCO Control Voltage,<br>Register 0x0A, Bits[7:5] | PLL VCO Drive,<br>Register 0x08, Bits[1:0] |
|-------------------------|-------------------------------------------------|---------------------------------------|--------------------------------------------------|--------------------------------------------|
| AD9776/AD9778/AD9779    | 11111                                           | 111                                   | 010                                              | 00                                         |
| AD9776A/AD9778A/AD9779A | 01111                                           | 011                                   | 011                                              | 11                                         |

## 3-WIRE INTERFACE

The 3-wire port is a flexible, synchronous serial communications port allowing easy interface to many industry-standard micro-controllers and microprocessors. The port is compatible with most synchronous transfer formats, including both the Motorola SPI and Intel® SSR protocols.

The interface allows read and write access to all registers that configure the AD9776A/AD9778A/AD9779A. Single- or multiple-byte transfers are supported, as well as MSB-first or LSB-first transfer formats. Serial data input/output can be accomplished through a single bidirectional pin (SDIO) or through two unidirectional pins (SDIO/SDO).

The serial port configuration is controlled by Register 0x00, Bits[7:6]. It is important to note that any change made to the serial port configuration occurs immediately upon writing to the last bit of this byte. Therefore, it is possible with a multibyte transfer to write to this register and change the configuration in the middle of a communication cycle. Care must be taken to compensate for the new configuration within the remaining bytes of the current communication cycle.

Use of a single-byte transfer when changing the serial port configuration is recommended to prevent unexpected device behavior.

As described in this section, all serial port data is transferred to/from the device in synchronization with the SCLK pin. If synchronization is lost, the device has the ability to asynchronously terminate an I/O operation, putting the serial port controller into a known state and, thereby, regaining synchronization.




Figure 52. 3-Wire Interface Port

## GENERAL OPERATION OF THE SERIAL INTERFACE

There are two phases of a communication cycle with the AD9776A/AD9778A/AD9779A. Phase 1 is the instruction cycle (the writing of an instruction byte into the device), coinciding with the first eight SCLK rising edges. The instruction byte provides the serial port controller with information regarding the data transfer cycle, which is Phase 2 of the communication cycle. The Phase 1 instruction byte defines whether the upcoming data transfer is a read or write, the number of bytes in the data transfer, and the starting register address for the first byte of the data transfer. The first eight SCLK rising edges of each communication cycle are used to write the instruction byte into the device.

A logic high on the CSB pin followed by a logic low resets the 3-wire interface port timing to the initial state of the instruction cycle. From this state, the next eight rising SCLK edges represent the instruction bits of the current I/O operation, regardless of the state of the internal registers or the other signal levels at the inputs to the 3-wire interface port. If the 3-wire interface port is in an instruction cycle or a data transfer cycle, none of the present data is written.

The remaining SCLK edges are for Phase 2 of the communication cycle. Phase 2 is the actual data transfer between the device and the system controller. Phase 2 of the communication cycle is a transfer of one, two, three, or four data bytes, as determined by the instruction byte. Using one multibyte transfer is preferred. Single-byte data transfers are useful in reducing CPU overhead when register access requires only one byte. Registers change immediately upon writing to the last bit of each transfer byte.

## INSTRUCTION BYTE

See Table 11 for information contained in the instruction byte.

Table 11. 3-Wire Interface Instruction Byte

| MSB |    |    |    |    |    | LSB |    |
|-----|----|----|----|----|----|-----|----|
| I7  | I6 | I5 | I4 | I3 | I2 | I1  | I0 |
| R/W | N1 | N0 | A4 | A3 | A2 | A1  | A0 |

R/W, Bit 7 of the instruction byte, determines whether a read or a write data transfer occurs after the instruction byte write. Logic 1 indicates a read operation. Logic 0 indicates a write operation.

N1 and N0, Bit 6 and Bit 5 of the instruction byte, determine the number of bytes to be transferred during the data transfer cycle. The translation for the number of bytes to be transferred is listed in Table 12.

A4, A3, A2, A1, and A0—Bit 4, Bit 3, Bit 2, Bit 1, and Bit 0, respectively, of the instruction byte—determine the register that is accessed during the data transfer portion of the communication cycle. For multibyte transfers, this address is the starting byte address. The remaining register addresses are generated by the device, based on the LSB-first bit (Register 0x00, Bit 6).

Table 12. Byte Transfer Count

| N1 | N0 | Description          |
|----|----|----------------------|
| 0  | 0  | Transfer one byte    |
| 0  | 1  | Transfer two bytes   |
| 1  | 0  | Transfer three bytes |
| 1  | 1  | Transfer four bytes  |

## SERIAL INTERFACE PORT PIN DESCRIPTIONS

### Serial Clock (SCLK)

The serial clock pin synchronizes data to and from the device and controls the internal state machines. The maximum frequency of SCLK is 40 MHz. All data input is registered on the rising edge of SCLK. All data is driven out on the falling edge of SCLK.

### Chip Select (CSB)

Active low input starts and gates a communication cycle. It allows more than one device to be used on the same serial communication lines. The SDO and SDIO pins go to a high impedance state when this input is high. Chip select should stay low during the entire communication cycle.

### Serial Data I/O (SDIO)

Data is always written into the device on this pin. However, this pin can be used as a bidirectional data line. The configuration of this pin is controlled by Register 0x00, Bit 7. The default is Logic 0, configuring the SDIO pin as unidirectional.

### Serial Data Out (SDO)

Data is read from this pin for protocols that use separate lines for transmitting and receiving data. In the case where the device operates in a single bidirectional I/O mode, this pin does not output data and is set to a high impedance state.

## MSB/LSB TRANSFERS

The serial port can support both MSB-first and LSB-first data formats. This functionality is controlled by the LSB-/MSB-first register bit (Register 0x00, Bit 6). The default is MSB-first format (LSB/MSB first = 0).

When MSB-first format is selected (LSB/MSB first = 0), the instruction and data bit must be written from MSB to LSB. Multibyte data transfers in MSB-first format start with an instruction byte that includes the register address of the most significant data byte. Subsequent data bytes should follow from high address to low address. In MSB-first mode, the serial port internal byte address generator decrements for each data byte of the multibyte communication cycle.

When LSB/MSB first = 1 (LSB first) the instruction and data bit must be written from LSB to MSB. Multibyte data transfers in LSB-first format start with an instruction byte that includes the register address of the least significant data byte, followed by multiple data bytes. The serial port internal byte address generator increments for each byte of the multibyte communication cycle.

The serial port controller data address decrements from the data address written toward 0x00 for multibyte I/O operations if the MSB-first format is active. The serial port controller address increments from the data address written toward 0x1F for multibyte I/O operations if the LSB-first format is active.

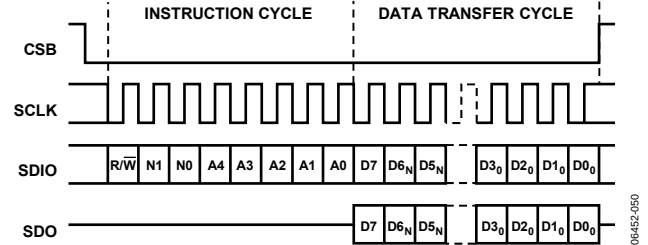


Figure 53. Serial Register Interface Timing, MSB First

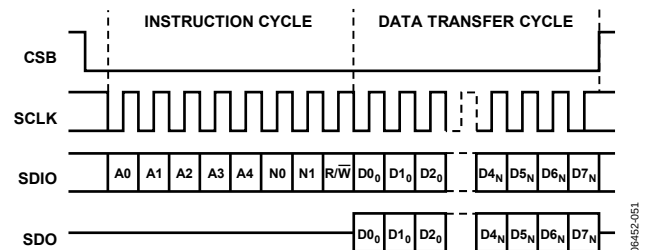


Figure 54. Serial Register Interface Timing, LSB First

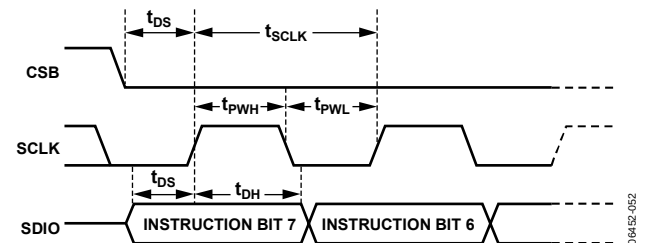


Figure 55. Timing Diagram for 3-Wire Interface Register Write

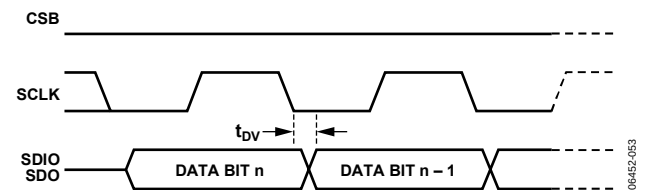


Figure 56. Timing Diagram for 3-Wire Interface Register Read

# AD9776A/AD9778A/AD9779A

## 3-WIRE INTERFACE REGISTER MAP

Note that all unused register bits should be kept at the device default values.

Table 13.

| Register Name    | Address      |          | Bit 7                                | Bit 6                            | Bit 5                     | Bit 4                       | Bit 3                        | Bit 2                        | Bit 1                          | Bit 0                  | Def. |
|------------------|--------------|----------|--------------------------------------|----------------------------------|---------------------------|-----------------------------|------------------------------|------------------------------|--------------------------------|------------------------|------|
|                  | Hex          | Decimal  |                                      |                                  |                           |                             |                              |                              |                                |                        |      |
| Comm             | 0x00         | 00       | SDIO bidirectional                   | LSB/MSB first                    | Software reset            | Power-down mode             | Auto power-down enable       |                              | PLL lock indicator (read only) |                        | 0x00 |
| Digital Control  | 0x01         | 01       | Interpolation Factor[1:0]            |                                  |                           | Filter Modulation Mode[3:0] |                              |                              | DATACLK Delay[4]               | Zero stuffing enable   | 0x00 |
|                  | 0x02         | 02       | Data format                          | Single port                      | Real mode                 | DATACLK delay enable        | Inverse sinc enable          | DATACLK invert               | TxEnable invert                | Q first                | 0x00 |
| Sync Control     | 0x03         | 03       | DATACLK delay mode                   | Reserved (set to 1)              | DATACLK Divide[1:0]       |                             | Data Timing Margin[3:0]      |                              |                                |                        | 0x00 |
|                  | 0x04         | 04       | DATACLK Delay[3:0]                   |                                  |                           |                             | SYNC_O Divide[2:0]           |                              |                                | SYNC_O Delay[4]        | 0x00 |
|                  | 0x05         | 05       | SYNC_O Delay[3:0]                    |                                  |                           |                             | SYNC_I Ratio[2:0]            |                              |                                | SYNC_I Delay[4]        | 0x00 |
|                  | 0x06         | 06       | SYNC_I Delay[3:0]                    |                                  |                           |                             | SYNC_I Timing Margin[3:0]    |                              |                                |                        | 0x00 |
|                  | 0x07         | 07       | SYNC_I enable                        | SYNC_O enable                    | SYNC_O triggering edge    | Clock State[4:0]            |                              |                              |                                |                        | 0x00 |
| PLL Control      | 0x08         | 08       | PLL Band Select[5:0]                 |                                  |                           |                             |                              |                              | PLL VCO Drive[1:0]             |                        | 0xE7 |
|                  | 0x09         | 09       | PLL enable                           | PLL VCO Divide Ratio[1:0]        |                           | PLL Loop Divide Ratio[1:0]  |                              | PLL Bias[2:0]                |                                |                        | 0x52 |
| Misc. Control    | 0x0A         | 10       | VCO Control Voltage[2:0] (read only) |                                  |                           | PLL Loop Bandwidth[4:0]     |                              |                              |                                |                        | 0x1F |
| I DAC Control    | 0x0B         | 11       | I DAC Gain Adjustment[7:0]           |                                  |                           |                             |                              |                              |                                |                        | 0xF9 |
|                  | 0x0C         | 12       | I DAC sleep                          | I DAC power-down                 |                           |                             |                              |                              | I DAC Gain Adjustment[9:8]     |                        | 0x01 |
| Aux DAC1 Control | 0x0D         | 13       | Auxiliary DAC1 Data[7:0]             |                                  |                           |                             |                              |                              |                                |                        | 0x00 |
|                  | 0x0E         | 14       | Auxiliary DAC1 sign                  | Auxiliary DAC1 current direction | Auxiliary DAC1 power-down |                             |                              |                              | Auxiliary DAC1 Data[9:8]       |                        | 0x00 |
| Q DAC Control    | 0x0F         | 15       | Q DAC Gain Adjustment[7:0]           |                                  |                           |                             |                              |                              |                                |                        | 0xF9 |
|                  | 0x10         | 16       | Q DAC sleep                          | Q DAC power-down                 |                           |                             |                              |                              | Q DAC Gain Adjustment[9:8]     |                        | 0x01 |
| Aux DAC2 Control | 0x11         | 17       | Auxiliary DAC2 Data[7:0]             |                                  |                           |                             |                              |                              |                                |                        | 0x00 |
|                  | 0x12         | 18       | Auxiliary DAC2 sign                  | Auxiliary DAC2 current direction | Auxiliary DAC2 power-down |                             |                              |                              | Auxiliary DAC2 Data[9:8]       |                        | 0x00 |
|                  | 0x13 to 0x18 | 19 to 24 | Reserved                             |                                  |                           |                             |                              |                              |                                |                        |      |
| Interrupt        | 0x19         | 25       | Data timing error IRQ                | Sync timing error IRQ            |                           | Data timing error type      | Data timing error IRQ enable | Sync timing error IRQ enable |                                | Internal sync loopback | 0x00 |
| Version          | 0x1F         | 31       | Version[7:0]                         |                                  |                           |                             |                              |                              |                                |                        | 0x07 |

Table 14. 3-Wire Interface Register Description

| Register Name   | Register Address | Bits | Parameter                      | Function                                                                                                                                                             | Default |
|-----------------|------------------|------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Comm            | 0x00             | 7    | SDIO bidirectional             | 0: use SDIO pin as input data only.<br>1: use SDIO as both input and output data.                                                                                    | 0       |
|                 | 0x00             | 6    | LSB/MSB first                  | 0: first bit of serial data is MSB of data byte.<br>1: first bit of serial data is LSB of data byte.                                                                 | 0       |
|                 | 0x00             | 5    | Software reset                 | Bit must be written with a 1 and then 0 to soft reset the 3-wire interface register map.                                                                             | 0       |
|                 | 0x00             | 4    | Power-down mode                | 0: all circuitry is active.<br>1: disable all digital and analog circuitry, only 3-wire interface port is active.                                                    | 0       |
|                 | 0x00             | 3    | Auto power-down enable         | Controls auto power-down mode. See the Power-Down and Sleep Modes section.                                                                                           | 0       |
|                 | 0x00             | 1    | PLL lock indicator (read only) | 0: PLL is not locked.<br>1: PLL is locked.                                                                                                                           | 0       |
| Digital Control | 0x01             | 7:6  | Interpolation Factor[1:0]      | 00: 1× interpolation.<br>01: 2× interpolation.<br>10: 4× interpolation.<br>11: 8× interpolation.                                                                     | 00      |
|                 | 0x01             | 5:2  | Filter Modulation Mode[3:0]    | See Table 19 for filter modes.                                                                                                                                       | 0000    |
|                 | 0x01             | 1    | DATACLK Delay[4]               | Sets MSB of delay of REFCLK input to DATACLK output.                                                                                                                 | 0       |
|                 | 0x01             | 0    | Zero stuffing enable           | 0: zero stuffing off.<br>1: zero stuffing on.                                                                                                                        | 0       |
|                 | 0x02             | 7    | Data format                    | 0: twos compliment.<br>1: unsigned binary.                                                                                                                           | 0       |
|                 | 0x02             | 6    | Single port                    | 0: both P1D and P2D data ports enabled.<br>1: data for both DACs received on P1D data port.                                                                          | 0       |
|                 | 0x02             | 5    | Real mode                      | 0: enable Q path for signal processing.<br>1: disable Q path data (internal Q channel clocks disabled, I and Q modulators disabled).                                 | 0       |
|                 | 0x02             | 4    | DATACLK delay enable           | Enables the DATACLK delay feature. More details on this feature are shown in the Optimizing the Data Input Timing section.                                           | 0       |
|                 | 0x02             | 3    | Inverse sinc enable            | 0: inverse sinc filter disabled.<br>1: inverse sinc filter enabled.                                                                                                  | 0       |
|                 | 0x02             | 2    | DATACLK invert                 | 0: output DATACLK same phase as internal data sampling clock, DCLK_SMP signal.<br>1: output DATACLK opposite phase as internal data sampling clock, DCLK_SMP signal. | 0       |
|                 | 0x02             | 1    | TxEnable invert                | Inverts the polarity of Pin 39, the TXENABLE input pin (also functions as IQSELECT).                                                                                 | 0       |
|                 | 0x02             | 0    | Q first                        | 0: in interleaved mode, the I data precedes the Q data on the input port.<br>1: in interleaved mode, the Q data precedes the I data on the input port.               | 0       |

# AD9776A/AD9778A/AD9779A

| Register Name | Register Address | Bits | Parameter                 | Function                                                                                                                                                                                                                                                                                                                            | Default |
|---------------|------------------|------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Sync Control  | 0x03             | 7    | DATACLK delay mode        | 0: manual data timing error detect mode.<br>1: automatic data timing error detect mode.                                                                                                                                                                                                                                             | 0       |
|               | 0x03             | 6    | Reserved                  | Should always be set to 1.                                                                                                                                                                                                                                                                                                          | 0       |
|               | 0x03             | 5:4  | DATACLK Divide[1:0]       | DATACLK output divider value.<br>00: divide by 1.<br>01: divide by 2.<br>10: divide by 4.<br>11: divide by 1.                                                                                                                                                                                                                       | 00      |
|               | 0x03             | 3:0  | Data Timing Margin[3:0]   | Sets the timing margin required to prevent the data timing error IRQ bit from being asserted.                                                                                                                                                                                                                                       | 0000    |
|               | 0x04             | 7:4  | DATACLK Delay[3:0]        | Sets delay of REFCLK input to DATACLK output (see Table 29 for details).                                                                                                                                                                                                                                                            | 0000    |
|               | 0x04             | 3:1  | SYNC_O Divide[2:0]        | The frequency of the SYNC_O signal is equal to $f_{DAC}/N$ , where N is set as follows:<br>000: N = 32.<br>001: N = 16.<br>010: N = 8.<br>011: N = 4.<br>100: N = 2.<br>101: N = 1.<br>110: N = undefined.<br>111: N = undefined.                                                                                                   | 000     |
|               | 0x04             | 0    | SYNC_O Delay[4]           | The SYNC_O Delay[4:0] value programs the value of the delay line of the SYNC_O signal. The delay of SYNC_O is relative to REFCLK. The delay line resolution is 80 ps per step.<br>00000: nominal delay.<br>00001: adds 80 ps delay to SYNC_O.<br>00010: adds 160 ps delay to SYNC_O.<br>...<br>11111: Adds 2480 ps delay to SYNC_O. | 0       |
|               | 0x05             | 7:4  | SYNC_O Delay[3:0]         |                                                                                                                                                                                                                                                                                                                                     | 0000    |
|               | 0x05             | 3:1  | SYNC_I Ratio[2:0]         | This value controls the number of SYNC_I input pulses required to generate a synchronization pulse (see Table 30 for details).                                                                                                                                                                                                      | 000     |
|               | 0x05             | 0    | SYNC_I Delay[4]           | The SYNC_I Delay[4:0] value programs the value of the delay line of the SYNC_I signal. The delay line resolution is 80 ps per step.<br>00000: nominal delay.<br>00001: adds 80 ps delay to SYNC_I.<br>00010: adds 160 ps delay to SYNC_I.<br>...<br>11111: adds 2480 ps delay to SYNC_I.                                            | 0       |
|               | 0x06             | 7:4  | SYNC_I Delay[3:0]         |                                                                                                                                                                                                                                                                                                                                     | 0000    |
|               | 0x06             | 3:0  | SYNC_I Timing Margin[3:0] |                                                                                                                                                                                                                                                                                                                                     | 0000    |
|               | 0x07             | 7    | SYNC_I enable             | 1: enables the SYNC_I input.                                                                                                                                                                                                                                                                                                        | 0       |
|               | 0x07             | 6    | SYNC_O enable             | 1: enables the SYNC_O output.                                                                                                                                                                                                                                                                                                       | 0       |
|               | 0x07             | 5    | SYNC_O triggering edge    | 0: SYNC_O changes on REFCLK falling edge.<br>1: SYNC_O changes on REFCLK rising edge.                                                                                                                                                                                                                                               | 0       |
|               | 0x07             | 4:0  | Clock State[4:0]          | This value determines the state of the internal clock generation state machine upon synchronization.                                                                                                                                                                                                                                | 0       |

| Register Name    | Register Address | Bits | Parameter                            | Function                                                                                                                                                                                                                                                                                                                       | Default  |
|------------------|------------------|------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| PLL Control      | 0x08             | 7:2  | PLL Band Select[5:0]                 | This sets the operating frequency range of the VCO. For details (see Table 23).                                                                                                                                                                                                                                                | 111001   |
|                  | 0x08             | 1:0  | PLL VCO Drive[1:0]                   | Controls the signal strength of the VCO output. Set to 11 for optimal performance.                                                                                                                                                                                                                                             | 11       |
|                  | 0x09             | 7    | PLL enable                           | 0: PLL off, DAC sample clock is sourced directly by the REFCLK input.<br>1: PLL on, DAC clock synthesized internally from REFCLK input via PLL clock multiplier.                                                                                                                                                               | 0        |
|                  | 0x09             | 6:5  | PLL VCO Divide Ratio[1:0]            | Sets the value of the VCO output divider, which determines the ratio of the VCO output frequency to the DAC sample clock frequency, $f_{VCO}/f_{DACCLK}$ .<br>00: $f_{VCO}/f_{DACCLK} = 1$ .<br>01: $f_{VCO}/f_{DACCLK} = 2$ .<br>10: $f_{VCO}/f_{DACCLK} = 4$ .<br>11: $f_{VCO}/f_{DACCLK} = 8$ .                             | 10       |
|                  | 0x09             | 4:3  | PLL Loop Divide Ratio[1:0]           | Sets the value of the DACCLK divider, which determines the ratio of the DAC sample clock frequency to the REFCLK frequency, $f_{DACCLK}/f_{REFCLK}$ .<br>00: $f_{DACCLK}/f_{REFCLK} = 2$ .<br>01: $f_{DACCLK}/f_{REFCLK} = 4$ .<br>10: $f_{DACCLK}/f_{REFCLK} = 8$ .<br>11: $f_{DACCLK}/f_{REFCLK} = 16$ .                     | 10       |
|                  | 0x09             | 2:0  | PLL Bias[2:0]                        | Controls VCO bias current. Set to 011 for optimal performance.                                                                                                                                                                                                                                                                 | 010      |
| Misc. Control    | 0x0A             | 7:5  | VCO Control Voltage[2:0] (read only) | 000 to 111, proportional to voltage at VCO control voltage input, readback only. A value of 011 indicates the VCO centered in its frequency range.                                                                                                                                                                             | 000      |
|                  | 0x0A             | 4:0  | PLL Loop Bandwidth[4:0]              | Controls the bandwidth of the PLL filter. Increasing the value lowers the loop bandwidth. Set to 01111 for optimal performance.                                                                                                                                                                                                | 11111    |
| I DAC Control    | 0x0C             | 1:0  | I DAC Gain Adjustment[9:8]           | The I DAC Gain Adjustment[9:0] value is the I DAC 10-bit gain setting word. Bit 9 is the MSB and Bit 0 is the LSB.<br>0: I DAC on.<br>1: I DAC off, but reference remains powered.<br>0: I DAC on.<br>1: I DAC off.                                                                                                            | 01       |
|                  | 0x0B             | 7:0  | I DAC Gain Adjustment[7:0]           |                                                                                                                                                                                                                                                                                                                                | 11111001 |
|                  | 0x0C             | 7    | I DAC sleep                          |                                                                                                                                                                                                                                                                                                                                | 0        |
|                  | 0x0C             | 6    | I DAC power-down                     |                                                                                                                                                                                                                                                                                                                                | 0        |
| Aux DAC1 Control | 0x0E             | 1:0  | Auxiliary DAC1 Data[9:8]             | The auxiliary DAC 1 Data [9:0] value is the Aux DAC1 10-bit output current control word. Magnitude of the auxiliary DAC current increases with increasing value. Bit 9 is the MSB and Bit 0 is the LSB.<br>0: AUX1_P active.<br>1: AUX1_N active.<br>0: source.<br>1: sink.<br>0: auxiliary DAC1 on.<br>1: auxiliary DAC1 off. | 00       |
|                  | 0x0D             | 7:0  | Auxiliary DAC1 Data[7:0]             |                                                                                                                                                                                                                                                                                                                                | 00000000 |
|                  | 0x0E             | 7    | Auxiliary DAC1 sign                  |                                                                                                                                                                                                                                                                                                                                | 0        |
|                  | 0x0E             | 6    | Auxiliary DAC1 current direction     |                                                                                                                                                                                                                                                                                                                                | 0        |
|                  | 0x0E             | 5    | Auxiliary DAC1 power-down            |                                                                                                                                                                                                                                                                                                                                | 0        |
| Q DAC Control    | 0x10             | 1:0  | Q DAC Gain Adjustment[9:8]           | The Q DAC Gain Adjustment[9:0] value is the Q DAC 10-bit gain setting word. Bit 9 is the MSB and Bit 0 is the LSB.<br>0: Q DAC on.<br>1: Q DAC off.<br>0: Q DAC on.<br>1: Q DAC off.                                                                                                                                           | 01       |
|                  | 0x0F             | 7:0  | Q DAC Gain Adjustment[7:0]           |                                                                                                                                                                                                                                                                                                                                | 11111001 |
|                  | 0x10             | 7    | Q DAC sleep                          |                                                                                                                                                                                                                                                                                                                                | 0        |
|                  | 0x10             | 6    | Q DAC power-down                     |                                                                                                                                                                                                                                                                                                                                | 0        |

# AD9776A/AD9778A/AD9779A

| Register Name    | Register Address | Bits | Parameter                        | Function                                                                                                                                                                                                                                                                                                              | Default  |
|------------------|------------------|------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| AUX DAC2 Control | 0x12             | 1:0  | Auxiliary DAC2 Data[9:8]         | Auxiliary DAC2 Data[9:0] is the 10-bit output current control word. Magnitude of the auxiliary DAC current increases with increasing value. Bit 9 is the MSB and Bit 0 is the LSB.<br><br>0: AUX2_P active.<br>1: AUX2_N active.<br><br>0: source.<br>1: sink.<br><br>0: auxiliary DAC2 on.<br>1: auxiliary DAC2 off. | 00       |
|                  | 0x11             | 7:0  | Auxiliary DAC2 Data[7:0]         |                                                                                                                                                                                                                                                                                                                       | 00000000 |
|                  | 0x12             | 7    | Auxiliary DAC2 sign              |                                                                                                                                                                                                                                                                                                                       | 0        |
|                  | 0x12             | 6    | Auxiliary DAC2 current direction |                                                                                                                                                                                                                                                                                                                       | 0        |
|                  | 0x12             | 5    | Auxiliary DAC2 power-down        |                                                                                                                                                                                                                                                                                                                       | 0        |
|                  | 0x13 to 0x18     |      | Reserved                         |                                                                                                                                                                                                                                                                                                                       |          |
| Interrupt        | 0x19             | 7    | Data timing error IRQ            | Read only. Active high indicates a timing violation occurred on the input data port. The IRQ is latched. This bit is cleared when the Interrupt register is read.                                                                                                                                                     | 0        |
|                  | 0x19             | 6    | Sync timing error IRQ            | Read only. Active high indicates a timing violation occurred on the SYNC_I input. The IRQ is latched. This bit is cleared when the Interrupt register is read.                                                                                                                                                        | 0        |
|                  | 0x19             | 4    | Data timing error type           | Read only. Indicates the timing error type.<br>0: hold time violation.<br>1: setup time violation.<br>Meaningful when data timing error IRQ is active.                                                                                                                                                                | 0        |
|                  | 0x19             | 3    | Data timing error IRQ enable     | 0: data timing error IRQ is masked.<br>1: data timing error IRQ is enabled.                                                                                                                                                                                                                                           | 0        |
|                  | 0x19             | 2    | Sync timing error IRQ enable     | 0: sync timing error IRQ is masked.<br>1: sync timing error IRQ is enabled.                                                                                                                                                                                                                                           | 0        |
|                  | 0x19             | 0    | Internal sync loopback           | The received SYNC_O signal is looped back to the SYNC_I signal.                                                                                                                                                                                                                                                       | 0        |
| Version          | 0x1F             | 7:0  | Version[7:0]                     | Indicates device hardware revision number.                                                                                                                                                                                                                                                                            | 00000111 |



## INTERPOLATION FILTER ARCHITECTURE

The AD9776A/AD9778A/AD9779A can provide up to 8× interpolation, or the interpolation filters can be entirely disabled. It is important to note that the input signal should be backed off by approximately 0.01 dB from full scale to avoid overflowing the interpolation filters. The coefficients of the low-pass filters and the inverse sinc filter are given in Table 15, Table 16, Table 17, and Table 18. Spectral plots for the filter responses are shown in Figure 57, Figure 58, and Figure 59.

**Table 15. Low-Pass Filter 1**

| Lower Coefficient | Upper Coefficient | Integer Value |
|-------------------|-------------------|---------------|
| H(1)              | H(55)             | −4            |
| H(2)              | H(54)             | 0             |
| H(3)              | H(53)             | +13           |
| H(4)              | H(52)             | 0             |
| H(5)              | H(51)             | −34           |
| H(6)              | H(50)             | 0             |
| H(7)              | H(49)             | +72           |
| H(8)              | H(48)             | 0             |
| H(9)              | H(47)             | −138          |
| H(10)             | H(46)             | 0             |
| H(11)             | H(45)             | +245          |
| H(12)             | H(44)             | 0             |
| H(13)             | H(43)             | −408          |
| H(14)             | H(42)             | 0             |
| H(15)             | H(41)             | +650          |
| H(16)             | H(40)             | 0             |
| H(17)             | H(39)             | −1003         |
| H(18)             | H(38)             | 0             |
| H(19)             | H(37)             | +1521         |
| H(20)             | H(36)             | 0             |
| H(21)             | H(35)             | −2315         |
| H(22)             | H(34)             | 0             |
| H(23)             | H(33)             | +3671         |
| H(24)             | H(32)             | 0             |
| H(25)             | H(31)             | −6642         |
| H(26)             | H(30)             | 0             |
| H(27)             | H(29)             | +20,755       |
| H(28)             |                   | +32,768       |

**Table 16. Low-Pass Filter 2**

| Lower Coefficient | Upper Coefficient | Integer Value |
|-------------------|-------------------|---------------|
| H(1)              | H(23)             | −2            |
| H(2)              | H(22)             | 0             |
| H(3)              | H(21)             | +17           |
| H(4)              | H(20)             | 0             |
| H(5)              | H(19)             | −75           |
| H(6)              | H(18)             | 0             |
| H(7)              | H(17)             | +238          |
| H(8)              | H(16)             | 0             |
| H(9)              | H(15)             | −660          |
| H(10)             | H(14)             | 0             |
| H(11)             | H(13)             | +2530         |
| H(12)             |                   | +4096         |

**Table 17. Low-Pass Filter 3**

| Lower Coefficient | Upper Coefficient | Integer Value |
|-------------------|-------------------|---------------|
| H(1)              | H(15)             | −39           |
| H(2)              | H(14)             | 0             |
| H(3)              | H(13)             | +273          |
| H(4)              | H(12)             | 0             |
| H(5)              | H(11)             | −1102         |
| H(6)              | H(10)             | 0             |
| H(7)              | H(9)              | +4964         |
| H(8)              |                   | +8192         |

**Table 18. Inverse Sinc Filter**

| Lower Coefficient | Upper Coefficient | Integer Value |
|-------------------|-------------------|---------------|
| H(1)              | H(9)              | +2            |
| H(2)              | H(8)              | −4            |
| H(3)              | H(7)              | +10           |
| H(4)              | H(6)              | −35           |
| H(5)              |                   | +401          |

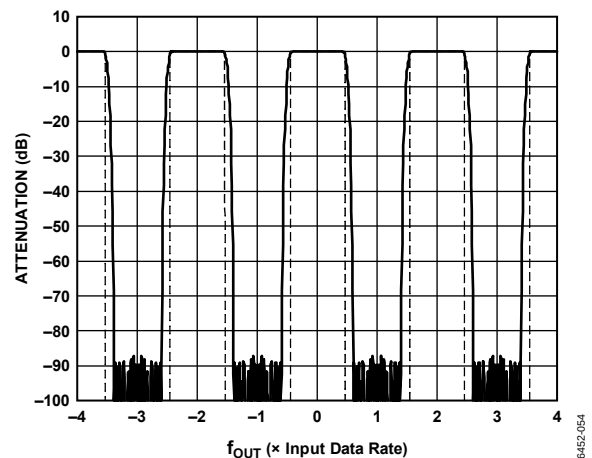


Figure 57. 2× Interpolation, Low-Pass Response to  $\pm 4\times$  Input Data Rate (Dotted Lines Indicate 1 dB Roll-Off)

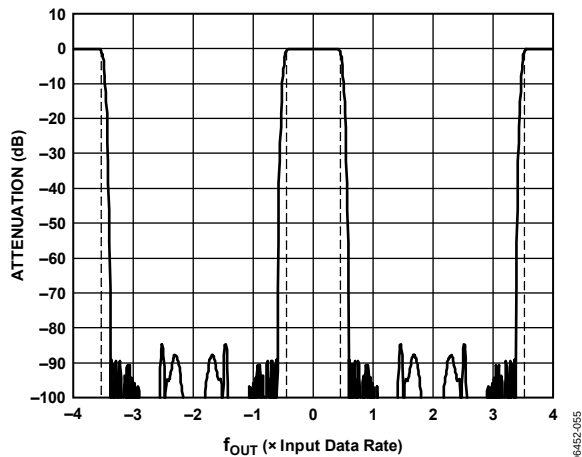


Figure 58. 4x Interpolation, Low-Pass Response to  $\pm 4\times$  Input Data Rate (Dotted Lines Indicate 1 dB Roll-Off)

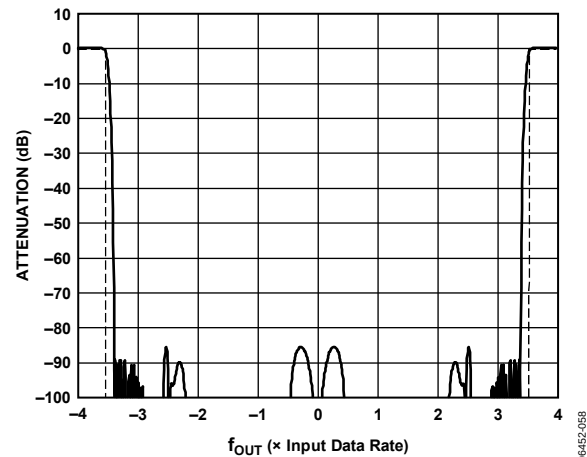


Figure 61. Interpolation/Modulation Combination of  $4f_{DAC}/8$  Filter

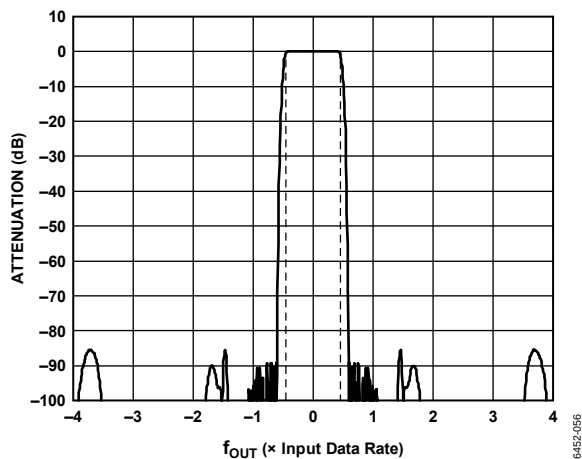


Figure 59. 8x Interpolation, Low-Pass Response to  $\pm 4\times$  Input Data Rate (Dotted Lines Indicate 1 dB Roll-Off)

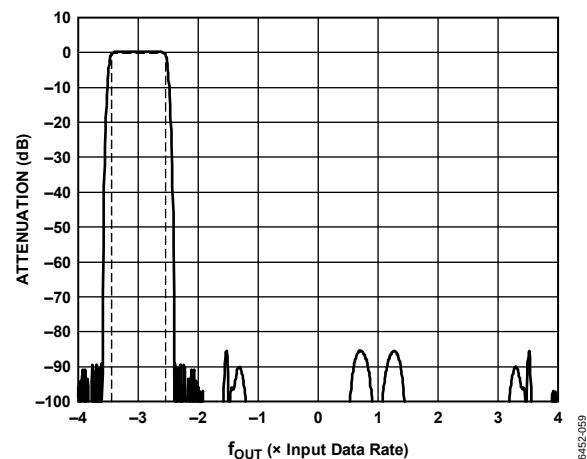


Figure 62. Interpolation/Modulation Combination of  $-3f_{DAC}/8$  Filter

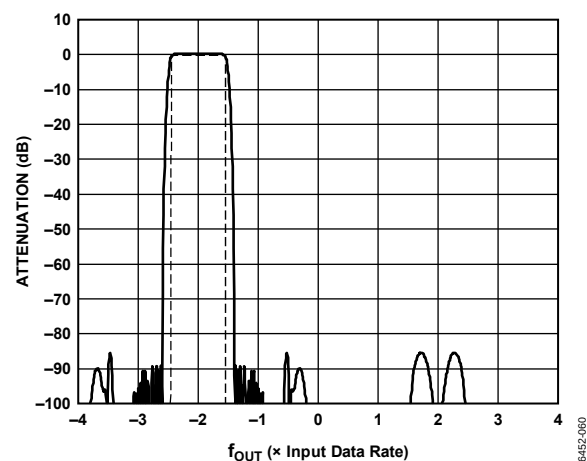


Figure 63. Interpolation/Modulation Combination of  $-2f_{DAC}/8$  Filter

With the interpolation filter and modulator combined, the incoming signal can be placed anywhere within the Nyquist region of the DAC output sample rate. When the input signal is complex, this architecture allows modulation of the input signal to positive or negative Nyquist regions (see Table 19).

The Nyquist regions of up to  $4\times$  the input data rate can be seen in Figure 60.

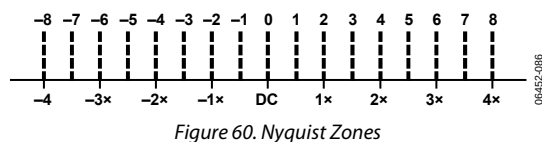
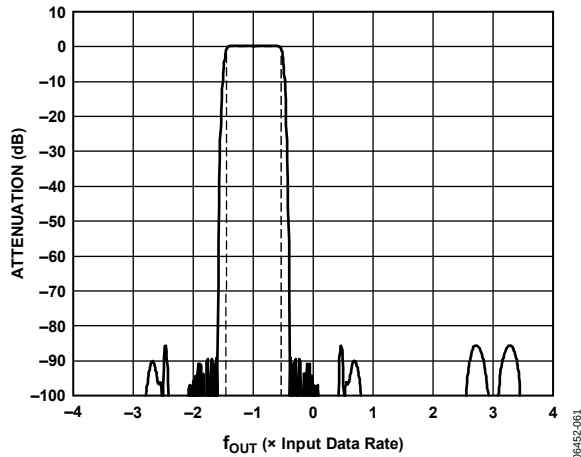
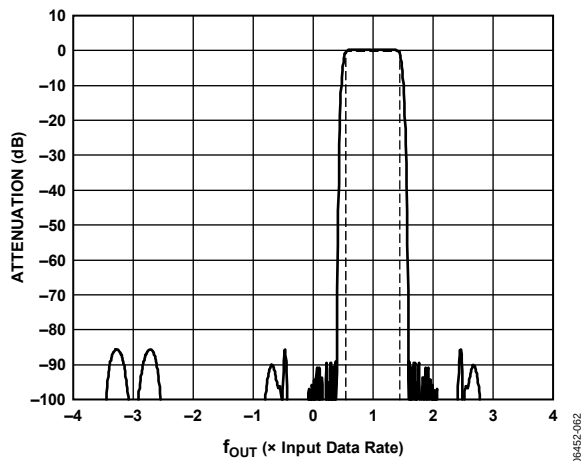
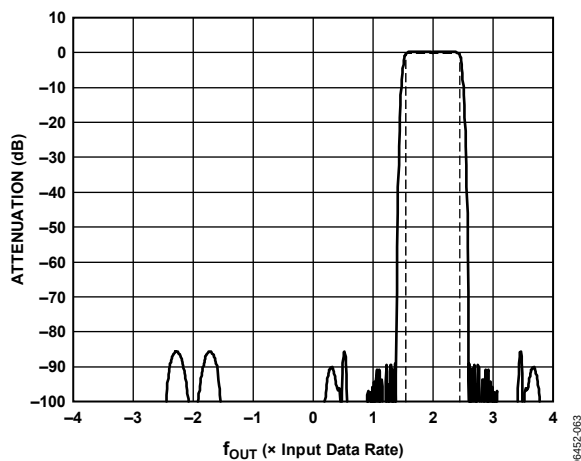
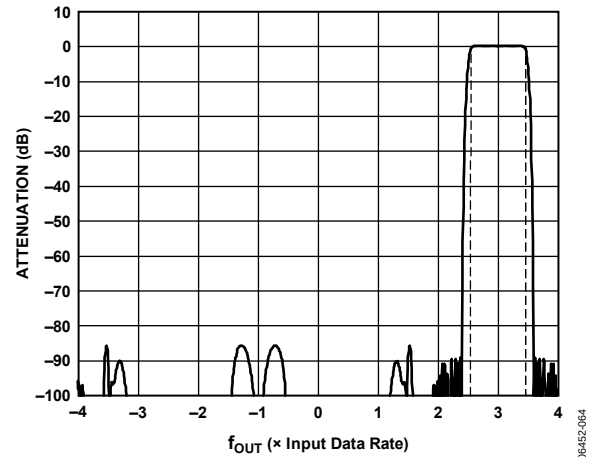


Figure 60. Nyquist Zones

Figure 57, Figure 58, and Figure 59 show the low-pass response of the digital filters with no modulation. By turning on the modulation feature, the response of the digital filters can be tuned to anywhere within the DAC bandwidth. As an example, Figure 61 to Figure 67 show the nonshifted mode filter responses for  $8\times$  interpolation (refer to Table 19 for shifted/nonshifted mode filter responses).


Figure 64. Interpolation/Modulation Combination of  $-f_{DAC}/8$  Filter

Figure 65. Interpolation/Modulation Combination of  $f_{DAC}/8$  Filter

Figure 66. Interpolation/Modulation Combination of  $2f_{DAC}/8$  Filter

Figure 67. Interpolation/Modulation Combination of  $3f_{DAC}/8$  Filter

Shifted mode filter responses allow the pass band to be centered around  $\pm 0.5 f_{DATA}$ ,  $\pm 1.5 f_{DATA}$ ,  $\pm 2.5 f_{DATA}$ , and  $\pm 3.5 f_{DATA}$ . Switching to the shifted mode response does not affect the center frequency of the signal. Instead, the pass band of the filter is simply shifted. For example, use the response shown in Figure 67 and assume the signal in-band is a complex signal over the bandwidth  $3.2 f_{DATA}$  to  $3.3 f_{DATA}$ . If the shifted mode filter response is then selected, the pass band becomes centered at  $3.5 f_{DATA}$ . However, the signal remains at the same place in the spectrum. The shifted mode capability allows the filter pass band to be placed anywhere in the DAC Nyquist bandwidth.

The AD9776A/AD9778A/AD9779A are dual DACs with internal complex modulators built into the interpolating filter response. In dual channel mode, the devices expect the real and imaginary components of a complex signal at Digital Input Port 1 and Digital Input Port 2 (I and Q, respectively). The DAC outputs then represent the real and imaginary components of the input signal, modulated by the complex carrier ( $f_{DAC}/2$ ,  $f_{DAC}/4$ , or  $f_{DAC}/8$ ).

With Register 0x02, Bit 6, set, the device accepts interleaved data on Port 1 in the I, Q, I, Q ... sequence. Note that in interleaved mode, the channel data rate at the beginning of the I and Q data paths is now half the input data rate because of the interleaving. The maximum input data rate is still subject to the maximum specification of the device. This limits the synthesis bandwidth available at the input in interleaved mode.

With Register 0x02, Bit 5 (the real mode bit), set, the Q channel and the internal I and Q digital modulation are turned off. The output spectrum at the I DAC then represents the signal at Digital Input Port 1, interpolated by  $1\times$ ,  $2\times$ ,  $4\times$ , or  $8\times$ .

The general recommendation is that if the desired signal is within  $\pm 0.4 \times f_{DATA}$ , use the nonshifted filter mode. Outside of this, the shifted filter mode should be used. In any situation, the total bandwidth of the signal is less than  $0.8 \times f_{DATA}$ .

# AD9776A/AD9778A/AD9779A

Table 19. Interpolation Filter Modes, (Register 0x01, Bits[5:2])

| Interpolation Factor[7:6] | Filter Modulation Mode[5:2] | Modulation             | Nyquist Zone Pass Band | Frequency Normalized to $f_{DAC}$ |         |         | Comments                                                                                      |
|---------------------------|-----------------------------|------------------------|------------------------|-----------------------------------|---------|---------|-----------------------------------------------------------------------------------------------|
|                           |                             |                        |                        | Low                               | Center  | High    |                                                                                               |
| 8                         | 0x00                        | DC                     | 0                      | −0.05                             | 0       | +0.05   | In 8× interpolation;<br>BW (min) = $0.0375 \times f_{DAC}$<br>BW (max) = $0.1 \times f_{DAC}$ |
| 8                         | 0x01                        | DC shifted             | +1                     | +0.0125                           | +0.0625 | +0.1125 |                                                                                               |
| 8                         | 0x02                        | $f_{DAC}/8$            | +2                     | +0.075                            | +0.125  | +0.175  |                                                                                               |
| 8                         | 0x03                        | $f_{DAC}/8$ shifted    | +3                     | +0.1375                           | +0.1875 | +0.2375 |                                                                                               |
| 8                         | 0x04                        | $f_{DAC}/4$            | +4                     | +0.2                              | +0.25   | +0.3    |                                                                                               |
| 8                         | 0x05                        | $f_{DAC}/4$ shifted    | +5                     | +0.2625                           | +0.3125 | +0.3625 |                                                                                               |
| 8                         | 0x06                        | $3f_{DAC}/8$           | +6                     | +0.325                            | +0.375  | +0.425  |                                                                                               |
| 8                         | 0x07                        | $3f_{DAC}/8$ shifted   | +7                     | +0.3875                           | +0.4375 | +0.4875 |                                                                                               |
| 8                         | 0x08                        | $f_{DAC}/2$            | ±8                     | −0.55                             | −0.5    | −0.45   |                                                                                               |
| 8                         | 0x09                        | $f_{DAC}/2$ shifted    | −7                     | −0.4875                           | −0.4375 | −0.3875 |                                                                                               |
| 8                         | 0x0A                        | − $3f_{DAC}/8$         | −6                     | −0.425                            | −0.375  | −0.343  |                                                                                               |
| 8                         | 0x0B                        | − $3f_{DAC}/8$ shifted | −5                     | −0.3625                           | −0.3125 | −0.2625 |                                                                                               |
| 8                         | 0x0C                        | − $f_{DAC}/4$          | −4                     | −0.3                              | −0.25   | −0.2    |                                                                                               |
| 8                         | 0x0D                        | − $f_{DAC}/4$ shifted  | −3                     | −0.2375                           | −0.1875 | −0.1375 |                                                                                               |
| 8                         | 0x0E                        | − $f_{DAC}/8$          | −2                     | −0.175                            | −0.125  | −0.075  |                                                                                               |
| 8                         | 0x0F                        | − $f_{DAC}/8$ shifted  | −1                     | −0.1125                           | −0.0625 | −0.0125 |                                                                                               |
| 4                         | 0x00                        | DC                     | 0                      | −0.1                              | 0       | +0.1    | In 4× interpolation;<br>BW (min) = $0.075 \times f_{DAC}$<br>BW (max) = $0.2 \times f_{DAC}$  |
| 4                         | 0x01                        | DC shifted             | +1                     | +0.025                            | +0.125  | +0.225  |                                                                                               |
| 4                         | 0x02                        | $f_{DAC}/4$            | +2                     | +0.15                             | +0.25   | +0.35   |                                                                                               |
| 4                         | 0x03                        | $f_{DAC}/4$ shifted    | +3                     | +0.275                            | +0.375  | +0.475  |                                                                                               |
| 4                         | 0x04                        | $f_{DAC}/2$            | ±4                     | −0.6                              | −0.5    | −0.4    |                                                                                               |
| 4                         | 0x05                        | $f_{DAC}/2$ shifted    | −3                     | −0.475                            | −0.375  | −0.275  |                                                                                               |
| 4                         | 0x06                        | − $f_{DAC}/4$          | −2                     | −0.35                             | −0.25   | −0.15   |                                                                                               |
| 4                         | 0x07                        | − $f_{DAC}/4$ shifted  | −1                     | −0.225                            | −0.125  | −0.025  |                                                                                               |
| 2                         | 0x00                        | DC                     | 0                      | −0.2                              | 0       | +0.2    | In 2× interpolation;<br>BW (min) = $0.15 \times f_{DAC}$<br>BW (max) = $0.4 \times f_{DAC}$   |
| 2                         | 0x01                        | DC shifted             | +1                     | +0.05                             | +0.25   | +0.45   |                                                                                               |
| 2                         | 0x02                        | $f_{DAC}/2$            | ±2                     | −0.7                              | −0.5    | −0.3    |                                                                                               |
| 2                         | 0x03                        | $f_{DAC}/2$ shifted    | −1                     | −0.45                             | −0.25   | −0.05   |                                                                                               |

## INTERPOLATION FILTER BANDWIDTH LIMITS

The AD9776A/AD9778A/AD9779A use a novel interpolation filter architecture that allows DAC IF frequencies to be generated anywhere in the spectrum. Figure 68 shows the traditional choice of DAC IF output bandwidth placement. Note that there are no possible filter modes in which the carrier can be placed near  $0.5 \times f_{\text{DATA}}$ ,  $1.5 \times f_{\text{DATA}}$ ,  $2.5 \times f_{\text{DATA}}$ , and so on.

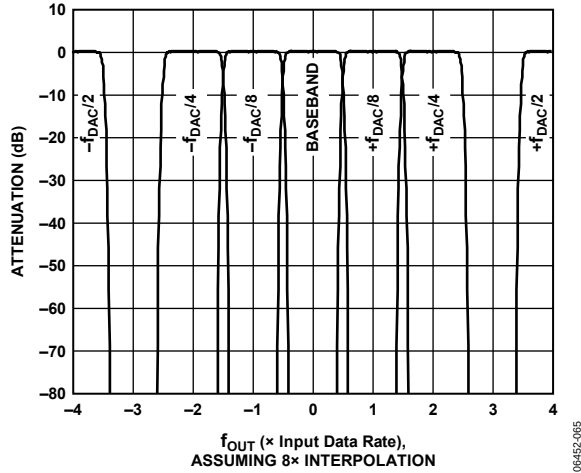


Figure 68. Traditional Bandwidth Options for TxDAC Output IF

The filter architecture not only allows the interpolation filter pass bands to be centered in the middle of the input Nyquist zones (as explained in this section), but also allows the possibility of a  $3 \times f_{\text{DAC}}/8$  modulation mode when interpolating by 8. With all of these filter combinations, a carrier of given bandwidth can be placed anywhere in the spectrum and fall into a possible pass band of the interpolation filters. The possible bandwidths accessible with the filter architecture are shown in Figure 69 and Figure 70. Note that the shifted and nonshifted filter modes are all accessible by programming the filter mode for a particular interpolation rate.

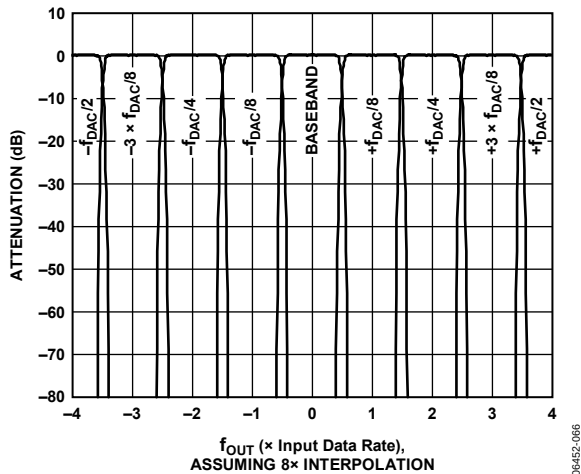


Figure 69. Nonshifted Bandwidths Accessible with the Filter Architecture

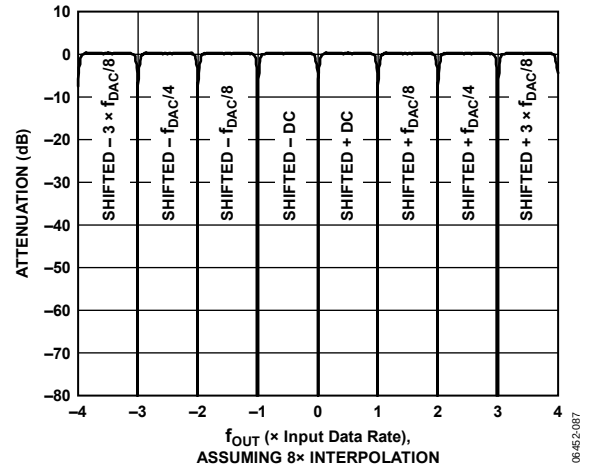


Figure 70. Shifted Bandwidths Accessible with the Filter Architecture

With this filter architecture, a signal placed anywhere in the spectrum is possible. However, the signal bandwidth is limited by the input sample rate of the DAC and the specific placement of the carrier in the spectrum. The bandwidth restriction resulting from the combination of filter response and input sample rate is often referred to as the synthesis bandwidth, because this is the largest bandwidth that the DAC can synthesize.

The maximum bandwidth condition exists if the carrier is placed directly in the center of one of the filter pass bands. In this case, the total 0.1 dB bandwidth of the interpolation filters is equal to  $0.8 \times f_{\text{DATA}}$ . As Table 19 shows, the synthesis bandwidth as a fraction of the DAC output sample rate drops by a factor of 2 for every doubling of interpolation rate. The minimum bandwidth condition exists, for example, if a carrier is placed at  $0.25 \times f_{\text{DATA}}$ . In this situation, if the nonshifted filter response is enabled, the high end of the filter response cuts off at  $0.4 \times f_{\text{DATA}}$ , thus limiting the high end of the signal bandwidth. If the shifted filter response is instead enabled, then the low end of the filter response cuts off at  $0.1 \times f_{\text{DATA}}$ , thus limiting the low end of the signal bandwidth. The minimum bandwidth specification that applies for a carrier at  $0.25 \times f_{\text{DATA}}$  is therefore  $0.3 \times f_{\text{DATA}}$ . The minimum bandwidth behavior is repeated over the spectrum for carriers placed at  $(\pm n \pm 0.25) \times f_{\text{DATA}}$ , where  $n$  is any integer.

## Digital Modulation

The digital quadrature modulation occurs within the interpolation filter. The modulation shifts the frequency spectrum of the incoming data by the frequency offset selected. The frequency offsets available are multiples of the input data rate. The modulation is equivalent to multiplying the quadrature input signal by a complex carrier signal,  $C(t)$ , of the following form:

$$C(t) = \cos(\omega_c t) + j \sin(\omega_c t)$$

# AD9776A/AD9778A/AD9779A

As shown in Table 20, the mixing functions of most of the modes result in cross-coupling of samples between the I and Q channels. The I and Q channels only operate independently with the  $f_s/2$  mode. This means that real modulation using both the I and Q DAC outputs can only be done in the  $f_s/2$  mode. All other modulation modes require complex input data and produce complex output signals.

**Table 20. Modulation Mixing Sequences**

| Modulation   | Mixing Sequence                                                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $f_{DAC}/2$  | $I = I, -I, I, -I, \dots$<br>$Q = Q, -Q, Q, -Q, \dots$                                                                                                               |
| $f_{DAC}/4$  | $I = I, Q, -I, -Q, \dots$<br>$Q = Q, -I, -Q, I, \dots$                                                                                                               |
| $-f_{DAC}/4$ | $I = I, -Q, -I, Q, \dots$<br>$Q = Q, I, -Q, -I, \dots$                                                                                                               |
| $f_{DAC}/8$  | $I = I, r(I + Q), Q, r(-I + Q), -I, -r(I + Q), -Q, r(I - Q), \dots$<br>$Q = Q, r(Q - I), -I, -r(Q + I), -Q, r(-Q + I), I, r(Q + I), \dots$<br>where $r = \sqrt{2}/2$ |

## INVERSE SINC FILTER

The inverse sinc filter is implemented as a nine-tap FIR filter. It is designed to provide less than  $\pm 0.05$  dB pass-band ripple up to a frequency of  $0.4 \times f_{DATA}$ . To provide the necessary gain at the upper end of the pass band, the inverse sinc filter has an intrinsic insertion loss of 3.4 dB. The transfer function is shown in Figure 71 and the tap coefficients are given in Table 21.

**Table 21. Inverse Sinc Filter**

| Lower Coefficient | Upper Coefficient | Integer Value |
|-------------------|-------------------|---------------|
| H(1)              | H(9)              | +2            |
| H(2)              | H(8)              | -4            |
| H(3)              | H(7)              | +10           |
| H(4)              | H(6)              | -35           |
| H(5)              | N/A               | +401          |

The inverse sinc filter is disabled by default. It can be enabled by setting the inverse sinc enable bit (Bit 3) in Register 0x02.

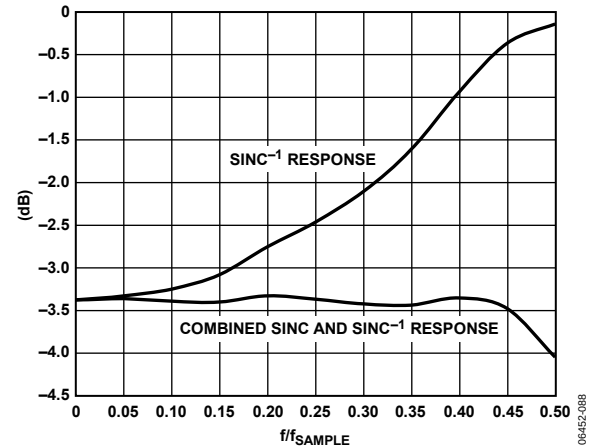


Figure 71. Transfer Function of Inverse Sinc Filter with the DAC  $\sin(x)/x$  Output

## SOURCING THE DAC SAMPLE CLOCK

The AD9776A/AD9778A/AD9779A offer two modes of sourcing the DAC sample clock (DACCLK). The first mode employs an on-chip clock multiplier that accepts a reference clock operating at the lower input frequency, most commonly the data input frequency. The on-chip PLL then multiplies the reference clock up to a higher frequency, which can then be used to generate all of the internal clocks required by the DAC. The clock multiplier provides a high quality clock that meets the performance requirements of most applications. Using the on-chip clock multiplier removes the burden of generating and distributing the high speed DACCLK at the board level. The second mode bypasses the clock multiplier circuitry and allows DACCLK to be directly sourced through the REFCLK pins. This mode enables the user to source a very high quality input clock directly to the DAC core. Sourcing the DACCLK directly through the REFCLK pins may be necessary in demanding applications that require the lowest possible DAC output noise at higher output frequencies.

In either case (that is, using the on-chip clock multiplier or sourcing the DACCLK directly through the REFCLK pins), it is necessary that the REFCLK signal have low jitter to maximize the DAC noise performance.

### DIRECT CLOCKING

When the PLL is disabled (Register 0x09, Bit 7 = 0), the REFCLK input is used directly as the DAC sample clock (DACCLK). The frequency of REFCLK needs to be the input data rate multiplied by the interpolation factor (and by an additional factor of 2 if zero stuffing is enabled).

### CLOCK MULTIPLICATION

When the PLL is enabled (Register 0x09, Bit 7 = 1), the clock multiplication circuit generates the DAC sample clock from the lower rate REFCLK input. The functional diagram of the clock multiplier is shown in Figure 72.

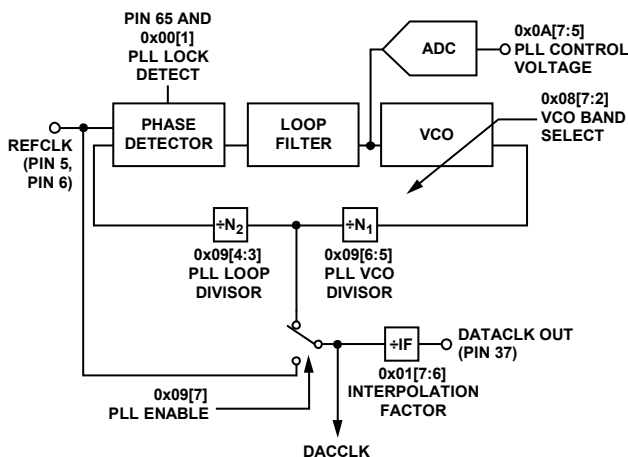


Figure 72. Clock Multiplier Circuit

The clock multiplier circuit operates such that the VCO outputs a frequency,  $f_{VCO}$ , equal to the REFCLK input signal frequency multiplied by  $N1 \times N2$ .

$$f_{VCO} = f_{REFCLK} \times (N1 \times N2)$$

The DAC sample clock frequency,  $f_{DACCLK}$ , is equal to

$$f_{DACCLK} = f_{REFCLK} \times N2$$

When the PLL is enabled, the maximum input clock frequency  $f_{REFCLK}$  is 250 MHz. The values of  $N1$  and  $N2$  must be chosen to keep  $f_{VCO}$  in the optimal operating range of 1.0 GHz to 2.0 GHz. Once the VCO output frequency is known, the correct PLL band select (Register 0x08, Bits[7:2]) value can be chosen.

### PLL Bias Settings

There are three bias settings for the PLL circuitry that should be programmed to their nominal values. The PLL values shown in Table 22 are the recommended settings for these parameters.

Table 22. PLL Settings

| PLL 3-Wire Interface Control | Address  |       | Optimal Setting |
|------------------------------|----------|-------|-----------------|
|                              | Register | Bits  |                 |
| PLL Loop Bandwidth           | 0x0A     | [4:0] | 01111           |
| PLL VCO Drive                | 0x08     | [1:0] | 11              |
| PLL Bias                     | 0x09     | [2:0] | 011             |

The PLL loop bandwidth variable configures the bandwidth of the PLL loop filter. A setting of 00000 configures the bandwidth to be approximately 1 MHz. A setting of 11111 configures the bandwidth to be approximately 10 MHz. The optimal value of 01111 sets the loop bandwidth to be approximately 3 MHz.

### Configuring the PLL Band Select Value

The PLL VCO has a valid operating range from approximately 1.0 GHz to 2.0 GHz. This range is covered in 63 overlapping frequency bands, as shown in Table 23. For any desired VCO output frequency, there are multiple valid PLL band select values. It is important to note that the data shown in Table 23 is for a typical device. Device-to-device variations can shift the actual VCO output frequency range by 30 MHz to 40 MHz. In addition, the VCO output frequency varies as a function of temperature. Therefore, it is required that the optimal PLL band select value be determined for each individual device at a particular operating temperature.

The device has an automatic PLL band select feature on chip. When this feature is enabled, the device determines the optimal PLL band setting for the device at the given temperature. This setting holds for a  $\pm 60^\circ\text{C}$  temperature swing in ambient temperature. If the device is operated in an environment that experiences a larger temperature swing, an offset should be applied to the automatically selected PLL band.

# AD9776A/AD9778A/AD9779A

Table 23. Typical VCO Frequency Range vs. PLL Band Select Value

| PLL Lock Ranges Over Temperature, –40°C to +85°C |                           |                   | PLL Lock Ranges Over Temperature, –40°C to +85°C |                           |                   |
|--------------------------------------------------|---------------------------|-------------------|--------------------------------------------------|---------------------------|-------------------|
| PLL Band Select                                  | VCO Frequency Range (MHz) |                   | PLL Band Select                                  | VCO Frequency Range (MHz) |                   |
|                                                  | f <sub>LOW</sub>          | f <sub>HIGH</sub> |                                                  | f <sub>LOW</sub>          | f <sub>HIGH</sub> |
| 111111 (63)                                      | Auto mode                 |                   | 011111 (31)                                      | 1402                      | 1468              |
| 111110 (62)                                      | 1975                      | 2026              | 011110 (30)                                      | 1397                      | 1451              |
| 111101 (61)                                      | 1956                      | 2008              | 011101 (29)                                      | 1361                      | 1427              |
| 111100 (60)                                      | 1938                      | 1992              | 011100 (28)                                      | 1356                      | 1412              |
| 111011 (59)                                      | 1923                      | 1977              | 011011 (27)                                      | 1324                      | 1389              |
| 111010 (58)                                      | 1902                      | 1961              | 011010 (26)                                      | 1317                      | 1375              |
| 111001 (57)                                      | 1883                      | 1942              | 011001 (25)                                      | 1287                      | 1352              |
| 111000 (56)                                      | 1870                      | 1931              | 011000 (24)                                      | 1282                      | 1336              |
| 110111 (55)                                      | 1848                      | 1915              | 010111 (23)                                      | 1250                      | 1313              |
| 110110 (54)                                      | 1830                      | 1897              | 010110 (22)                                      | 1245                      | 1299              |
| 110101 (53)                                      | 1822                      | 1885              | 010101 (21)                                      | 1215                      | 1277              |
| 110100 (52)                                      | 1794                      | 1869              | 010100 (20)                                      | 1210                      | 1264              |
| 110011 (51)                                      | 1779                      | 1853              | 010011 (19)                                      | 1182                      | 1242              |
| 110010 (50)                                      | 1774                      | 1840              | 010010 (18)                                      | 1174                      | 1231              |
| 110001 (49)                                      | 1748                      | 1825              | 010001 (17)                                      | 1149                      | 1210              |
| 110000 (48)                                      | 1729                      | 1810              | 010000 (16)                                      | 1141                      | 1198              |
| 101111 (47)                                      | 1730                      | 1794              | 001111 (15)                                      | 1115                      | 1178              |
| 101110 (46)                                      | 1699                      | 1780              | 001110 (14)                                      | 1109                      | 1166              |
| 101101 (45)                                      | 1685                      | 1766              | 001101 (13)                                      | 1086                      | 1145              |
| 101100 (44)                                      | 1684                      | 1748              | 001100 (12)                                      | 1078                      | 1135              |
| 101011 (43)                                      | 1651                      | 1729              | 001011 (11)                                      | 1055                      | 1106              |
| 101010 (42)                                      | 1640                      | 1702              | 001010 (10)                                      | 1047                      | 1103              |
| 101001 (41)                                      | 1604                      | 1681              | 001001 (9)                                       | 1026                      | 1067              |
| 101000 (40)                                      | 1596                      | 1658              | 001000 (8)                                       | 1019                      | 1072              |
| 100111 (39)                                      | 1564                      | 1639              | 000111 (7)                                       | 998                       | 1049              |
| 100110 (38)                                      | 1555                      | 1606              | 000110 (6)                                       | 991                       | 1041              |
| 100101 (37)                                      | 1521                      | 1600              | 000101 (5)                                       | 976                       | 1026              |
| 100100 (36)                                      | 1514                      | 1575              | 000100 (4)                                       | 963                       | 1011              |
| 100011 (35)                                      | 1480                      | 1553              | 000011 (3)                                       | 950                       | 996               |
| 100010 (34)                                      | 1475                      | 1529              | 000010 (2)                                       | 935                       | 981               |
| 100001 (33)                                      | 1439                      | 1505              | 000001 (1)                                       | 922                       | 966               |
| 100000 (32)                                      | 1435                      | 1489              | 000000 (0)                                       | 911                       | 951               |



### Configuring PLL Band Select with Temperature Sensing

The following procedure outlines a method for setting the PLL band select value for a device operating at a particular temperature that holds for a change in ambient temperature over the total  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  operating range of the device without further user intervention. Note that REFCLK must be applied to the device during this procedure.

1. Program the values of N1 (Register 0x09, Bits[6:5]) and N2 (Register 0x09, Bits[4:3]), along with the PLL settings shown in Table 22.
2. Set the PLL band (Register 0x08, Bits[7:2]) to 63 to enable PLL auto mode.
3. Wait for the PLL\_LOCK pin or the PLL lock indicator (Register 0x00, Bit 1) to go high. This should occur within 5 ms.
4. Read back the 6-bit PLL band (Register 0x08, Bits[7:2]).
5. Based on the temperature when the PLL auto band select is performed, set the PLL band indicated in either Table 24 or Table 25 by rewriting the readback values into the PLL Band Select parameter (Register 0x08, Bits[7:2]).

This procedure requires temperature sensing upon start-up or reset of the device to optimally choose the PLL band select value that holds over the entire operating temperature range. If the optimal band is in the range of 0 to 31 (lower VCO frequency), refer to Table 24.

**Table 24. Setting Optimal PLL Band, When Band Is in the Lower Range (0 to 31)**

| If System Startup Temperature Is               | Set PLL Band as Follows          |
|------------------------------------------------|----------------------------------|
| $-40^{\circ}\text{C}$ to $-10^{\circ}\text{C}$ | Set PLL band = readback band + 2 |
| $-10^{\circ}\text{C}$ to $+15^{\circ}\text{C}$ | Set PLL band = readback band + 1 |
| $15^{\circ}\text{C}$ to $55^{\circ}\text{C}$   | Set PLL band = readback band     |
| $55^{\circ}\text{C}$ to $85^{\circ}\text{C}$   | Set PLL band = readback band – 1 |

If the optimal band is in the range of 32 to 62 (higher VCO frequency), refer to Table 25.

**Table 25. Setting Optimal PLL Band, When Band Is in the Higher Range (32 to 62)**

| If System Startup Temperature Is               | Set PLL Band as Follows          |
|------------------------------------------------|----------------------------------|
| $-40^{\circ}\text{C}$ to $-30^{\circ}\text{C}$ | Set PLL band = readback band + 3 |
| $-30^{\circ}\text{C}$ to $-10^{\circ}\text{C}$ | Set PLL band = readback band + 2 |
| $-10^{\circ}\text{C}$ to $+15^{\circ}\text{C}$ | Set PLL band = readback band + 1 |
| $15^{\circ}\text{C}$ to $55^{\circ}\text{C}$   | Set PLL band = readback band     |
| $55^{\circ}\text{C}$ to $85^{\circ}\text{C}$   | Set PLL band = readback band – 1 |

### Known Temperature Calibration with Memory

If temperature sensing is not available in the system, a factory calibration at a known temperature is another method for guaranteeing lock over temperature. Factory calibration can be performed as follows:

1. Program the values of N1 (Register 0x09, Bits[6:5]) and N2 (Register 0x09, Bits[4:3]), along with the PLL settings shown in Table 22.
2. Set the PLL band (Register 0x08, Bits[7:2]) to 63 to enable PLL auto mode.
3. Wait for the PLL\_LOCK pin or the PLL lock indicator (Register 0x00, Bit 1) to go high. This should occur within 5 ms.
4. Read back the 6-bit PLL band (Register 0x08, Bits[7:2]).
5. Based on the temperature when the PLL auto band select is performed, store into nonvolatile memory the PLL band indicated in either Table 24 or Table 25. On system power-up or restart, load the stored PLL band value into the PLL band select parameter (Register 0x08, Bits[7:2]).

### Set-and-Forget Device Option

If the PLL band select configuration methods described in the previous sections cannot be implemented in a particular system, there may be a screened device option that can satisfy the system requirements. This allows the user to preload a specific PLL band select value for all devices that holds over temperature. Example REFCLK and VCO frequencies are shown in Table 26.

**Table 26. Typical VCO Frequency Range vs. PLL Band Select Value**

| $f_{\text{REFCLK}}$ (MHz) | $f_{\text{VCO}}$ (MHz) | Guaranteed PLL Band | Total PLL Divide Ratio |
|---------------------------|------------------------|---------------------|------------------------|
| 59.73335                  | 955.7336               | 2                   | 16                     |
| 61.44                     | 1966.08                | 61                  | 32                     |
| 67.2                      | 1075.2                 | 11                  | 16                     |
| 76.8                      | 1228.8                 | 20                  | 16                     |
| 80.01                     | 1280                   | 23                  | 16                     |
| 81.92                     | 1310.72                | 25                  | 16                     |
| 92.16                     | 1474.56                | 34                  | 16                     |
| 112.0                     | 1792.0                 | 50                  | 16                     |
| 119.4667                  | 955.7336               | 2                   | 8                      |
| 122.88                    | 1966.08                | 61                  | 16                     |

## DRIVING THE REFCLK INPUT

The REFCLK input requires a low jitter differential drive signal. The signal level can range from 400 mV p-p differential to 1.6 V p-p differential centered about a 400 mV input common-mode voltage. Looking at the single-ended inputs, REFCLK+ or REFCLK-, each input pin can safely swing from 200 mV p-p to 800 mV p-p about the 400 mV common-mode voltage. Although these input levels are not directly LVDS compatible, REFCLK can be driven by an offset ac-coupled LVDS signal, as shown in Figure 73.

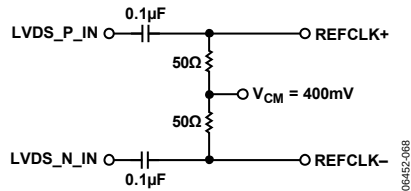


Figure 73. LVDS REFCLK Drive Circuit

If a clean sine clock is available, it can be transformer-coupled to REFCLK, as shown in Figure 74. Use of a CMOS or TTL clock is also acceptable for lower sample rates. It can be routed through a CMOS to LVDS translator, and then ac-coupled as described in this section. Alternatively, it can be transformer-coupled and clamped, as shown in Figure 74.

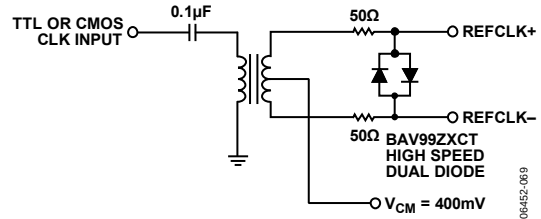


Figure 74. TTL or CMOS REFCLK Drive Circuit

A simple bias network for generating  $V_{CM}$  is shown in Figure 75. It is important to use CVDD18 and CGND for the clock bias circuit. Any noise or other signal that is coupled onto the clock is multiplied by the DAC digital input signal and can degrade DAC performance.

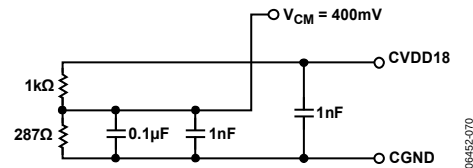


Figure 75. REFCLK  $V_{CM}$  Generator Circuit

## FULL-SCALE CURRENT GENERATION

### INTERNAL REFERENCE

Full-scale current on the I DAC and Q DAC can be set from 8.66 mA to 31.66 mA. Initially, the 1.2 V band gap reference is used to set up a current in an external resistor connected to I120 (Pin 75). A simplified block diagram of the reference circuitry is shown in Figure 76. The recommended value for the external resistor is 10 kΩ, which sets up an  $I_{\text{REFERENCE}}$  in the resistor of 120 μA, which in turn provides a DAC output full-scale current of 20 mA. Because the gain error is a linear function of this resistor, a high precision resistor improves gain matching to the internal matching specification of the devices. Gain drift over temperature is also affected by this resistor. A resistor with a low temperature coefficient is recommended in applications requiring good gain stability.

Internal current mirrors provide a current-gain scaling, where the I DAC or Q DAC gain is a 10-bit word in the 3-wire interface port register (Register 0x0B, Register 0x0C, Register 0x0F, and Register 0x10). The default value for the DAC gain registers gives an  $I_{\text{FS}}$  of approximately 20 mA.  $I_{\text{FS}}$  is equal to

$$I_{\text{FS}} = \frac{1.2 \text{ V}}{R} \times \left( \frac{27}{12} + \left( \frac{6}{1024} \times \text{DAC Gain} \right) \right) \times 32$$

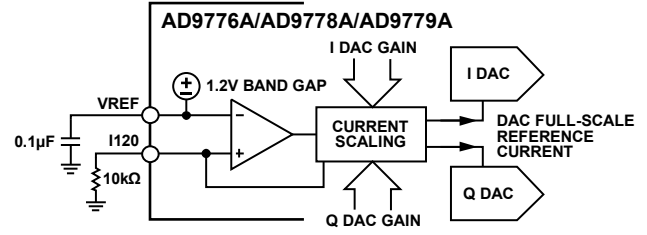


Figure 76. Reference Circuitry

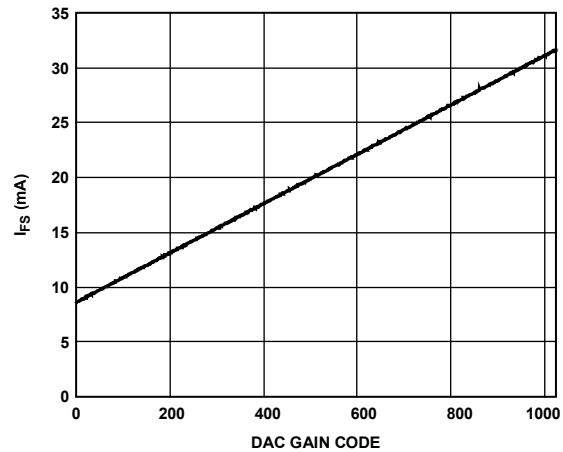


Figure 77.  $I_{\text{FS}}$  vs. DAC Gain Code

## GAIN AND OFFSET CORRECTION

Analog quadrature modulators make it very easy to realize single sideband radios. However, there are several nonideal aspects of quadrature modulator performance. Among these analog degradations are

- **Gain mismatch:** The gain in the real and imaginary signal paths of the quadrature modulator may not be matched perfectly. This leads to less than optimal image rejection because the cancellation of the negative frequency image is less than perfect.
- **Local oscillator (LO) feedthrough:** The quadrature modulator has a finite dc-referred offset, as well as coupling from its LO port to the signal inputs. These can lead to significant spectral spurs at the frequency of the quadrature modulator LO.

The AD9776A/AD9778A/AD9779A have the capability to correct for both of these analog degradations. Note that these degradations drift over temperature; therefore, if close to optimal single sideband performance is desired, a scheme for sensing these degradations over temperature and correcting for them may be necessary.

### I/Q CHANNEL GAIN MATCHING

Gain matching is achieved by adjusting the values in the DAC gain registers. For the I DAC, these values are in the 0x0B and 0x0C I DAC control registers. For the Q DAC, these values are in the 0x0F and 0x10 Q DAC control registers. These are 10-bit values. To perform gain compensation, raise or lower the value of one of these registers by a fixed step size and measure the amplitude of the unwanted image. If the unwanted image is increasing in amplitude, stop the procedure and try the same adjustment on the other DAC control register. Do this until the image rejection cannot be improved through further adjustment of these registers.

It should be noted that LO feedthrough compensation is independent of gain. However, gain compensation can affect the LO compensation because the gain compensation may change the common-mode level of the signal. The dc offset of some modulators is common-mode level dependent. Therefore, it is recommended that the gain adjustment be performed prior to LO compensation.

### AUXILIARY DAC OPERATION

Two auxiliary DACs are provided on the AD9776A/AD9778A/AD9779A. The full-scale output current on these DACs is derived from the 1.2 V band gap reference and external resistor between the I120 pin and ground. The gain scale from the reference amplifier current ( $I_{\text{REFERENCE}}$ ) to the auxiliary DAC reference current is 16.67 mA with the auxiliary DAC gain set to full

scale (10-bit values, 3-wire interface Register 0x0D and 3-wire interface Register 0x11). This results in a full-scale current of approximately 2 mA for auxiliary DAC1 and auxiliary DAC2.

The auxiliary DAC structure is shown in Figure 78. Only one of the two output pins of the auxiliary DAC is active at a time. The inactive side goes to a high impedance state ( $>100 \text{ k}\Omega$ ). The active output pin is chosen by writing to Bit 7 of Register 0x0E and Register 0x12.

The active output can act as either a current source or a current sink. When sourcing current, the output compliance voltage is 0 V to 1.6 V. When sinking current, the output compliance voltage is 0.8 V to 1.6 V. The output pin is chosen to be a current source or current sink by writing to Bit 6 of Register 0x0E and Register 0x12.

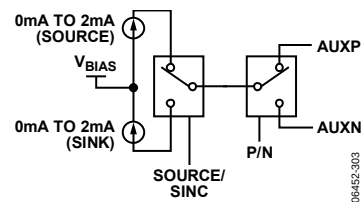


Figure 78. Auxiliary DAC Source/Sink for AD9776A/AD9778A/AD9779A

The magnitude of the auxiliary DAC1 current is controlled by the 0x0D and 0x0E auxiliary DAC1 control registers; the magnitude of the auxiliary DAC2 current is controlled by the 0x11 and 0x12 auxiliary DAC2 control registers. These auxiliary DACs have the ability to source or sink current. This is programmable via Bit 6 in either auxiliary DAC control register. The choice of sinking or sourcing should be made at circuit design time. There is no advantage to switching between current source or current sink once the circuit is in place.

The auxiliary DACs can be used for LO cancellation when the DAC output is followed by a quadrature modulator. This LO feedthrough is caused by the input-referred dc offset voltage of the quadrature modulator (and the DAC output offset voltage mismatch) and may degrade system performance.

Typical DAC-to-quadrature modulator interfaces are shown in Figure 79. Often, the input common-mode voltage for the modulator is much higher than the output compliance range of the DAC, making ac coupling or a dc level shift necessary. If the required common-mode input voltage on the quadrature modulator matches that of the DAC, then the dc shown in Figure 79 can be used. A low-pass or band-pass passive filter is recommended when spurious signals from the DAC (distortion and DAC images) at the quadrature modulator inputs may affect the system performance. Placing the filter at the location shown in Figure 79 allows easy design of the filter because the source and load impedances can easily be designed close to  $50 \Omega$ .

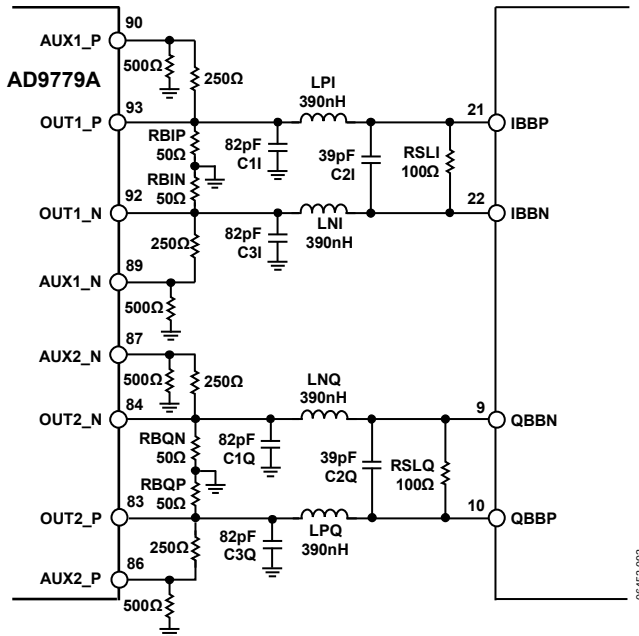


Figure 79. Typical Use of Auxiliary DACs AC Coupling to Quadrature Modulator

## LO FEEDTHROUGH COMPENSATION

The LO feedthrough compensation is the most complex of all three operations. This is due to the structure of the offset auxiliary DACs, as shown in Figure 78. To achieve LO feedthrough compensation in a circuit, each of four outputs of these auxiliary DACs can be connected through a 500  $\Omega$  resistor to ground and through a 250  $\Omega$  resistor to one of the four quadrature modulator signal inputs. The purpose of these connections is to drive a very small amount of current into the nodes at the quadrature modulator inputs, therefore adding a slight dc bias to one of the quadrature modulator signal inputs.

To achieve LO feedthrough compensation, the user should start with the default conditions of the auxiliary DAC sign registers, and then increment the magnitude of one or the other auxiliary DAC output currents. While this is being done, the amplitude of the LO feedthrough at the quadrature modulator output should be sensed. If the LO feedthrough amplitude increases, try either changing the sign of the auxiliary DAC being adjusted or adjusting the output current of the other auxiliary DAC. It may take practice before an effective algorithm is achieved.

Using the AD9776A/AD9778A/AD9779A evaluation board, the LO feedthrough can typically be adjusted down to the noise floor, although this is not stable over temperature.

## RESULTS OF GAIN AND OFFSET CORRECTION

The results of gain and offset correction can be seen in Figure 80 and Figure 81. Figure 80 shows the output spectrum of the quadrature demodulator before gain and offset correction. Figure 81 shows the output spectrum after correction. The LO feedthrough spur at 2.1 GHz has been suppressed to the noise level. This result can be achieved by applying the correction, but the correction needs to be repeated after a large change in temperature.

Note that the gain matching improved the negative frequency image rejection, but there is still a significant image present. The remaining image is now due to phase mismatch in the quadrature modulator. Phase mismatch can be distinguished from gain mismatch by the shape of the image. Note that the image in Figure 80 is relatively flat and the image in Figure 81 slopes down with frequency. Phase mismatch is frequency dependent, so an image dominated by phase mismatch has this sloping characteristic.

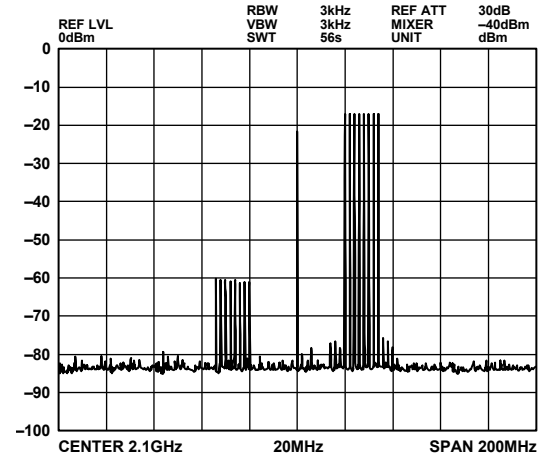


Figure 80. AD9779A and ADL5372 with a Multitone Signal at 2.1 GHz, No Gain or LO Compensation

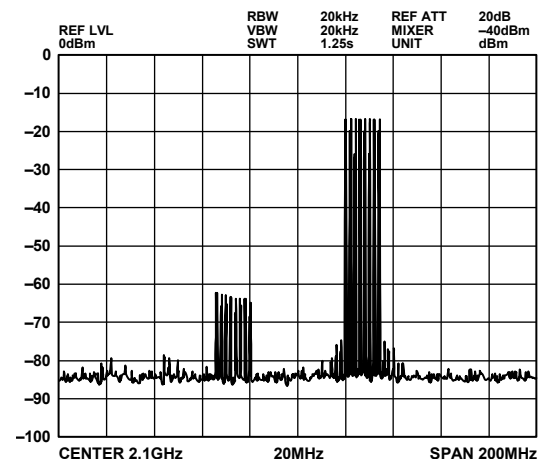


Figure 81. AD9779A and ADL5372 with a Multitone Signal at 2.1 GHz, Gain and LO Compensation Optimized

## INPUT DATA PORTS

The AD9776A/AD9778A/AD9779A can operate in two data input modes: dual port mode and single port mode. For the default dual port mode (single port bit = 0), each DAC receives data from a dedicated input port. In single port mode (single port bit = 1), both DACs receive data from Port 1. In single port mode, DAC1 and DAC2 data is interleaved, and the TXENABLE input is used to steer data to the intended DAC. In dual port mode, the TXENABLE input is used to power down the digital data path.

In dual port mode, the data must be delivered at the input data rate. In single port mode, data must be delivered at twice the input data rate of each DAC. Because the data inputs function up to a maximum of 300 MSPS, it is practical to operate with input data rates up to 150 MHz per DAC in single port mode.

In dual port and single port modes, a data clock output (DATACLK) signal is available as a fixed time base with which to drive data from an FPGA or other data source. This output signal operates at the input data rate.

### SINGLE PORT MODE

In single port mode, data for both DACs is received on the Port 1 input bus (P1D[15:0]). I and Q data samples are interleaved and are sampled on the rising edges of DATACLK. Along with the data, a framing signal must be supplied on the TXENABLE input (Pin 39), which steers incoming data to its respective DAC. When TXENABLE is high, the corresponding data-word is sent to the I DAC. When TXENABLE is low, the corresponding data is sent to the Q DAC. The timing of the digital interface in interleaved mode is shown in Figure 83.

The Q first bit (Register 0x02, Bit 0) controls the pairing order of the input data. With the Q first bit set to the default of 0, the I-Q pairing sent to the DACs is the two input data-words corresponding to TXENABLE low followed by TXENABLE high. With the Q first bit set to 1, the I-Q pairing sent to the DACs is the two input data-words corresponding to TXENABLE high, followed by TXENABLE low. Note that with either order pairing, the data sent with TXENABLE high is directed to the I DAC, and the data sent with TXENABLE low is directed to the Q DAC.

### DUAL PORT MODE

In dual port mode, data for each DAC is received on the respective input bus (P1D[15:0] or P2D[15:0]). I and Q data arrive simultaneously and are sampled on the rising edge of the DATACLK signal. The TXENABLE signal must be high to enable the transmit path.

### INPUT DATA REFERENCED TO DATACLK

The simplest method of interfacing to the AD9776A/AD9778A/AD9779A is when the input data is referenced to the DATACLK output. The DATACLK output is a buffered version (with some fixed delay) of the internal clock that is used to latch the input data. Therefore, if setup and hold times of the input data with respect to DATACLK are met, the input data is latched correctly. Detailed timing diagrams for the single and dual port cases using DATACLK as the timing reference are shown in Figure 82.

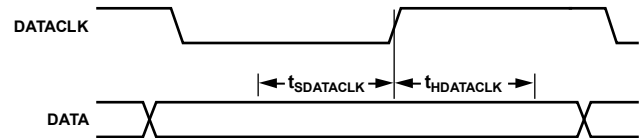


Figure 82. Input Data Port Timing, Data Referenced to DATACLK

Table 28 shows the setup and hold time requirements for the input data over the operating temperature range of the device. Also shown is the keep out window (KOW). The keep out window is the sum of the setup and hold times of the interface. This is the minimum amount of time valid data must be presented to the device to ensure proper sampling.

### DATACLK Frequency Settings

The DATACLK signal is derived from the internal DAC sample clock, DACCLK. The frequency of the DATACLK output depends on several programmable settings. Normally, the frequency of DATACLK is equal to the input data rate. The relationship between the frequency of DACCLK and DATACLK is

$$f_{\text{DATACLK}} = \frac{f_{\text{DACCLK}}}{IF \times ZS \times SP \times \text{DATACLKDIV}}$$

where the variables *IF*, *ZS*, *SP*, and *DATACLKDIV* have the values shown in Table 27.

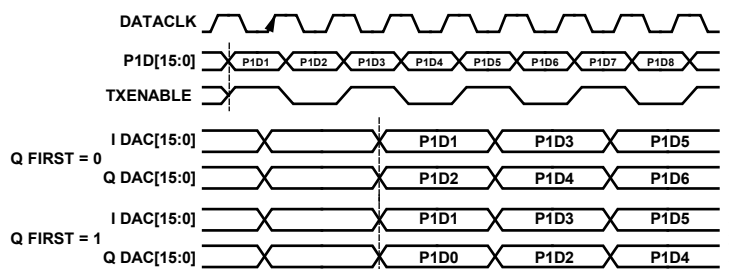


Figure 83. Single Port Mode Digital Interface Timing

The DATACLKDIV only affects the DATACLK output frequency, not the frequency of the data sampling clock. To maintain an  $f_{\text{DATACLK}}$  frequency that samples the input data that remains consistent with the expected data rate, DATACLKDIV should be set to 00.


**Table 27. DACCLK to DATACLK Divisor Values**

| Variable   | Value                                                             | Address  |       |
|------------|-------------------------------------------------------------------|----------|-------|
|            |                                                                   | Register | Bit   |
| IF         | Interpolation factor (1, 2, 4, or 8)                              | 0x01     | [7:6] |
| ZS         | 1, if zero stuffing is disabled<br>2, if zero stuffing is enabled | 0x01     | [0]   |
| SP         | 0.5, if single port is enabled<br>1, if dual port is selected     | 0x02     | [6]   |
| DATACLKDIV | 1, 2, or 4                                                        | 0x03     | [5:4] |

## INPUT DATA REFERENCED TO REFCLK


In some systems, it may be more convenient to use the REFCLK input than the DATACLK output as the input data timing reference. If the frequency of DACCLK is equal to the frequency of the data input (without interpolation), then the data with respect to REFCLK± timing specifications in Table 28 apply directly without further considerations. If the frequency of DACCLK is greater than the frequency of the input data, a divider is used to generate the DATACLK output (and the internal data sampling clock). This divider creates a phase ambiguity between REFCLK and DATACLK, which results in uncertainty in the sampling time. To establish fixed setup and hold times of the data interface, this phase ambiguity must be eliminated.

To eliminate the phase ambiguity, the SYNC\_I input pins (Pin 13 and Pin 14) must be used to force the data to be sampled on a specific REFCLK edge. The relationship among REFCLK, SYNC\_I, and input data is shown in Figure 84 and Figure 85. Therefore, both SYNC\_I and data must meet the timing in Table 28 for reliable data transfer into the device.

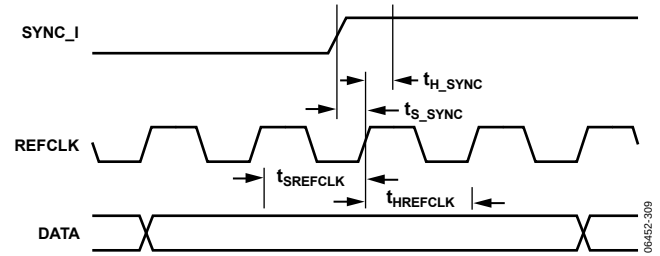

**Figure 84. Input Data Port Timing, Data Referenced to REFCLK,  $f_{\text{DACCLK}} = f_{\text{REFCLK}}$**

Note that even though the setup and hold times of SYNC\_I are relative to REFCLK, the SYNC\_I input is sampled at the internal DACCLK rate. In the case where the PLL is employed, SYNC\_I must be asserted to meet the setup time with respect to REFCLK ( $t_{\text{S\_SYNC}}$ ), but cannot be asserted prior to the previous rising edge of the internal SYNC\_I sample clock. In other words, the SYNC\_I assert edge has to be placed between its successive keep out windows that replicate at the DACCLK rate, not the REFCLK rate. The valid window for asserting SYNC\_I is shaded gray in Figure 85 for the case where the PLL provides a DACCLK frequency of four times the REFCLK frequency. Thus, the minimum setup time is  $t_{\text{S\_SYNC}}$ , and the maximum setup time is  $t_{\text{DACCLK}} - t_{\text{H\_SYNC}}$ .

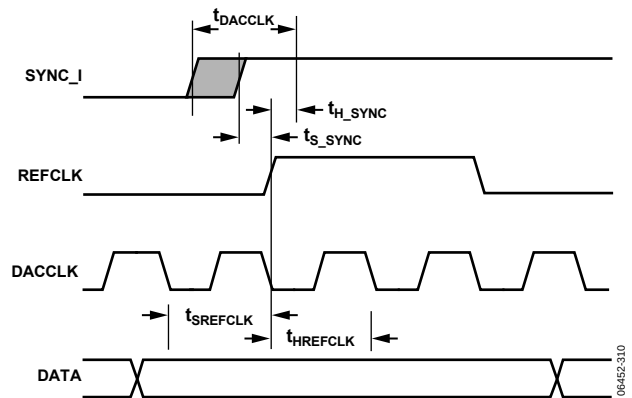

**Figure 85. Input Data Port Timing, Data Referenced to REFCLK,  $f_{\text{DACCLK}} = f_{\text{REFCLK}} \times 4$**

More details of the synchronization circuitry are found in the Device Synchronization section of this data sheet.

**Table 28. Data Timing Specifications vs. Temperature**

| Timing Parameter             | Temperature    | PLL Disabled            |                         |              | PLL Enabled             |                         |              |
|------------------------------|----------------|-------------------------|-------------------------|--------------|-------------------------|-------------------------|--------------|
|                              |                | Min $t_{\text{S}}$ (ns) | Min $t_{\text{H}}$ (ns) | Min KOW (ns) | Min $t_{\text{S}}$ (ns) | Min $t_{\text{H}}$ (ns) | Min KOW (ns) |
| Data with Respect to REFCLK± | −40°C          | −0.80                   | 3.35                    | 2.55         | −0.83                   | 3.87                    | 2.99         |
|                              | +25°C          | −1.00                   | 3.50                    | 2.50         | −1.06                   | 4.04                    | 2.98         |
|                              | +85°C          | −1.10                   | 3.80                    | 2.70         | −1.19                   | 4.37                    | 3.16         |
|                              | −40°C to +85°C | −0.80                   | 3.80                    | 3.00         | −0.83                   | 4.37                    | 3.54         |
| Data with Respect to DATACLK | −40°C          | 2.50                    | −0.05                   | 2.45         | 2.50                    | −0.05                   | 2.45         |
|                              | +25°C          | 2.70                    | −0.20                   | 2.50         | 2.70                    | −0.20                   | 2.50         |
|                              | +85°C          | 3.00                    | −0.40                   | 2.60         | 3.00                    | −0.40                   | 2.60         |
|                              | −40°C to +85°C | 3.00                    | −0.05                   | 2.95         | 3.00                    | −0.05                   | 2.95         |
| SYNC_I± to REFCLK±           | −40°C          | 0.30                    | 0.65                    | 0.95         | 0.27                    | 1.17                    | 1.39         |
|                              | +25°C          | 0.25                    | 0.75                    | 1.00         | 0.19                    | 1.29                    | 1.48         |
|                              | +85°C          | 0.15                    | 0.90                    | 1.05         | 0.06                    | 1.47                    | 1.51         |
|                              | −40°C to +85°C | 0.30                    | 0.90                    | 1.20         | 0.27                    | 1.47                    | 1.74         |

## OPTIMIZING THE DATA INPUT TIMING

The AD9776A/AD9778A/AD9779A have on-chip circuitry that enables the user to optimize the input data timing by adjusting the relationship between the DATACLK output and DCLK\_SMP (the internal clock that samples the input data). This optimization is made by a sequence of 3-wire interface register read and write operations. The timing optimization can be done under strict control of the user, or the device can be programmed to maintain a configurable timing margin automatically. This function is only available when the input data is referenced to the DATACLK output. Each of these methods is detailed in the following section.

Figure 86 shows the circuitry that detects sample timing errors and adjusts the data interface timing. The DCLK\_SMP signal is the internal clock used to latch the input data. Ultimately, it is the rising edge of this signal that needs to be centered in the valid sampling period of the input data. This is accomplished by adjusting the time delay,  $t_D$ , which changes the DATACLK timing and, as a result, the arrival time of the input data with respect to DCLK\_SMP.

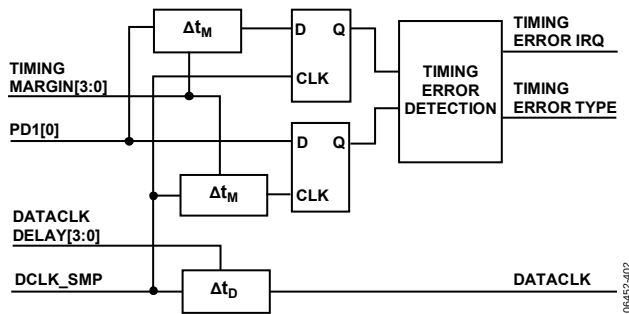


Figure 86. Timing Error Detection and Optimization Circuitry

The error detect circuitry works by creating two sets of sampled data (referred to as the margin test data) in addition to the actual sampled data used in the device data path. One set of sampled data is latched before the actual data sampling point. The other set of sampled data is latched after the actual data sampling point. If the margin test data match the actual data, the sampling is considered valid and no error is declared. If there is a mismatch between the actual data and the margin test data, an error is declared.

The Data Timing Margin[3:0] variable determines how much before and after the actual data sampling point the margin test data are latched. Therefore, the data timing margin variable determines how much setup and hold margin the interface needs for the data timing error IRQ to remain inactive (show error free operation). Therefore, the timing error IRQ is set whenever the setup and hold margins drop below the Data Timing Margin[3:0] value and does not necessarily indicate that the data latched into the device is incorrect.

In addition to setting the data timing error IRQ, the data timing error type bit is indicated when an error occurs. The data timing error type bit is set low to indicate a hold error and high to indicate a setup error. Figure 87 shows a timing diagram of the data interface and the status of the data timing error type bit.

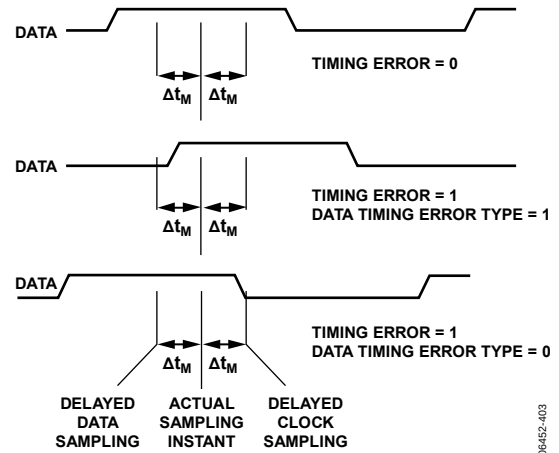


Figure 87. Timing Diagram of Margin Test Data

## Automatic Timing Optimization

When automatic timing optimization mode is enabled (Register 0x03, Bit 7 = 1), the device continuously monitors the data timing error IRQ and data timing error type bits. The DATACLK Delay[3:0] is increased if a setup error is detected and decreased if a hold error is detected. The value of the DATACLK Delay[3:0] setting currently in use can be read back by the user.

## Manual Timing Optimization

When the device is operating in manual timing optimization mode (Register 0x03, Bit 7 = 0), the device does not alter the DATACLK Delay[3:0] value from what is programmed by the user. By default, the DATACLK delay enable bit is inactive. This bit must be set high for the DATACLK Delay[3:0] value to be realized. The delay (in absolute time) when programming DATACLK delay between 00000 and 11111 varies from about 700 ps to about 6.5 ns. The typical delays per increment over temperature are shown in Table 29.

Table 29. Data Delay Line Typical Delays Over Temperature

| Delay                                            | -40°C | +25°C | +85°C | Unit |
|--------------------------------------------------|-------|-------|-------|------|
| Zero Code Delay (Delay Upon Enabling Delay Line) | 630   | 700   | 740   | ps   |
| Average Unit Delay                               | 175   | 190   | 210   | ps   |

When the device is placed into manual mode, the error checking logic is activated. If the IRQs are enabled, an interrupt is generated if a setup/hold violation is detected. One error check operation is performed per device configuration. Any change to the Data Timing Margin[3:0] or DATACLK Delay[3:0] values triggers a new error check operation.



## DEVICE SYNCHRONIZATION

System demands can impose two different requirements for synchronization. Some systems require multiple DACs to be synchronized to each other. This is the case when supporting transmit diversity or beam forming, where multiple antennas are used to transmit a correlated signal. In this case, the DAC outputs need to be phase aligned with each other, but there may not be a requirement for the DAC outputs to be aligned with a system level reference clock. In systems with a time division multiplexing transmit chain, one or more DACs may need to be synchronized with a system level reference clock. The options for synchronizing devices under these two conditions are described in the Synchronization Logic Overview section and the Synchronizing Devices to a System Clock section.

### SYNCHRONIZATION LOGIC OVERVIEW

Figure 88 shows the block diagram of the on-chip synchronization logic. The basic operation of the synchronization logic is to generate a single DACCLK-cycle-wide initialization pulse that sets the clock generation state machine logic to a known state. This initialization pulse loads the clock generation state machine with the Clock State[4:0] value as its next state. If the initialization pulse from the synchronization logic is generated properly, it is active for one DACCLK cycle, every 32 DACCLK cycles. Because the clock generation state machine has 32 states operating at the DACCLK rate, every initialization pulse received after the first pulse loads the state in which the state machine is already in, maintaining proper clocking operation of the device.

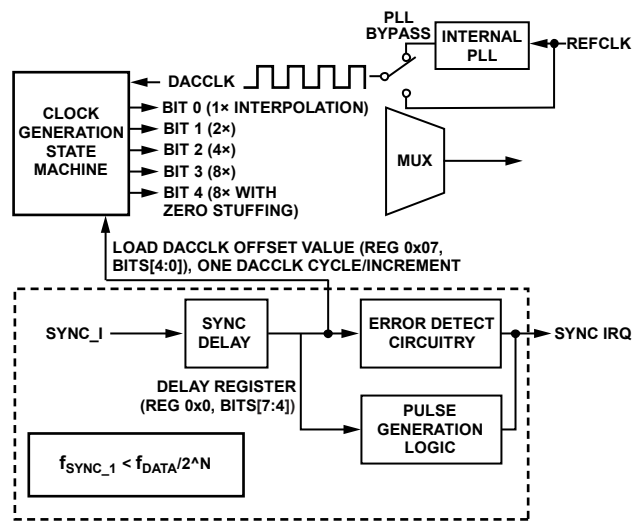


Figure 88. Synchronization Circuitry Block Diagram

Nominally, the SYNC\_I input should have one rising edge every 32 clock cycles (or multiple of 32 clock cycles) to maintain proper synchronization. The pulse generation logic can be programmed to suppress outgoing pulses if the incoming SYNC\_I frequency is greater than DACCLK/32. Extra pulses can be suppressed by the ratios listed in Table 30. The SYNC\_I frequency can be lower than DACCLK/32 as long as output pulses are generated from the pulse generation circuit on a

multiple of 32 DACCLK periods. In any case, the maximum frequency of SYNC\_I must be less than  $f_{\text{DACCLK}}$ .

Table 30. Settings Required to Support Various SYNC\_I Frequencies

| SYNC_I Ratio[2:0] | SYNC_I Rising Edges Required for Synchronization Pulse |
|-------------------|--------------------------------------------------------|
| 000               | 1 (default)                                            |
| 001               | 2                                                      |
| 010               | 4                                                      |
| 011               | 8                                                      |
| 100               | 16                                                     |
| 101               | Invalid setting                                        |
| 110               | Invalid setting                                        |
| 111               | Invalid setting                                        |

As an example, if a SYNC\_I signal with a frequency of  $f_{\text{DACCLK}}/4$  is used, then both 011 and 100 are valid settings for the SYNC\_I Ratio[2:0] value. A setting of 011 results in one initialization pulse being generated every 32 DACCLK cycles, and a setting of 100 results in one initialization pulse being generated every 64 DACCLK cycles. Both cases result in proper device synchronization.

The Clock State[4:0] value is the state to which the clock generation state machine resets upon initialization. By varying this value, the timing of the internal clocks with respect to the SYNC\_I signal can be adjusted. Every increment of the Clock State[4:0] value advances the internal clocks by one DACCLK period.

### Synchronization Timing Error Detection

The synchronization logic has error detection circuitry similar to the input data timing. The SYNC\_I Timing Margin[3:0] variable determines how much setup and hold margin the synchronization interface needs for the sync timing error IRQ bit to remain inactive (that is, to indicate error free operation). Therefore, the sync timing error IRQ bit is set whenever the setup and hold margins drop below the SYNC\_I Timing Margin[3:0] value and, therefore, does not necessarily indicate that the SYNC\_I input was latched incorrectly.

When the sync timing error IRQ bit is set, corrective action can be taken to restore timing margin. One course of action is to temporarily reduce the timing margin until the sync timing error IRQ is cleared. Then, increase the SYNC\_I delay by two increments and check whether the timing margin has increased or decreased. If it has increased, continue incrementing the value of SYNC\_I delay until the margin is maximized. However, if incrementing the SYNC\_I delay reduced the timing margin, then the delay should be reduced until the timing margin is optimized.

## SYNCHRONIZING DEVICES TO A SYSTEM CLOCK

The AD9776A/AD9778A/AD9779A offer a pulse mode synchronization scheme (see Figure 89) to align the DAC outputs of multiple devices within a system to the same DACCLK edge. The internal clocks are synchronized by providing either a one-time pulse or a periodic signal to the SYNC\_I inputs (SYNC\_I+, SYNC\_I-). The SYNC\_I signal is sampled by the internal DACCLK sample rate clock.

The SYNC\_I input frequency has the following constraint:

$$f_{\text{SYNC\_I}} \leq f_{\text{DATA}}$$

When the internal clocks are synchronized, the data-sampling clocks between all devices are phase aligned. The data input timing relationships can be referenced to either REFCLK or DATACLK.

For this synchronization scheme, all devices are slave devices, and the system clock generation/distribution chip serves as the master. It is vital that the SYNC\_I signal be distributed between the DACs with low skew. Likewise, the REFCLK signals must be distributed with low skew. Any skew on these signals between the DACs must be accounted for in the timing budget. Figure 89 shows an example clock and synchronization input scheme.

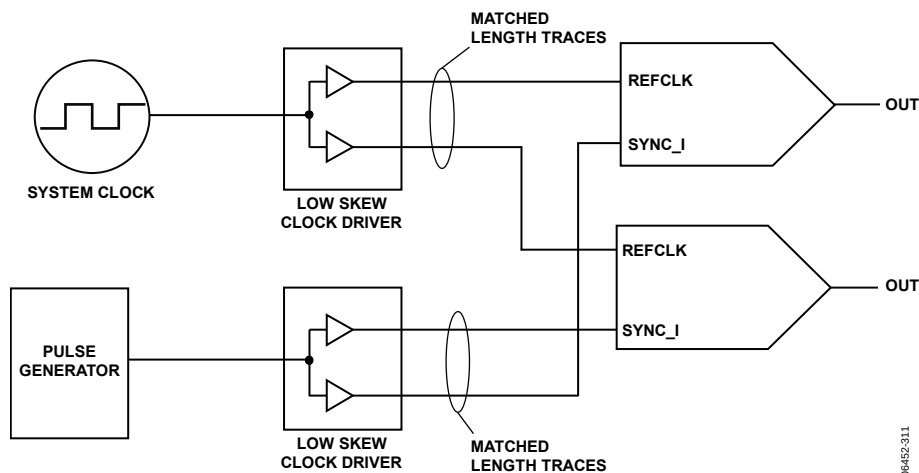


Figure 89. Multichip Synchronization in Pulse Mode

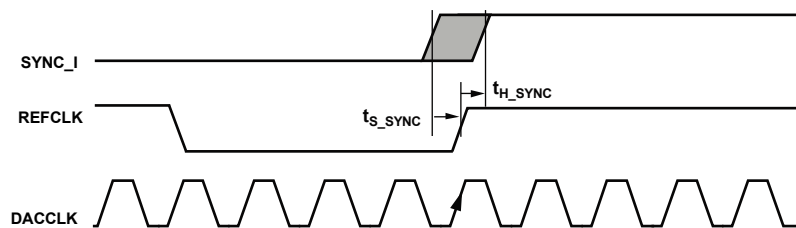


Figure 90. Timing Diagram of SYNC\_I with Respect to REFCLK When Synchronizing Multiple Devices to Each Other

Figure 90 shows the timing of the SYNC\_I input with respect to the REFCLK input. Note that although the timing is relative to the REFCLK signal, SYNC\_I is sampled at the DACCLK rate. This means that the rising edge of the SYNC\_I signal must occur after the hold time of the preceding DACCLK rising edge, not the preceding REFCLK rising edge.

## INTERRUPT REQUEST OPERATION

The IRQ pin (Pin 71) acts as an alert in the event that the device has a timing error and should be queried (by reading Register 0x19) to determine the exact fault condition. The IRQ pin is an open-drain, active low output. The IRQ pin should be pulled high external to the device. This pin can be tied to the IRQ pins of other devices with open-drain outputs to wire-OR these pins together.

There are two different error flags that can trigger an interrupt request: a data timing error flag or a sync timing error flag. By default, when either or both of these error flags are set, the IRQ pin is active low. Either or both of these error flags can be masked to prevent them from activating an interrupt on the IRQ pin.

The error flags are latched and remain active until the interrupt register, Register 0x19, is either read from or the error flag bits are overwritten.

## POWER DISSIPATION

Figure 91 to Figure 99 show the power dissipation of the 1.8 V and 3.3 V digital and clock supplies in single DAC mode and dual DAC mode. In addition to this, the power dissipation/current of the 3.3 V analog supply (mode and speed independent) in single DAC mode is 102 mW/31 mA. In dual DAC mode, this is 182 mW/55 mA. When the PLL is enabled, it adds 50 mA/90 mW to the 1.8 V clock supply.

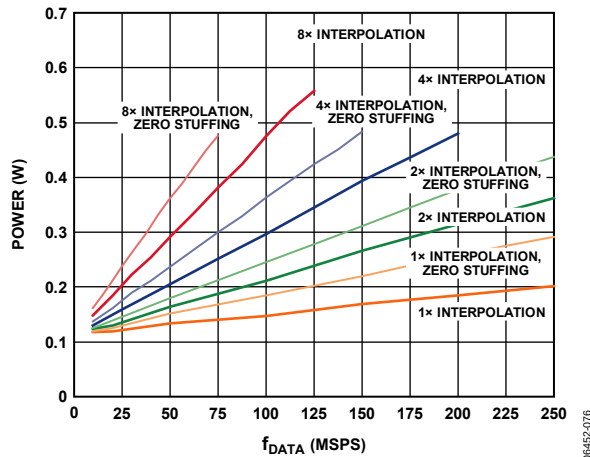


Figure 91. Total Power Dissipation, I Data Only, Real Mode

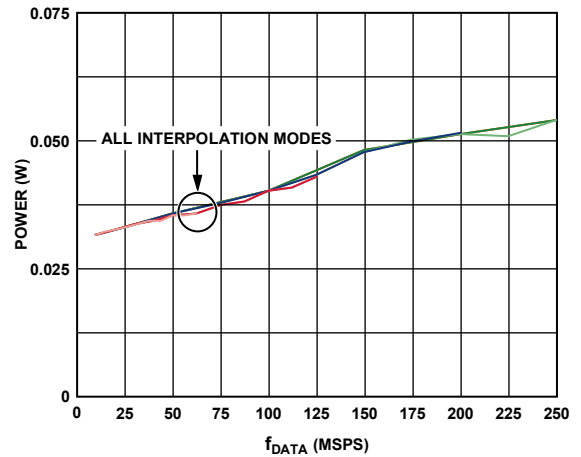


Figure 94. Power Dissipation, Digital 3.3 V Supply, I Data Only, Real Mode, Includes Modulation Modes and Zero Stuffing

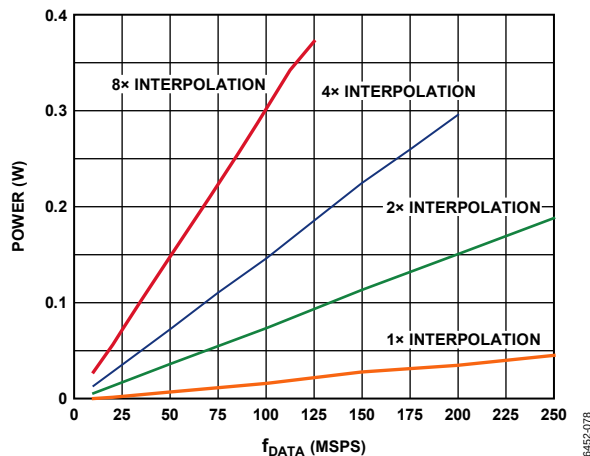


Figure 92. Power Dissipation, Digital 1.8 V Supply, I Data Only, Real Mode, Does Not Include Zero Stuffing

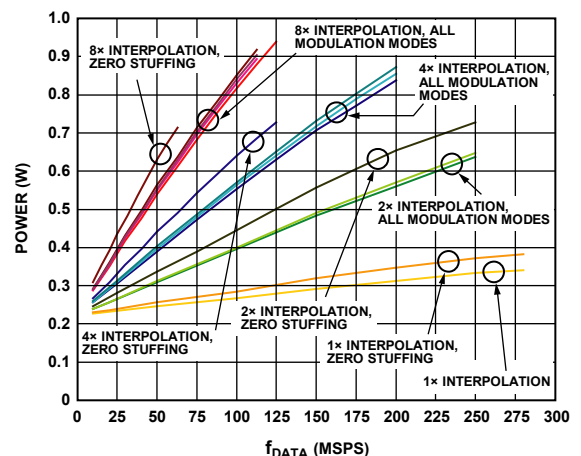


Figure 95. Total Power Dissipation, Dual DAC Mode

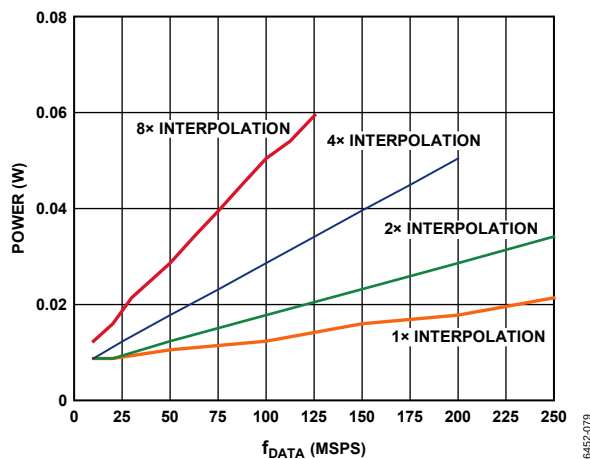


Figure 93. Power Dissipation, Clock 1.8 V Supply, I Data Only, Real Mode, Includes Modulation Modes, Does Not Include Zero Stuffing

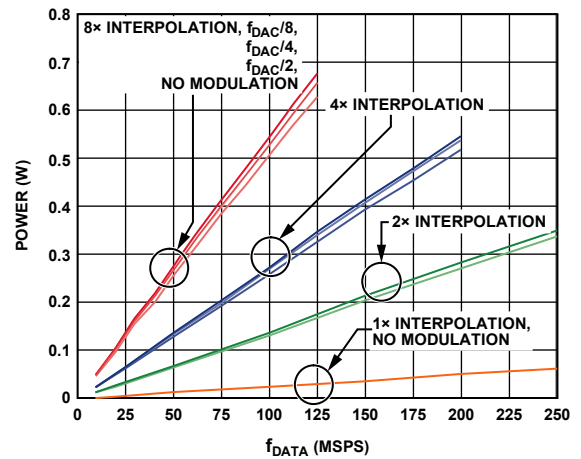


Figure 96. Power Dissipation, Digital 1.8 V Supply, I and Q Data, Dual DAC Mode, Does Not Include Zero Stuffing

POWER-DOWN AND SLEEP MODES

The AD9776A/AD9778A/AD9779A have a variety of power-down modes; thus, the digital engine, main TxDACs, or auxiliary DACs can be powered down individually or together. Via the 3-wire interface port, the main TxDACs can be placed in sleep or power-down mode. In sleep mode, the TxDAC output is turned off, thus reducing power dissipation. The reference remains powered on, however, so that recovery from sleep mode is very fast. With the power-down mode bit set (Register 0x00, Bit 4), all analog and digital circuitry, including the reference, is powered down. The 3-wire interface port remains active in this mode. This mode offers more substantial power savings than sleep mode, but the turn-on time is much longer. The auxiliary DACs also have the capability to be programmed into sleep mode via the 3-wire interface port. The auto power-down enable bit (Register 0x00, Bit 3) controls the power-down function for the digital section of the devices. The auto power-down function works in conjunction with the TXENABLE pin (Pin 39); see Table 31 for details.

Table 31.

| TXENABLE<br>(Pin 39) | Description                                                                                                                                                                                                                                                             |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0                    | If auto power-down enable bit = 0, flush data path with 0s.<br>If auto power-down enable bit = 1, flush data for multiple REFCLK cycles; then, automatically place the digital engine in power-down state. DACs, reference, and 3-wire interface port are not affected. |
| 1                    | Normal operation.                                                                                                                                                                                                                                                       |

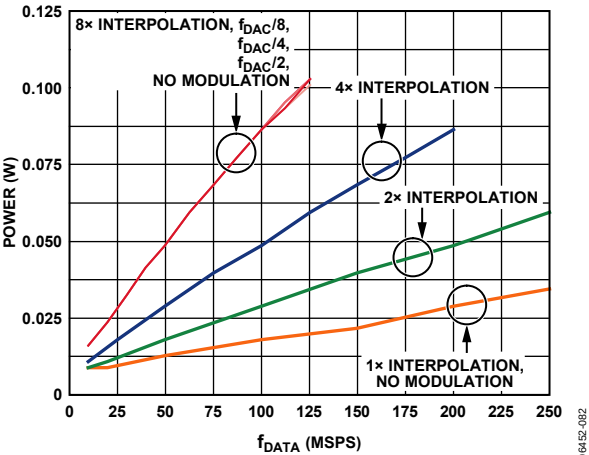


Figure 97. Power Dissipation, Clock 1.8 V Supply, I and Q Data, Dual DAC Mode, Does Not Include Zero Stuffing

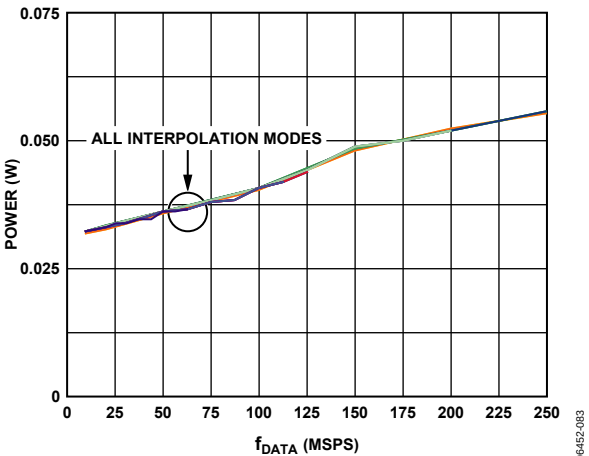


Figure 98. Power Dissipation, Digital 3.3 V Supply, I and Q Data, Dual DAC Mode

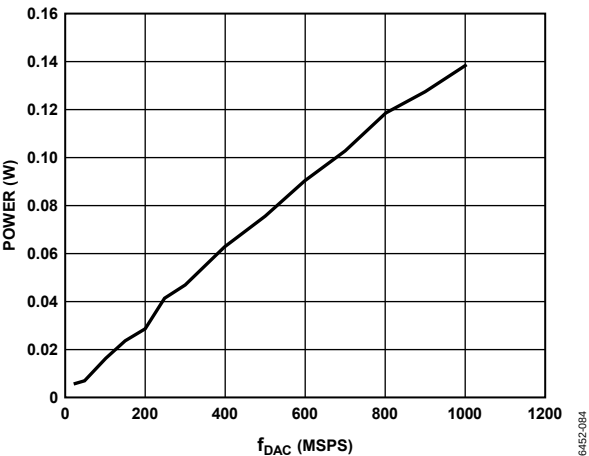


Figure 99. DVDD18 Power Dissipation of Inverse Sinc Filter

## EVALUATION BOARD OVERVIEW

### EVALUATION BOARD OPERATION

The AD9776A/AD9778A/AD9779A evaluation board is provided to help users quickly become familiar with the operation of the device and to evaluate the device performance. To operate the evaluation board, the user needs a PC, a 5 V power supply, a clock source, and a digital data source. The user also needs a spectrum analyzer or an oscilloscope to observe the DAC output.

The typical evaluation setup is shown in Figure 100. A sine or square wave clock can be used to source the DAC sample clock. The spectral purity of the clock directly affects the device performance. A low noise, low jitter clock source is required.

All necessary connections to the evaluation board are shown in more detail in Figure 101.

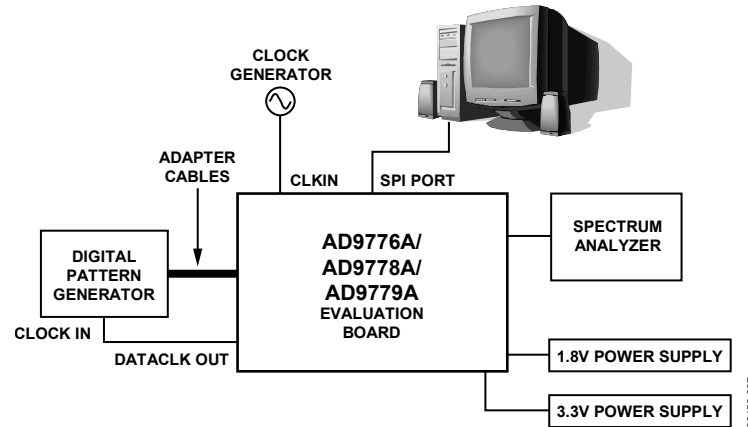


Figure 100. Typical Test Setup

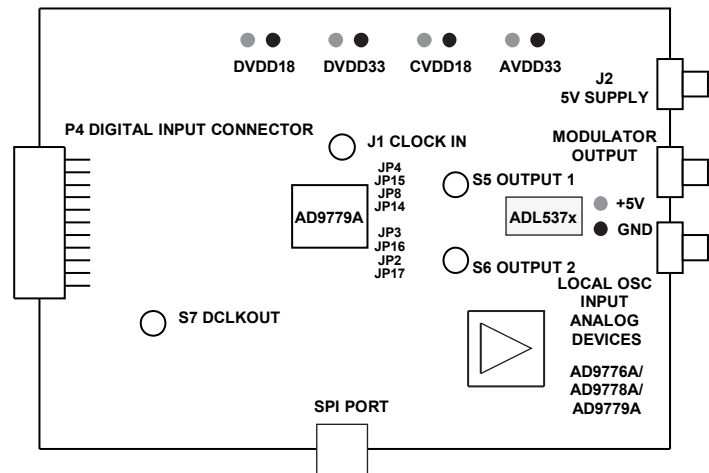


Figure 101. AD9776A/AD9778A/AD9779A Evaluation Board Showing All Connections

# AD9776A/AD9778A/AD9779A

The evaluation board comes with software that allows the user to program the on-chip configuration registers. Via the 3-wire interface port, the devices can be programmed into any of its various operating modes. The default software window is shown in Figure 102.

The evaluation board also comes populated with the ADL537x modulator to allow for the evaluation of an RF subsystem. Complete details on the evaluation board and the 3-wire interface software can be downloaded from the Analog Devices website.


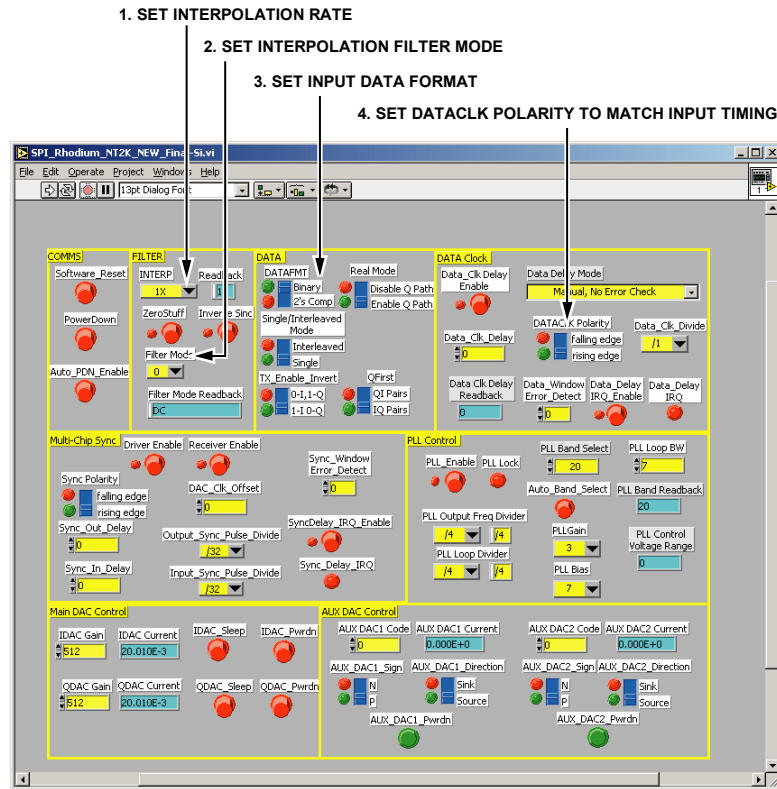


Figure 102. 3-Wire Interface Port Software Window

## OUTLINE DIMENSIONS

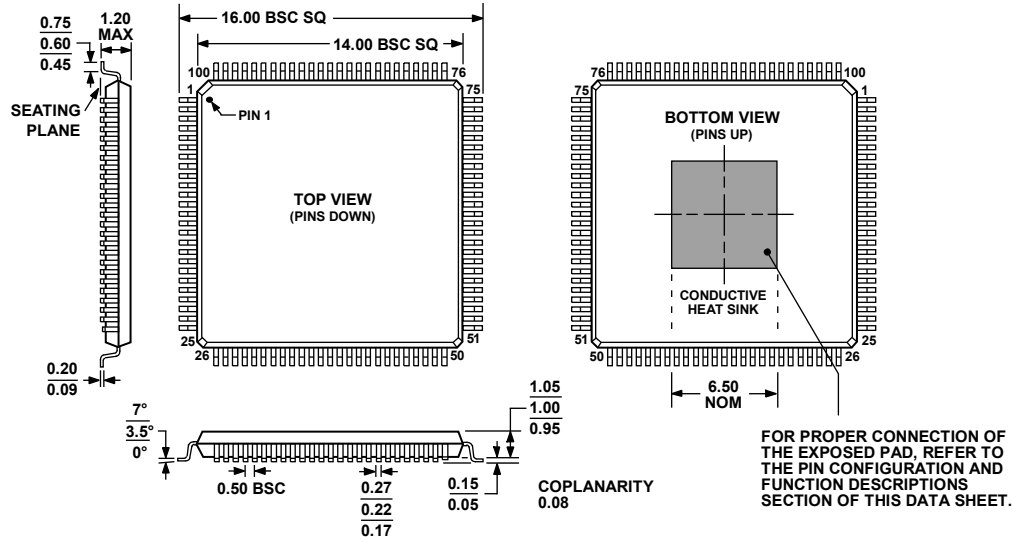

COMPLIANT TO JEDEC STANDARDS MS-026-AED-HDT

Figure 103. 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP\_EP]  
(SV-100-1)

Dimensions shown in millimeters

072408-A

## ORDERING GUIDE

| Model                      | Temperature Range | Package Description                                    | Package Option |
|----------------------------|-------------------|--------------------------------------------------------|----------------|
| AD9776ABSVZ <sup>1</sup>   | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9776ABSVZRL <sup>1</sup> | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9778ABSVZ <sup>1</sup>   | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9778ABSVZRL <sup>1</sup> | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9779ABSVZ <sup>1</sup>   | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9779ABSVZRL <sup>1</sup> | −40°C to +85°C    | 100-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-100-1       |
| AD9776A-EBZ <sup>1</sup>   |                   | Evaluation Board                                       |                |
| AD9778A-EBZ <sup>1</sup>   |                   | Evaluation Board                                       |                |
| AD9779A-EBZ <sup>1</sup>   |                   | Evaluation Board                                       |                |

<sup>1</sup> Z = RoHS Compliant Part.

## **NOTES**