
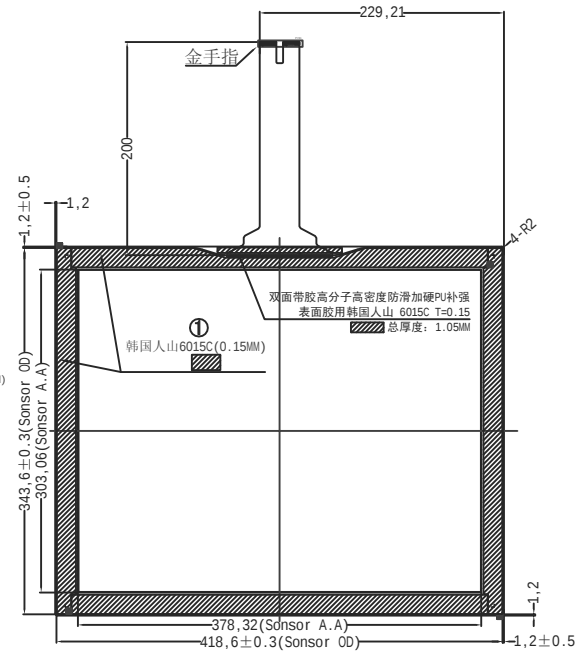
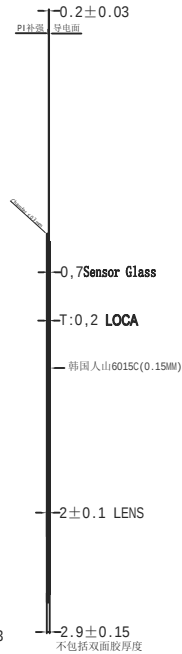


NO.	Rev.	Revision Record	Date
①	A0	在WGJ19001B-GDA-B6的基础上双面结构由8条改为四条;	2014-07-30

正面视图

侧面视图


背面视图

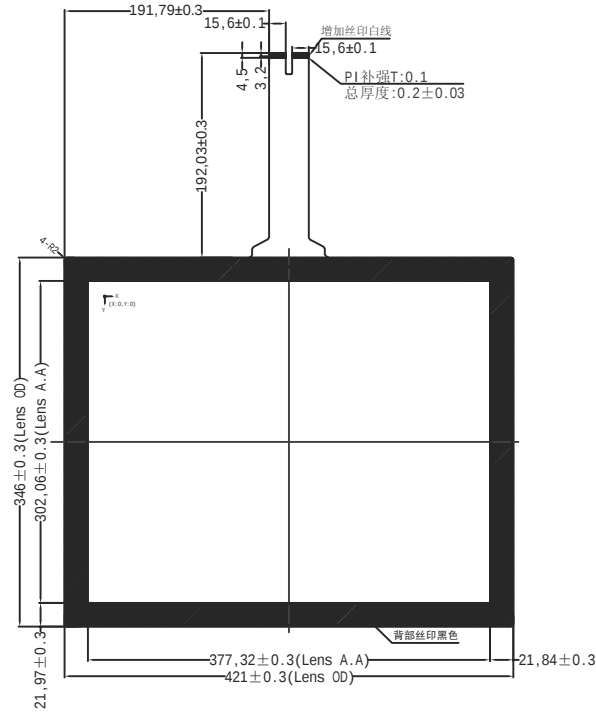

PIN	定义
1	GND
2	D+
3	D-
4	VDD/5V

技术参数:

1. COVER LENS 为南玻光学强化玻璃;强化深度: 8-10um;
2. FPC接口线为COB全出PIN接口;
3. PCB板IC: ILI2302M, 触摸通道: RX47*TX37;
4. 接口PIN是0.3*102,
5. 表面硬度为7H;
6. 透光率为87%以上;
7. 未注明公差为±0.2mm;
8. 产品符合RoHS标准.

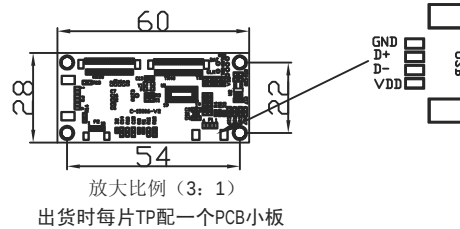

PIN/A	#
PIN1	GND
PIN2-PIN38	TX1-TX37
PIN39-PIN41	NC
PIN42	GND
PIN43	GND
PIN44-PIN90	RX47-RX1
PIN91-PIN93	NC
PIN94	GND
PIN95-PIN102	NC

TP结构

Sheet	1 of 1	Model NO.	WGJ19001B-GDA-C6		
UNIT	mm	CUSTOMER P/N			
Rev.	A0	Designed	PLX	Date	2015-07-30
Scale	FIT	Checked	SLA	Date	2015-07-30
Approved				Date	