

GSTSS8050LT1

NPN General Purpose Transistor


Product Description


This device is designed as a general purpose amplifier and switch.

Features

- Collector-Emitter Voltage : 25V
- Collector-Base Voltage : 40V
- Collector Current : 1500mA
- Lead(Pb)-Free

Packages & Pin Assignments


SOT-23	
	
Pin	Description
1	Base
2	Emitter
3	Collector



Marking Information

P/N	Package	Part Marking
GSTSS8050LT1F(P)	SOT-23	1HA
GSTSS8050LT1F(Q)	SOT-23	1HC
GSTSS8050LT1F(R)	SOT-23	1HE
GSTSS8050LT1F(S)	SOT-23	1HG

Ordering Information

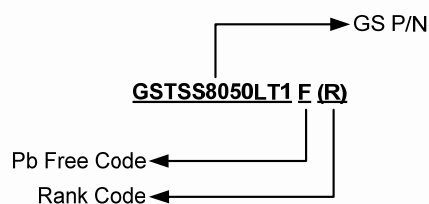

Part Number	Package	Quantity
GSTSS8050LT1F(P or Q or R or S)	SOT-23	3000 PCS

Absolute Maximum Ratings

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Conditions	Typical	Unit
V_{CEO}	Collector-Emitter Voltage	25	V
V_{CBO}	Collector-Base Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current-Continuous	1500	mA
P_D	Total Device Dissipation FR-5 Board (1) $T_A=25^{\circ}\text{C}$ Derate above 25°C	225	mW
		1.8	mW/ $^{\circ}\text{C}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	556	$^{\circ}\text{C/W}$
P_D	Total Device Dissipation Alumina Substrate (2) $T_A=25^{\circ}\text{C}$ Derate above 25°C	300	mW
		2.4	mW/ $^{\circ}\text{C}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	417	$^{\circ}\text{C/W}$
T_J	Junction Temperature Range	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

Note 1.FR-5=1.0x0.75x0.062 in

Note 2.Alumina=0.4x0.3x0.024 in. 99.5% alumina

Electrical Characteristics

($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Symbol	Conditions	Min	Max	Unit
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=0.1\text{mA}$, $I_B=0\text{mA}$)	25	-	V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu\text{A}$, $I_E=0\text{mA}$)	40	-	V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=100\mu\text{A}$, $I_C=0\text{mA}$)	5.0	-	V
I_{CBO}	Collector-Base Cutoff Current ($V_{CB}=35\text{V}$, $I_E=0\text{mA}$)	-	0.15	μA
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB}=4.0\text{V}$, $I_C=0\text{mA}$)	-	0.15	μA
h_{FE}	DC Current Gain ($I_C=100\text{mA}$, $V_{CE}=1.0\text{V}$)	100	600	-
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=800\text{mA}$, $I_B=80\text{mA}$)	-	0.5	V

Classification of h_{FE}

Rank	P	Q	R	S
Range	100-200	150-300	200-400	300-600
Marking	1HA	1HC	1HE	1HG

Package Dimension

SOT-23

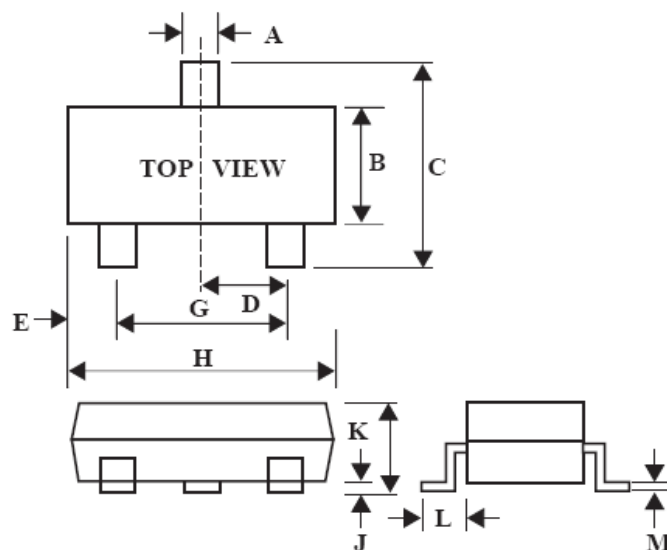

Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.35	0.51	0.014	0.020
B	1.19	1.40	0.047	0.055
C	2.10	3.00	0.083	0.118
D	0.85	1.05	0.033	0.041
E	0.46	1.00	0.018	0.039
G	1.70	2.10	0.067	0.083
H	2.70	3.10	0.106	0.122
J	0.01	0.13	0.000	0.005
K	0.89	1.10	0.035	0.043
L	0.30	0.61	0.011	0.024
M	0.076	0.25	0.002	0.010

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd NeiHu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

Wu-Xi Branch	
	No.21 Changjiang Rd., WND, Wuxi, Jiangsu, China (INFO. &. TECH. Science Park Building A 210 Room)
	86-510-85217051
	86-510-85211238
	sales_cn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587