



△1 SPECIFICATION


Current Rating: 3A AC/DC
Voltage Rating: 250V AC Max.
Operation Temperature: -25°C~+85°C
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 1000V AC/Minute
Contact: Brass, Tin Plated
△3△2 Insulator: PA66(UL94V-0), Nature
RoHS Compliant

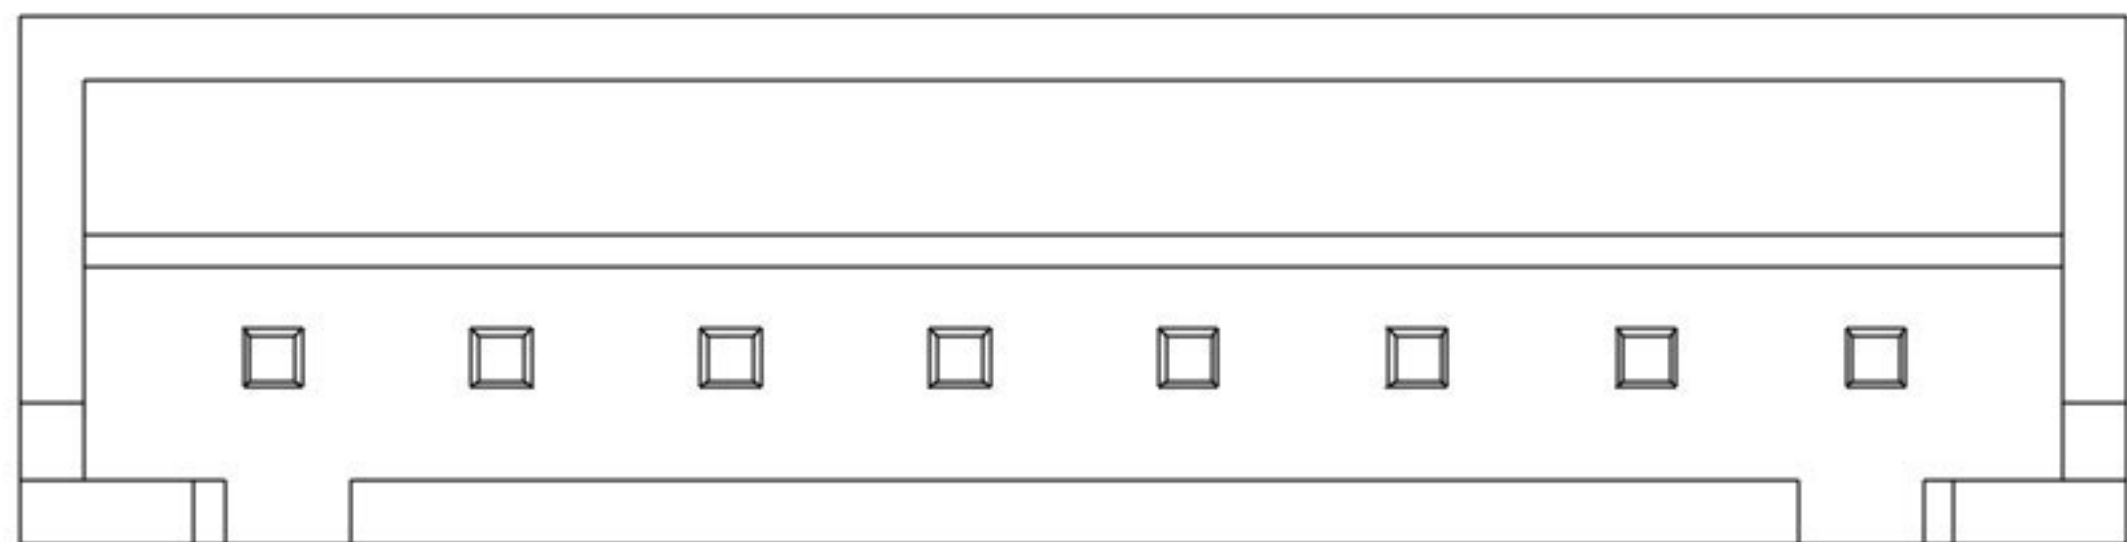


△2△1

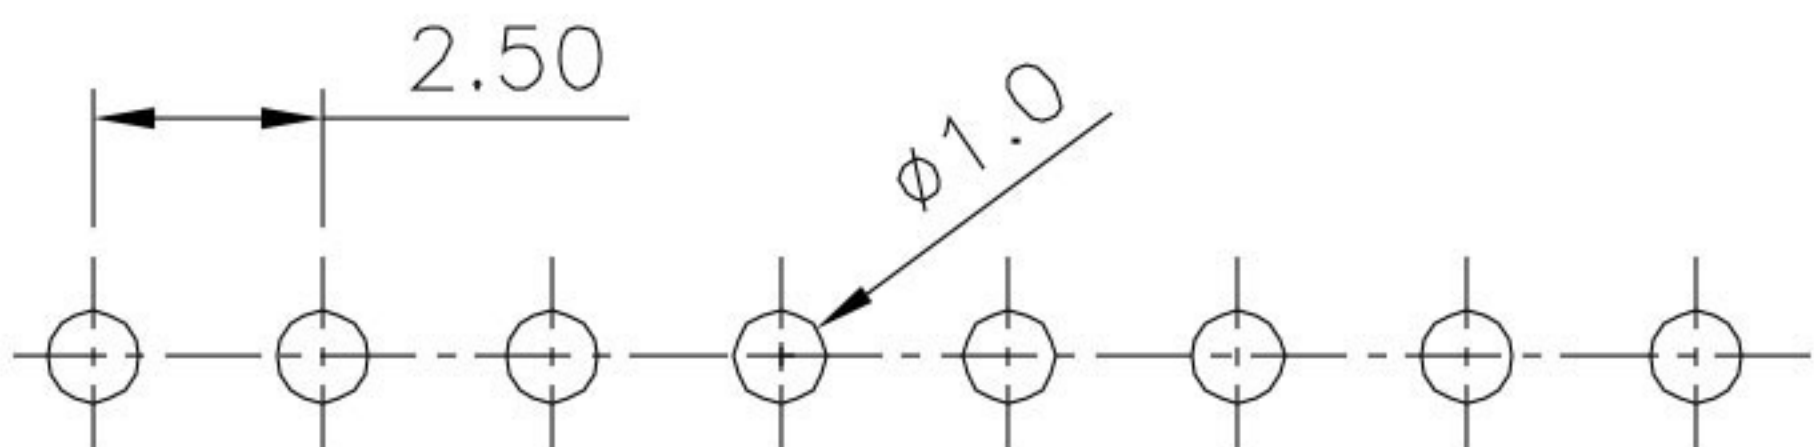


Recommended P.C.B. Layout

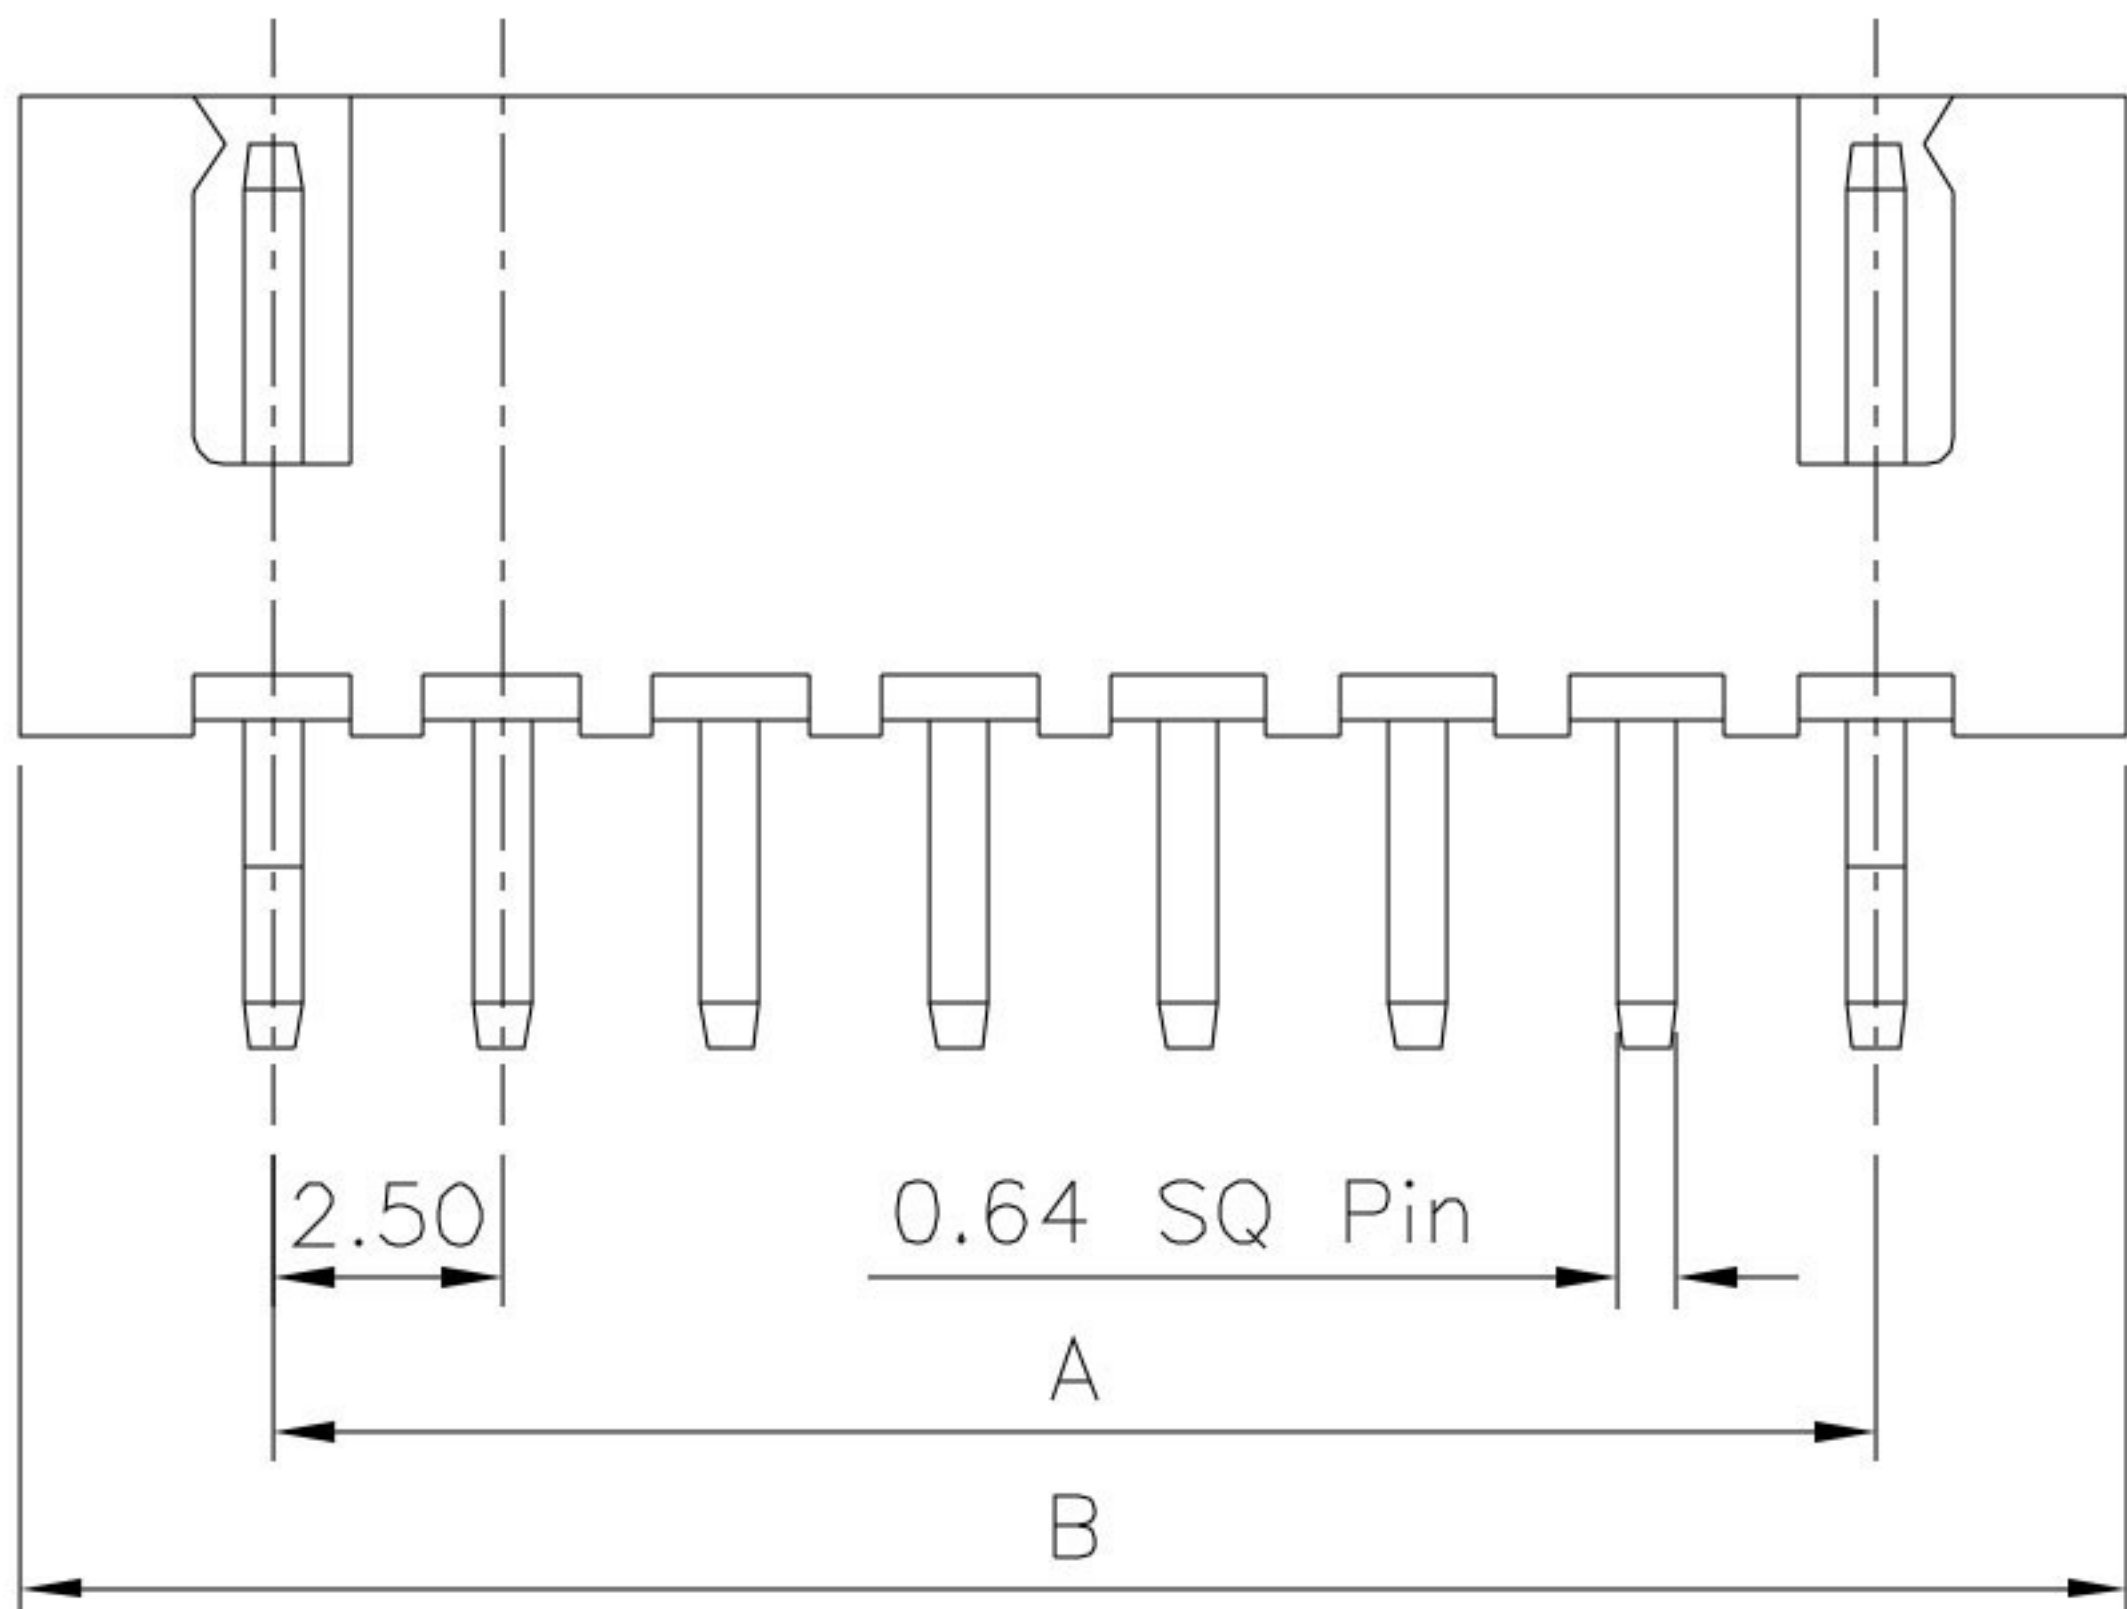


△2△1 3~12 Pin

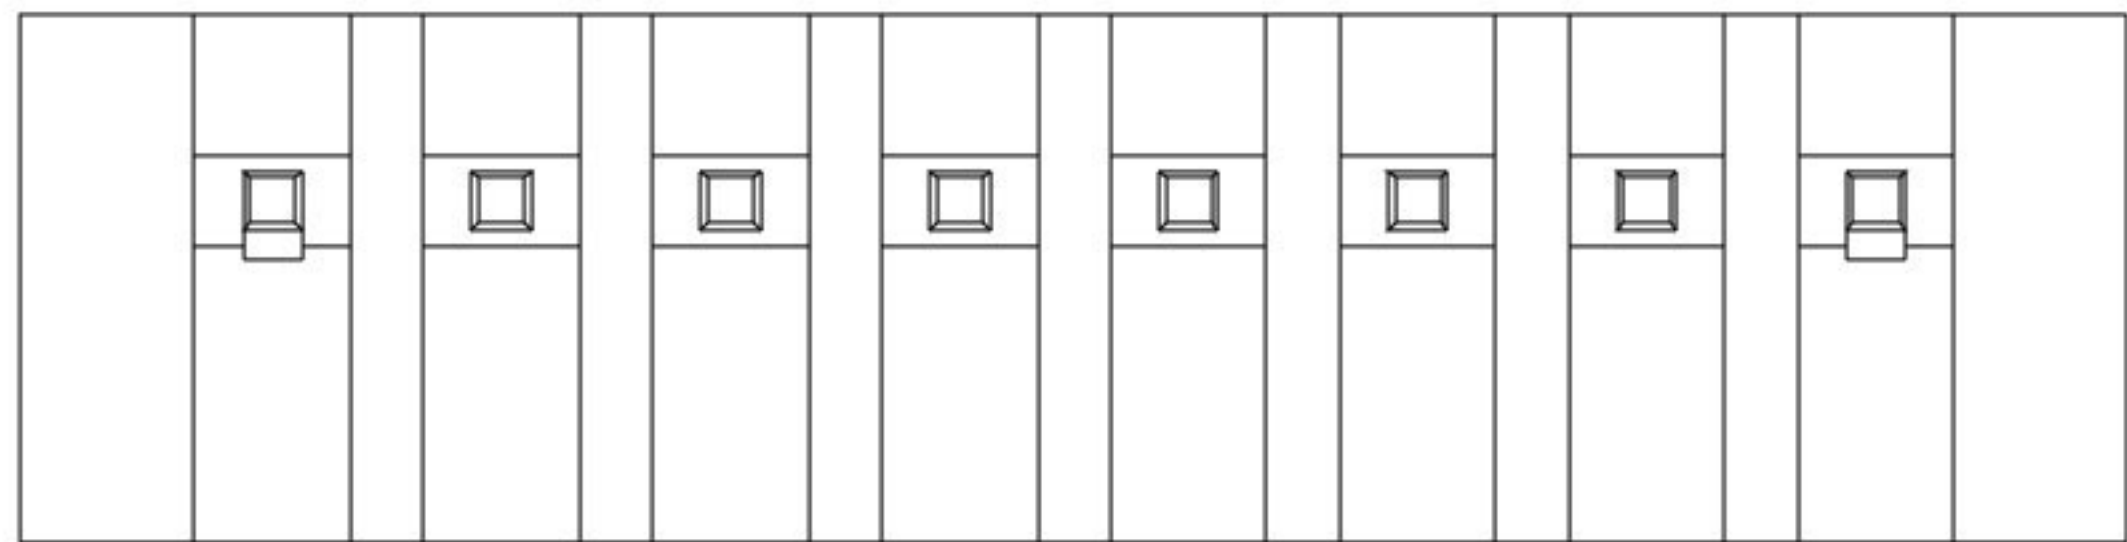


△1

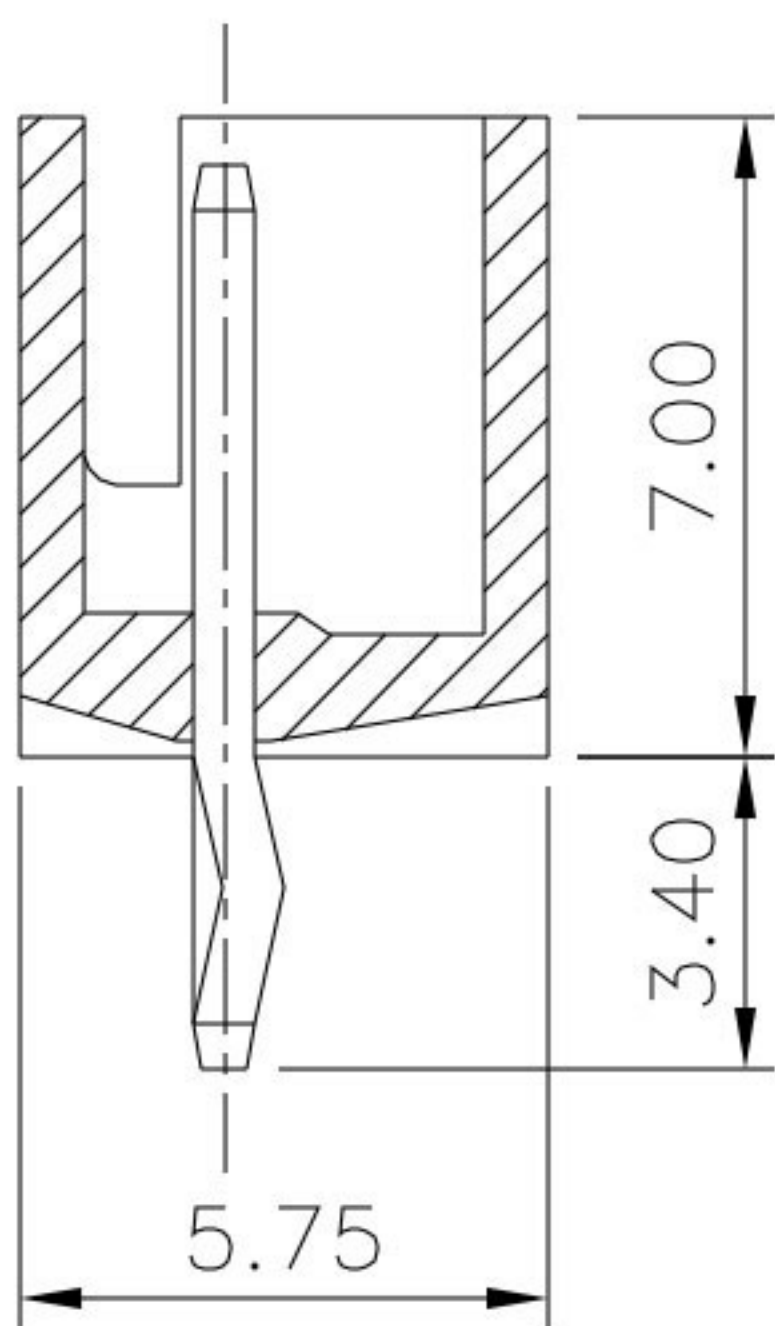

△1

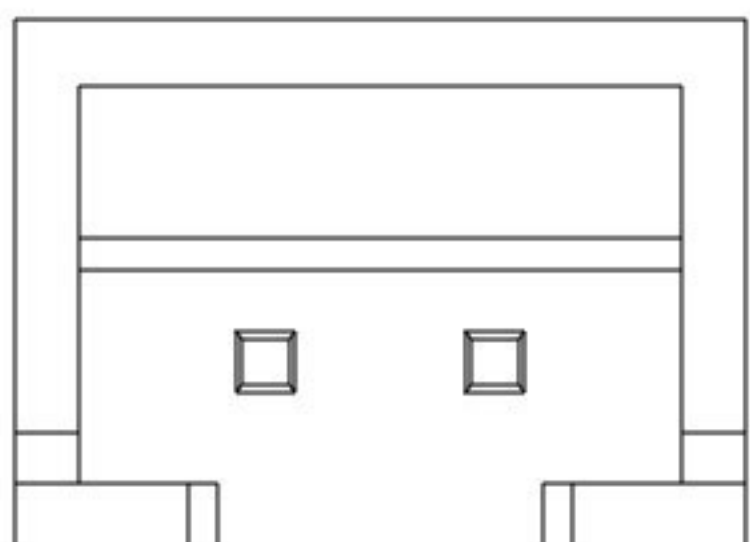

△2△1

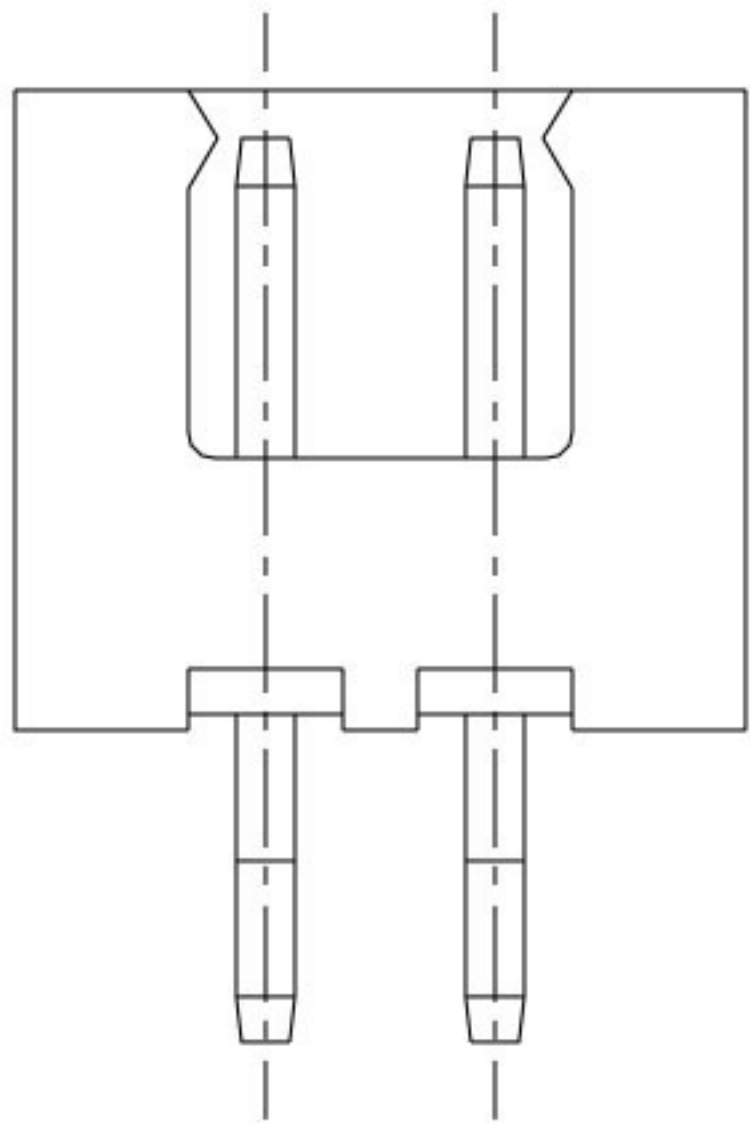

△2△1 2 Pin

△2△1

Pin	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
20	47.50	52.50



DRAWING No.

01600

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.35
.XX ±0.25

UNIT
mm

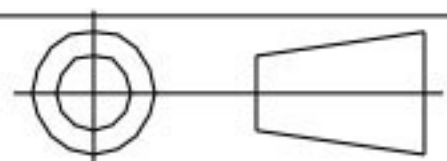

△3

A3

Modify Data

HZF

03/03/2016

△2

A2

Modify Data

HZF

03/17/2015

△1

A1

Modify Data

HZF

02/23/2011

△0

A0

NEW RELEASE

HZF

08/24/2009

NO. REV.

REVISIONS

CHK

DATE