

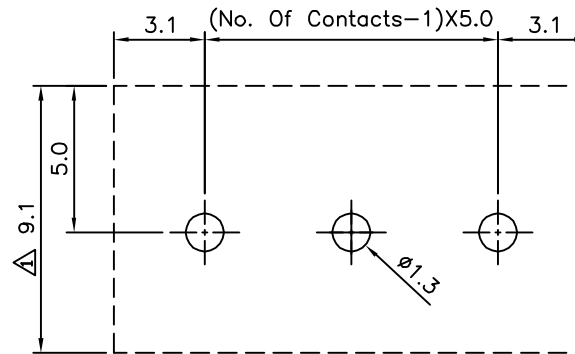
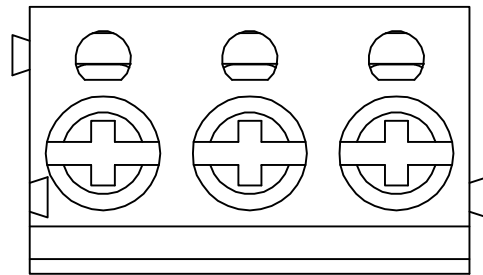


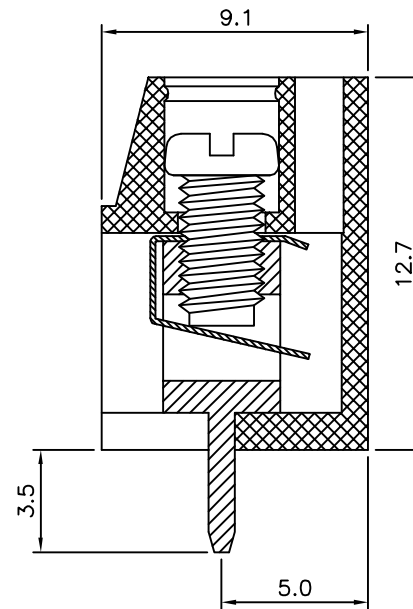

Recommended P.C.B. Layout

△△ SPECIFICATION

Current Rating:15 Amps/Way Max.
Voltage Rating:250V AC
Contact Resistance:20 Milliohms Max.
Withsanding Voltage:2500V AC(1 Min.)
Test Time=60 Sec./1 PCS
Wire Range:14~24 AWG
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
10 Seconds Max.
Torque:4.0kgf.cm/M3.0
△ Insulator:Polyamide(UL94V-0),Blue
Contact:Copper Alloy,Tin Plated
Terminal Screw:Steel
Galvanized With Cr3+ Plated
Wire Guard:Stainless Steel
Surface Of Solder Tails:Tin Plated
RoHS Compliant

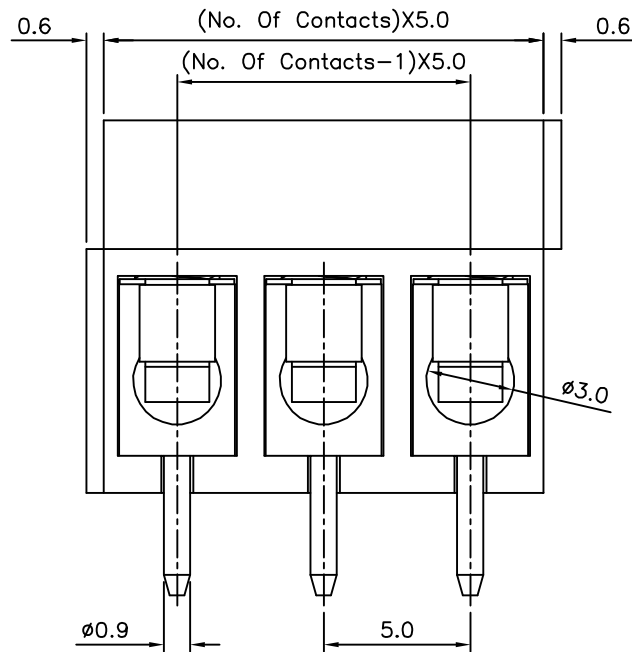

DRAWING No.

20004

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WZL


REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	02/14/2012
△A2		Modify Data	HZF	10/19/2010
△A1		Modify Data	HZF	05/11/2010
△A0		NEW RELEASE	HZF	07/23/2009