

DESCRIPTION


2SC1945 is a silicon NPN epitaxial planar type transistor designed for RF power amplifiers on HF band mobile radio applications.

FEATURES

- High power gain: $G_{pe} \geq 14.5\text{dB}$
@ $V_{CC} = 12\text{V}$, $P_O = 14\text{W}$, $f = 27\text{MHz}$
- Emitter ballasted construction for high reliability and good performances.
- TO-220 package similarly is convenient for mounting.
- Ability of withstanding infinite load VSWR when operated at $V_{CC} = 16\text{V}$, $P_O = 18\text{W}$, $f = 27\text{MHz}$.

APPLICATION

10 to 14 watts output power class AB amplifiers applications in HF band.

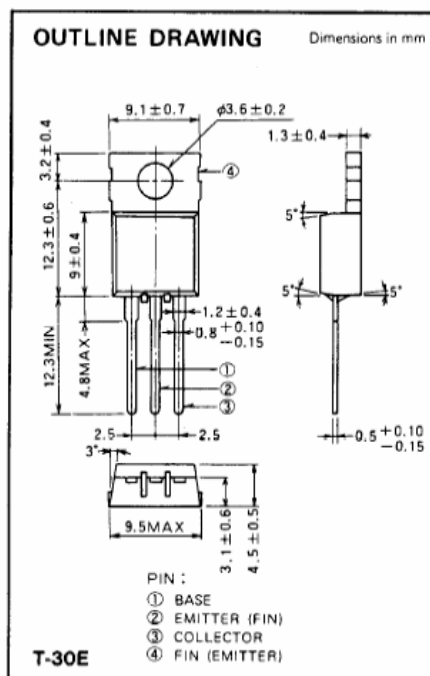

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CBO}	Collector to base voltage		80	V
V_{EBO}	Emitter to base voltage		5	V
V_{CEO}	Collector to emitter voltage	$R_{BE} = \infty$	40	V
I_C	Collector current		6	A
P_C	Collector dissipation	$T_A = 25^\circ\text{C}$	1.5	W
		$T_C = 25^\circ\text{C}$	20	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55 to 150	$^\circ\text{C}$
R_{th-a}	Thermal resistance	Junction to ambient	83.3	$^\circ\text{C/W}$
R_{th-c}		Junction to case	6.25	$^\circ\text{C/W}$

Note. Above parameters are guaranteed independently.


ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{(BR)EBO}$	Emitter to base breakdown voltage	$I_E = 5\text{mA}$, $I_C = 0$	5			V
$V_{(BR)CBO}$	Collector to base breakdown voltage	$I_C = 1\text{mA}$, $I_E = 0$	80			V
$V_{(BR)CEO}$	Collector to emitter breakdown voltage	$I_C = 10\text{mA}$, $R_{BE} = \infty$	40			V
I_{CBO}	Collector cutoff current	$V_{CB} = 30\text{V}$, $I_E = 0$			100	μA
I_{EBO}	Emitter cutoff current	$V_{EB} = 4\text{V}$, $I_C = 0$			100	μA
h_{FE}	DC forward current gain *	$V_{CE} = 10\text{V}$, $I_C = 0.1\text{A}$	10	50	180	—
P_O	Output power	$V_{CC} = 12\text{V}$, $P_{IN} = 0.5\text{W}$, $f = 27\text{MHz}$	14	16		W
η_C	Collector efficiency		60	70		%

Note. * Pulse test, $P_W = 150\mu\text{s}$, duty=5%


Above parameters, ratings, limits and conditions are subject to change.

TEST CIRCUIT

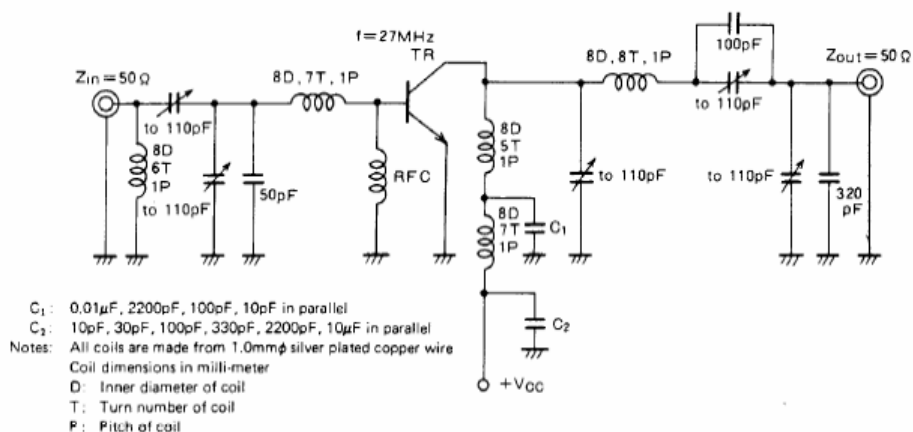


TYPICAL PERFORMANCE DATA


COLLECTOR DISSIPATION VS. AMBIENT TEMPERATURE

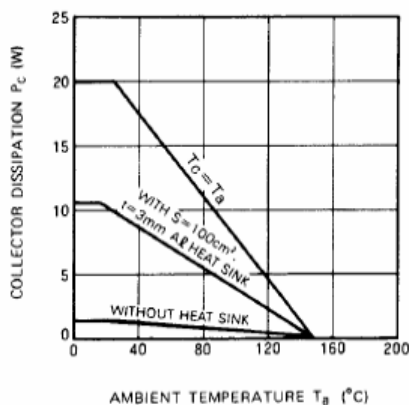


COLLECTOR CURRENT VS.
COLLECTOR TO EMITTER VOLTAGE

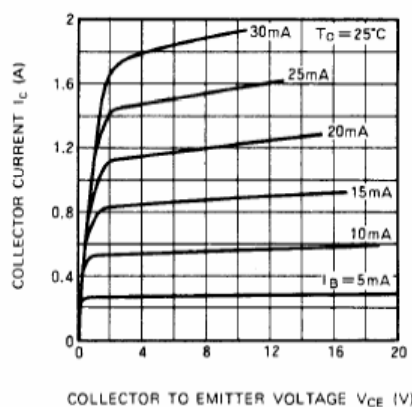


DC CURRENT GAIN VS. COLLECTOR CURRENT

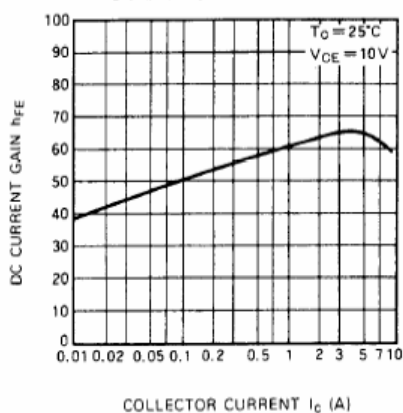


COLLECTOR TO EMITTER BREAKDOWN
VOLTAGE VS.
BASE TO EMITTER RESISTANCE

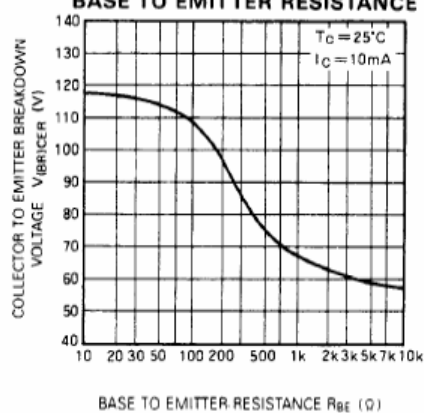


COLLECTOR OUTPUT CAPACITANCE VS.
COLLECTOR TO BASE VOLTAGE

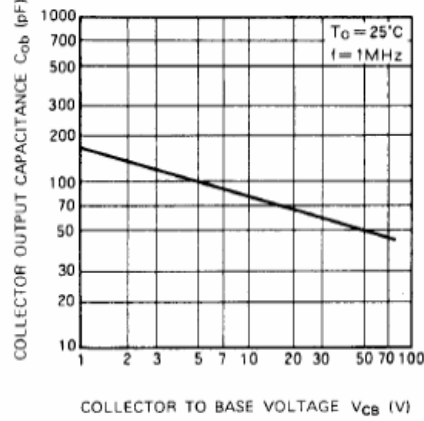

OUTPUT POWER,
COLLECTOR EFFICIENCY
VS. INPUT POWER

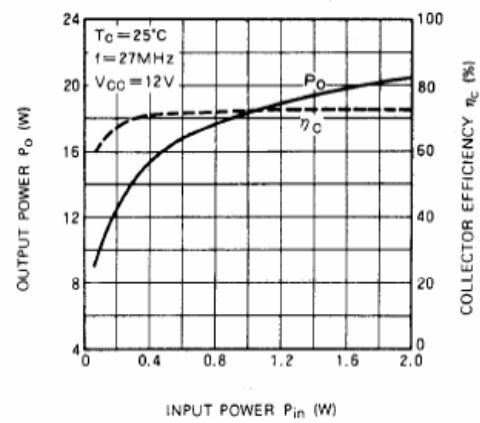

OUTPUT POWER VS. COLLECTOR
SUPPLY VOLTAGE

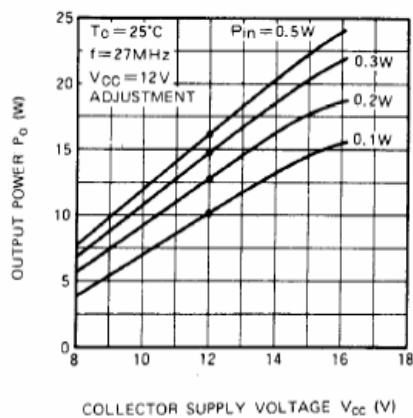



ELEFLOW OFFICES

CHINA ELEFLOW TECHNOLOGIES(HQ) Suite1-603, HuaKang Plaza 109 ZhenXing Road, Futian District ShenZhen518031, P.R. China Phone: 86-755-83204665/83204663 Fax: 86-755-8320 4659 Email: eleflow@163.com USA ELEFLOW TECHNOLOGIES(USA) Mr. Ted Seymore (Manager) 3291 NE 4th Ave., Boca Raton Florida 33431-6011, USA Phone: 408-716-8509 Fax: 561-852-0505 Email: tedseymour@adelphia.net	R & D CENTER ELEFLOW TECHNOLOGIES(R&D CENTER) Overseas Chinese High-Tech Venture Park No. 12 South, Hi-tech Park, NanShan Dist. ShenZhen518057, China CHENGDU, CHINA Eleflow Technologies (Chengdu Office) Mr. Ou, Lin (Manager) Suite A401, Qunyi Business Centre 13 ErHuanLu NanYiDuan, Chengdu Sichuan610041, China Phone: 86-28-8521 3480 Fax: 86-28-8521 3480 Email: eleflow@163.com
---	--



eleflow

All Rights Reserved.
Specifications are subject to changes without notification.
© Copyright 2006 ELEFLOW TECHNOLOGIES
www.eleflow.com