FEATURES

- Industrial Standard DIP-24 Package
- Encapsulated 4W Converter
- Ultra-wide 4:1 Input Range
- Wide Operating Ambient Temp. Range
- Under-voltage, Overload and Short Circuit Protection
- Meets EMI EN 55022 Class A
- I/O-isolation 1500VDC
- 3 Years Product Warranty



c UL us
UL 60950-1

3 YEAR WARRANTY
RoHS Compliant

PRODUCT OVERVIEW

The MIW2000 series is a 4W isolated DC-DC converter family housed in a rugged metal, industrial standard DIP-24 package, ideal for space-constrained industrial and embedded applications. It features an ultra-wide 4:1 input range and a wide operating ambient temperature range, ensuring stable performance under varying supply and environmental conditions.

With 1500 VDC I/O isolation, built-in under-voltage, overload and short circuit protection, EN 55022 Class A compliant EMI performance, and a 3-year product warranty, the MIW2000 series offers a reliable and robust power solution for demanding system designs.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Max. capacitive Load	Efficiency (typ.)
			Max.	Min.	@Max. Load	@No Load			@Max. Load
	VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	mA(typ.)	µF	%
MIW2021	24 (9 ~ 36)	3.3	900	90	161	20	5	3000	77
MIW2022		5	660	66	170				81
MIW2023		12	333	33	201				83
MIW2024		15	267	27	201				83
MIW2025		±5	±300	±30	156			680#	80
MIW2026		±12	±167	±17	201				83
MIW2027		±15	±133	±13	201				83
MIW2031	48 (18 ~ 75)	3.3	900	90	79	10	5	3000	78
MIW2032		5	660	66	84				82
MIW2033		12	333	33	98				85
MIW2034		15	267	27	98				85
MIW2035		±5	±300	±30	76			680#	82
MIW2036		±12	±167	±17	98				85
MIW2037		±15	±133	±13	98				85

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Voltage	24V Input Models	4.5	6	8.5	
	48V Input Models	8.5	12	17	
Under Voltage Shutdown	24V Input Models	---	---	8	
	48V Input Models	---	---	16	
Short Circuit Input Power	All Models	---	1000	2000	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55022, class A			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±0.5	±1.0	%
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.2	±0.5	%
Load Regulation	Io=10% to 100%	---	±0.3	±1.0	%
Ripple & Noise(3) (20MHz)		---	50	75	mV P-P
Ripple & Noise(3) (20MHz)	Over Line, Load & Temp.	---	---	100	mV P-P
Ripple & Noise(3) (20MHz)		---	---	15	mV rms
Transient Recovery Time	25% Load Step Change(2)	---	150	500	μs
Transient Response Deviation		---	±2	---	%
Temperature Coefficient		---	±0.01	±0.02	%/℃
Over Load Protection	Foldback	120	---	---	%
Short Circuit Protection	Continuous				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	380	500	pF
Switching Frequency		---	350	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25℃, Ground Benign	1,000,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate)				

Input Fuse

24V Input Models	48V Input Models
1000mA Slow-Blow Type	500mA Slow-Blow Type

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature Range (with Derating)	Ambient	-40	+85	℃
Case Temperature		---	+100	℃
Storage Temperature Range		-50	+125	℃
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	℃

Power Derating Curve

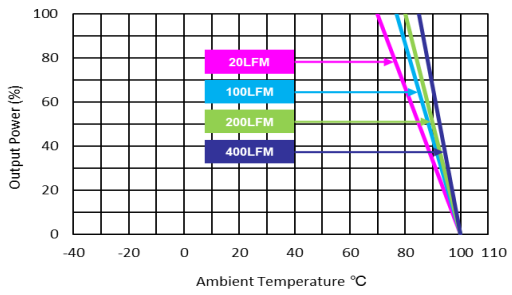

Notes

1 Specifications typical at Ta=+25℃, resistive load, nominal input voltage and rated output current unless otherwise noted.
2 Transient recovery time is measured to within 1% error band for a step change in output load of 50% to 100%.
3 Ripple & Noise measurement bandwidth is 0-20MHz.
4 Please do not operate the product without a minimum load condition.
5 All DC-DC converters should be externally fused at the front end for protection.
6 Other input and output voltage may be available, please contact MINMAX.
7 Specifications subject to change without notice.
8 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications

Mechanical Dimensions

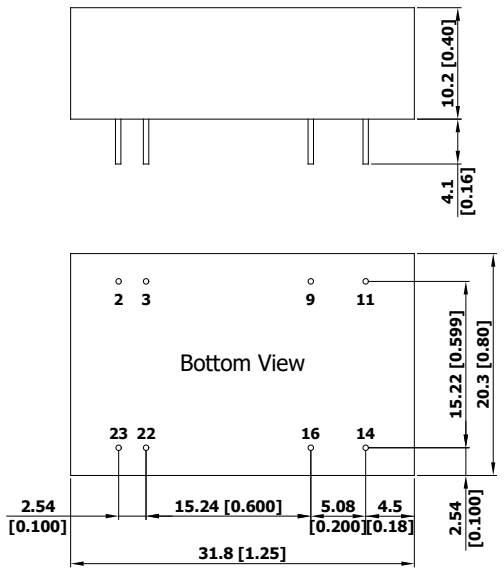

Pin Connections

Pin	Single Output	Dual Output	Diameter mm (inches)
2	-Vin	-Vin	Ø 0.5 [0.02]
3	-Vin	-Vin	Ø 0.5 [0.02]
9	No Pin	Common	Ø 0.5 [0.02]
11	NC	-Vout	Ø 0.5 [0.02]
14	+Vout	+Vout	Ø 0.5 [0.02]
16	-Vout	Common	Ø 0.5 [0.02]
22	+Vin	+Vin	Ø 0.5 [0.02]
23	+Vin	+Vin	Ø 0.5 [0.02]

NC: No Connection

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
  X.XX±0.25 (X.XXX±0.010)
- Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

Physical Characteristics

Case Size	:	31.8x20.3x10.2mm (1.25x0.80x0.40 Inches)
Case Material	:	Metal With Non-Conductive Baseplate
Pin Material	:	Phosphor Bronze
Weight	:	16.2g

Test Setup

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with a inductor Lin (4.7μH) and Cin (220μF, ESR < 1.0Ω at 100 kHz) to simulate source impedance.
Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

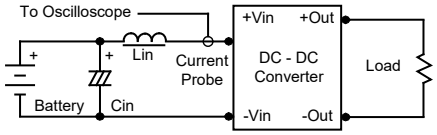

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.47μF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

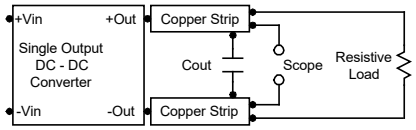

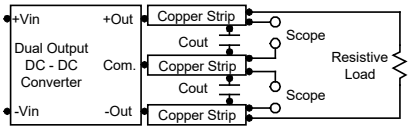

Technical Notes

Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.
In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.
Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 4.7μF for the 24V input devices and a 2.2μF for the 48V devices.

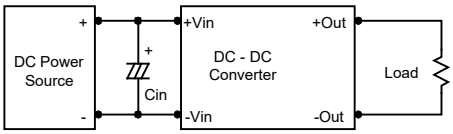

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3μF capacitors at the output.

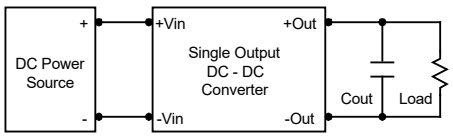

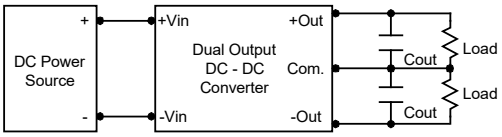

Maximum Capacitive Load

The MIW2000 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 680μF maximum capacitive load for dual outputs and 3000μF capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100°C.
The derating curves are determined from measurements obtained in a test setup.

