

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTBLDT701G6CS_

SPEC. NO.: LM701-6B-~~2~~

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
NO.336, NANKAN RD., SEC. 1, LUCHU
VILLAGE, TAOYUAN COUNTY, TAIWAN
TEL:886-3-3223751 EXT. 2715~2718
FAX:886-3-3125803
E-mail:lcdsales@npc.com.tw

EDITED ON : May.19.2007


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN

[illegible]

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTBLDT701G6CS_	—
2	Module Size	205.5 (W) x 141.0 (H) x 7.0 max (D)	mm
3	Dot Size	0.21 (W) x 0.21 (H)	mm
4	Dot Pitch	0.23 (W) x 0.23 (H)	mm
5	Number of Dots	640 (W) x 480 (H)	Dot
6	Duty	1/240	—
7	LCD Display Mode	FSTN, Normally Black / Negative Image	—
8	Rear Polarizer	Transmissive Type	—
9	Viewing Direction	6	O'clock
10	Backlight	CCFL	—
11	Controller	Excluded	—
12	DC/DC Converter	Excluded	—
13	Touch Panel	Excluded	—
14	Weight	310 (Approx.)	g

Note :

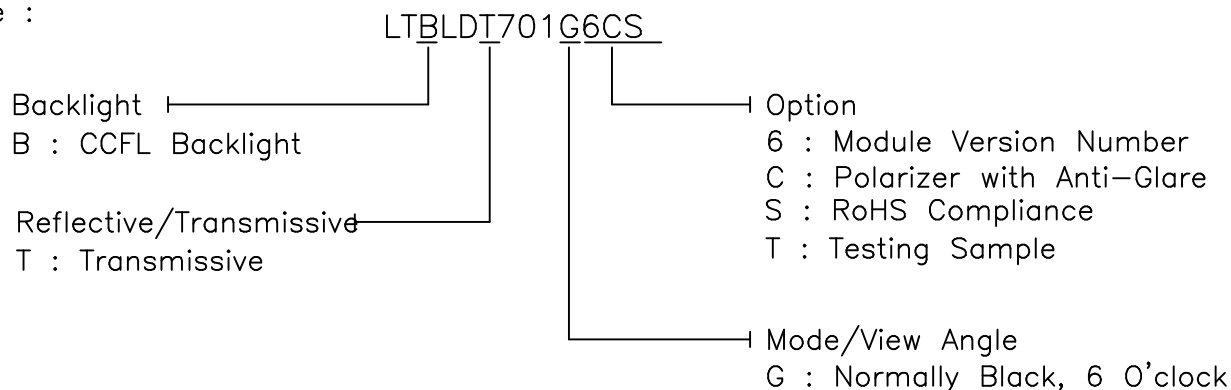

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0 V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	6.5	V	
Input Voltage	VEE-VSS	0	27	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 50^{\circ}\text{C}$: 80%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.
That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS OF LCD

ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic		VDD-VSS	-		3.0	3.3	3.6	V
					4.75	5.0	5.25	
Input Voltage		VIL	L level		VSS	0.2VDD	-	V
		VIH	H level		0.8VDD	VDD	-	V
LCM Recommend LCD Module Driving Voltage		VEE-VSS	VDD=5.0V	0°C	22.9	23.3	23.7	V
				25°C	21.9	22.3	22.7	
				50°C	21.0	21.4	21.8	
Power Supply Current for LCM		IDD	VDD=5.0V VEE-VSS=22.3V FLM=70Hz PATTERN : ■ □ ■ □ □ ■ □ ■		-	3.0	6.0	mA
		IEE			-	15	30	
LCM	Surface Luminance	Ls	Vin=10.1V IL =5mA	PATTERN: (Dots All On)	70.0	85.5	-	cd/m ²
				PATTERN: (Dots All Off)	-	13.3	20.0	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used Lamp Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp Voltage	V_L	—	295	—	Vrms	—
Lamp current	I_L	4	5	6	mA rms	—
Lamp power consumption	P_L	—	1.48	—	W	(*1)
Starting voltage	V_S	—	—	430	Vrms	Ta=25°C
		—	—	500	Vrms	Ta=0°C
Lamp life time	L_L	—	20000	—	hrs	at $I_L = 5 \text{ mA rms}$ Ta=25°C (*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .

3-3.ELECTRICAL CHARACTERISTICS OF RECOMMENDED INVERTER TDK CXA-L10L

3-3-1 GENERAL SPECIFICATIONS

OPERATION TEMPERATURE : -10°C~60°C

STORAGE TEMPERATURE : -20°C~85°C

DIMENSION : 44.0(L)mm x 21.0(W)mm x MAX 18.0(H)mm

3-3-2 PIN ASSIGNMENTS

INPUT (CN1) CONNECTOR :

OUTPUT (CN2) CONNECTOR :

NO.	FUNCTION
1	VIN
2	GND

NO.	FUNCTION
3	OUT1
4	OUT2
5	OUT GND

3-3-3 RELATIONSHIP BETWEEN VIN & TUBE CURRENT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Input Voltage	VIN	-	10.1	-	V	
Tube Current	IL	-	5	-	mA	

4.OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE	Cr(Contrast Ratio)							θ (Viewing Angle)		ϕ (Viewing Angle)	
	0°C		25°C		50°C			25°C		25°C	
	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.		MIN.	TYP.	MIN.	TYP.
T	G	5.5	8.0	7.0	10.0	2.8	4.0	—	*F:50 R:26	—	*L:45 R:45
NOTE		NOTE 6						NOTE 5			

* Under Cr > 2 Condition

NOTE :

T: TRANSMISSIVE


G: NORMALLY BLACK, 6 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	440	550	820	ms	NOTE 2
		25℃	180	234	350		
		50℃	90	110	165		
Response Time (fall)	Tr	0℃	200	250	375	ms	NOTE 2
		25℃	90	110	165		
		50℃	75	95	140		

(NOTE 1)

Definition of Operation Voltage(Vop)

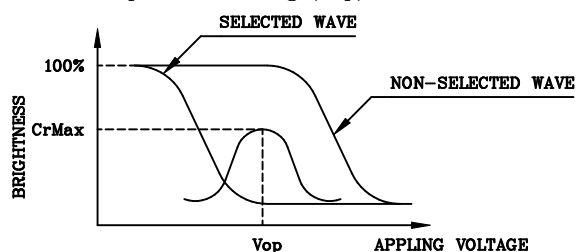

(positive type)

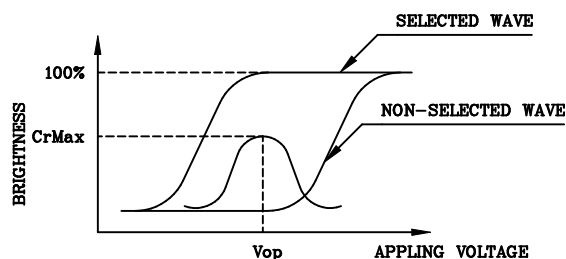

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

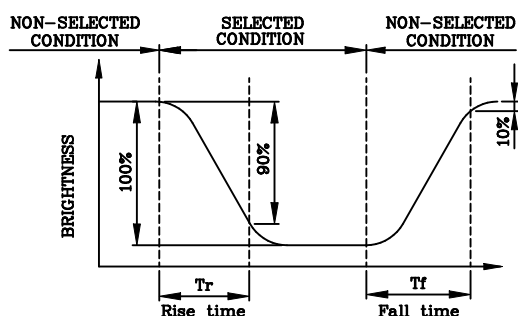

(positive type)

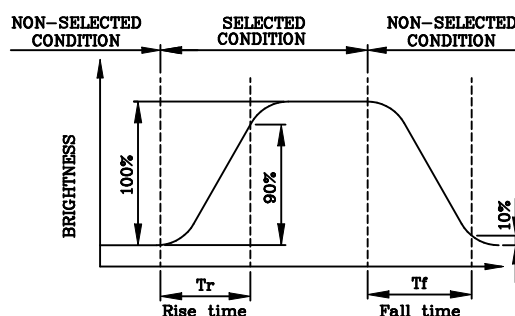

(negative type)

*Conditions

Operating Voltage : Vop


Viewing Angle (θ,φ) : (0,0)

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

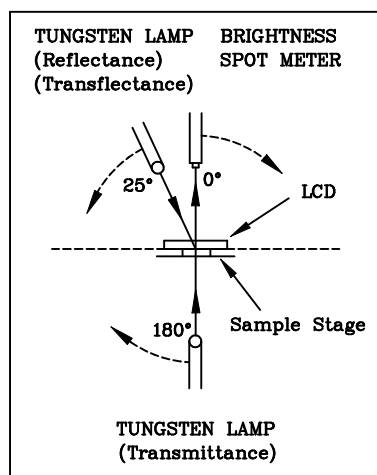


CONST.
TEMP.
CHAMBER

Multiplex Driving (1/N duty 1/a bias)

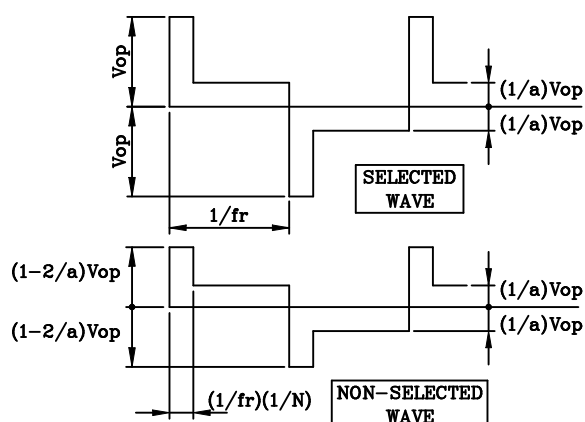



(NOTE 4)

Definition of Viewing Direction

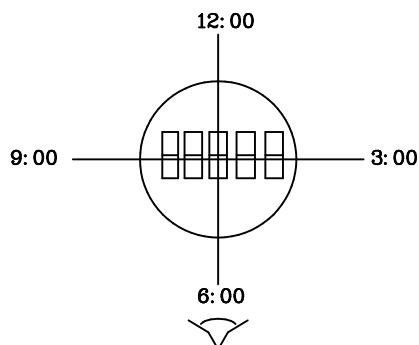

(NOTE 5)

Definition of Viewing Angle

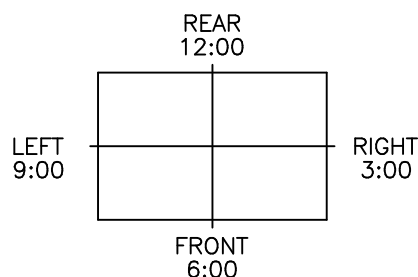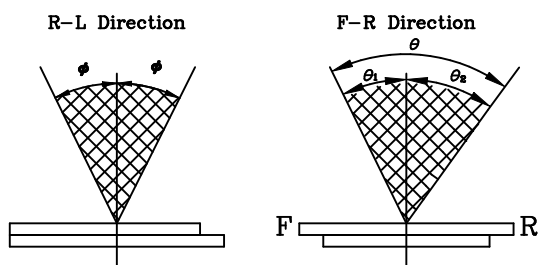

*For This Product
The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

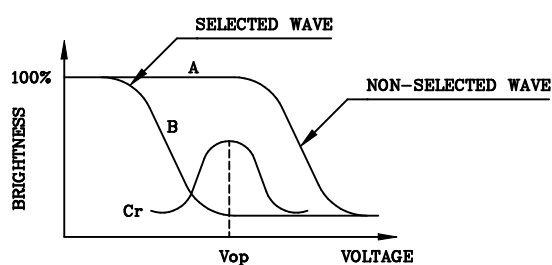

(positive type)

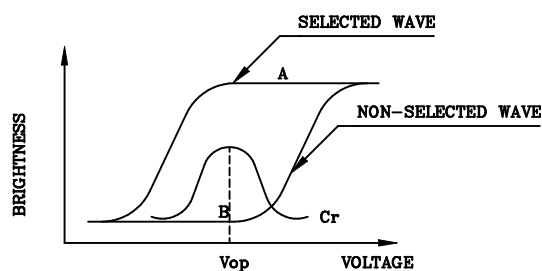


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

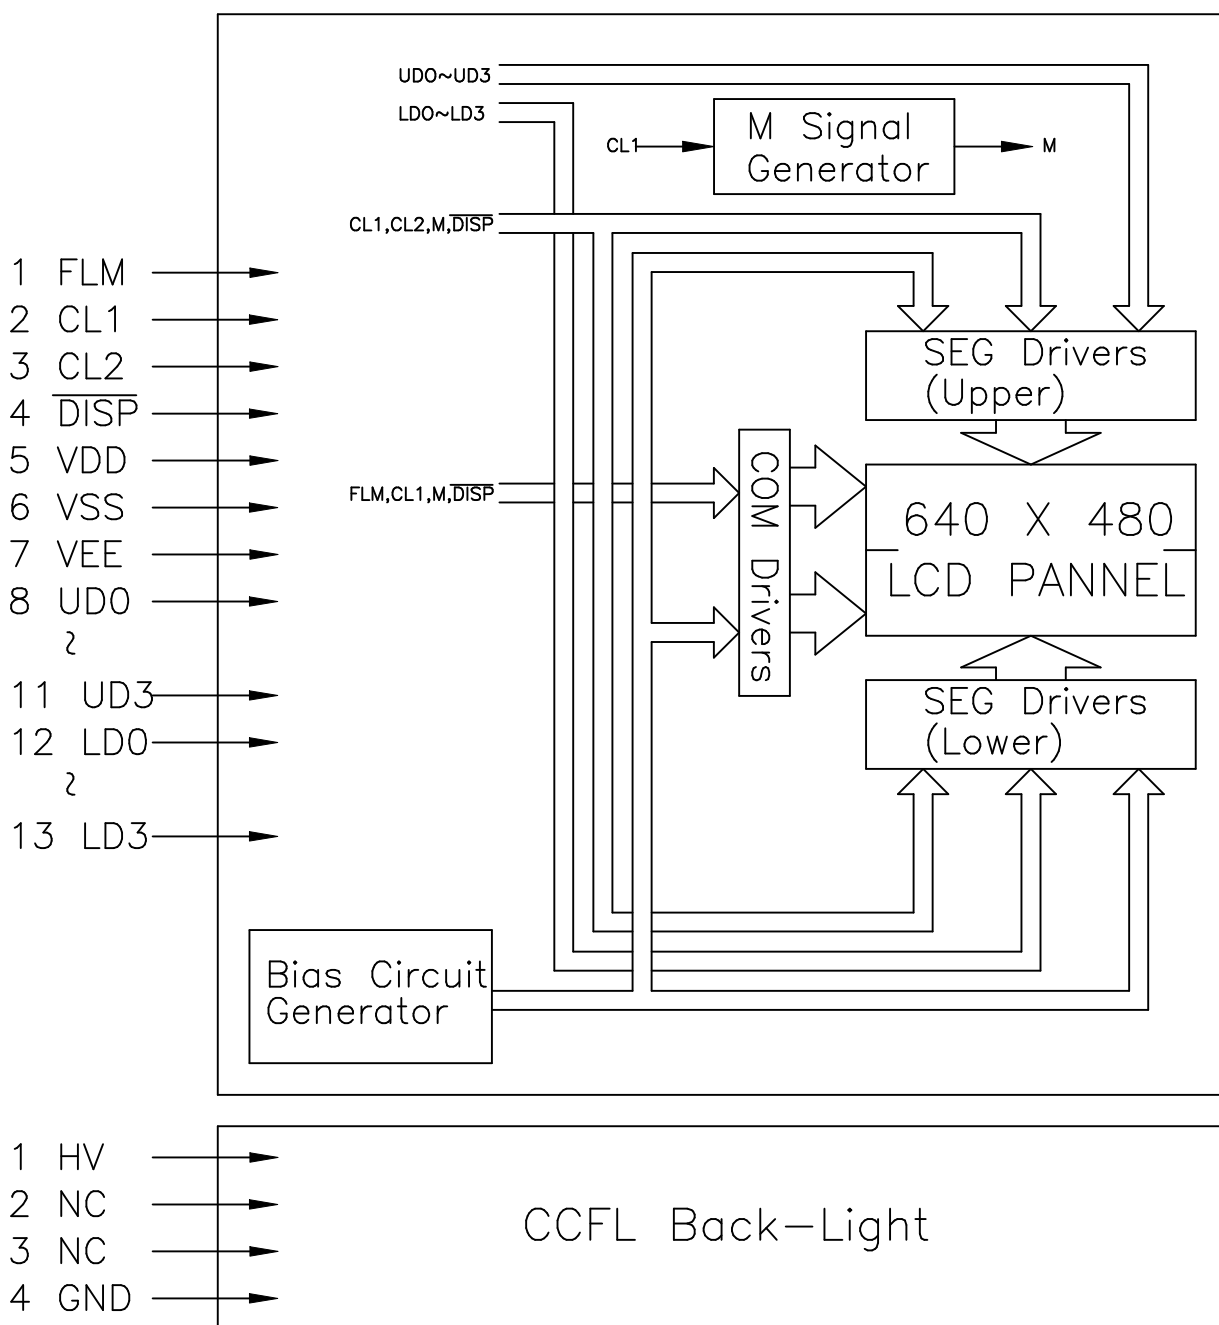

6.INTERNAL PIN CONNECTION

LCD

Pin No.	Symbol	Level	Function
1	FLM	H/L	SCAN START-UP SIGNAL
2	CL1	H→L	DATA LATCH PULSE
3	CL2	H→L	DATA SHIFT PULSE
4	$\overline{\text{DISP}}$	H/L	DISPLAY OFF ("H"=ON,"L"=OFF)
5	VDD	—	POWER SUPPLY FOR LOGIC (+3.3V/+5V)
6	VSS	—	SIGNAL GROUND (GND)
7	VEE	—	POWER SUPPLY FOR LCD (+V)
8	UD0	H/L	DISPLAY DATA (UPPER HALF)
9	UD1		
10	UD2		
11	UD3		
12	LD0	H/L	DISPLAY DATA (LOWER HALF)
13	LD1		
14	LD2		
15	LD3		

CCFL

Pin No.	Symbol	Level	Function
1	HV	—	HIGH VOLTAGE LINE (INVERTER)
2~3	NC	—	NON CONNECTION
4	GND	—	GROUND LINE (INVERTER)

LCD

Used connector : MOLEX 53261-1571


Mating connector : MOLEX 51021-1500(HOUSING) X 1 +
MOLEX 50058-8000(TERMINAL) X 15 or Compatible

CCFL

Used connector : M63M83-04 (MITSUMI) or compatible

Mating connector : M60-04-30-114P (MITSUMI)
M60-04-30-134P (MITSUMI)
M61M73-04 (MITSUMI)

7. POWER SUPPLY

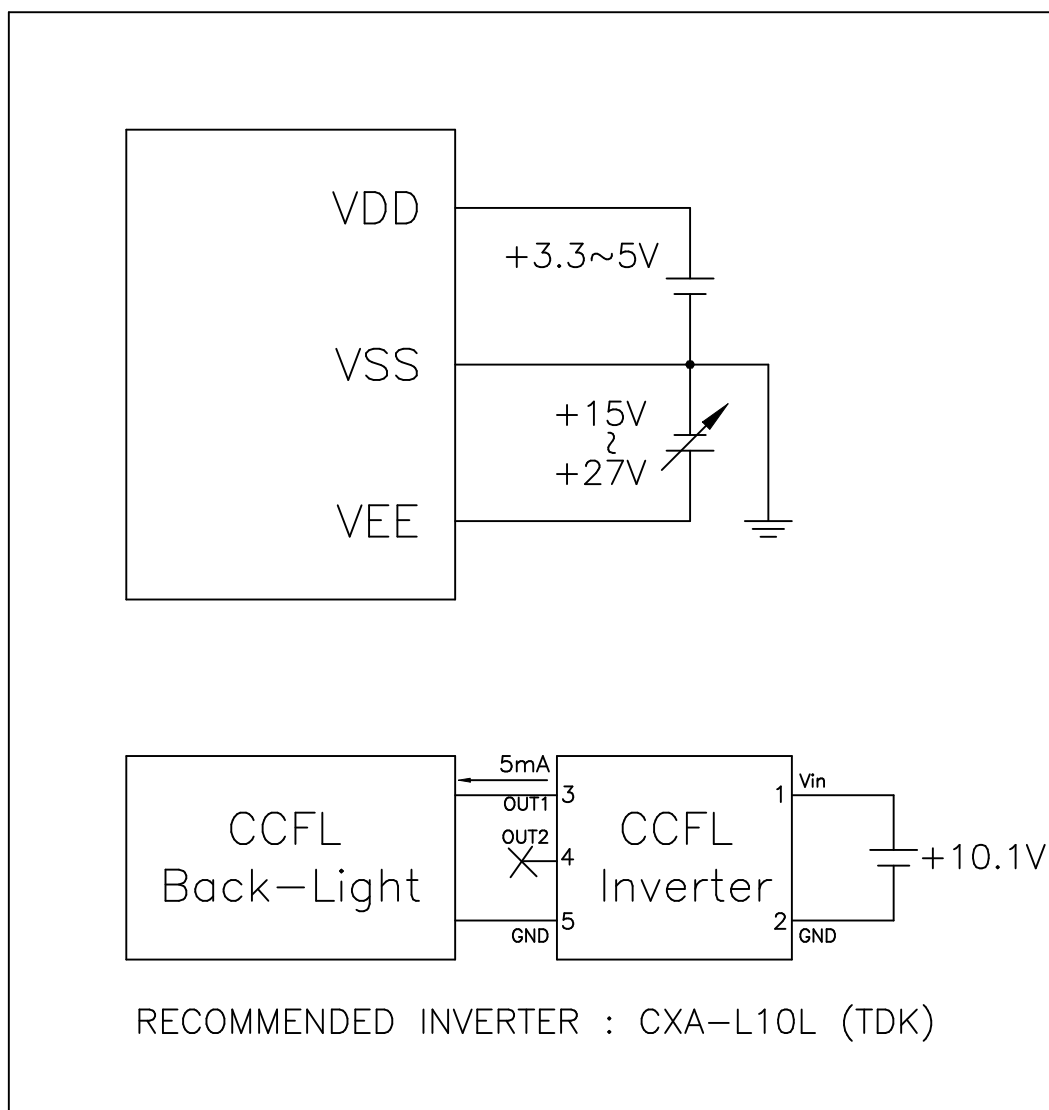


8. TIMING CHARACTERISTICS


8-1. INTERFACE TIMING

@VDD=2.5~5.5V

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Shift Clock Period	t_{cp}	152	—	—	ns
"CL2" PULSE WIDTH	t_w	65	—	—	ns
CLOCK RISE, FALL TIME	t_r, t_f	—	—	50	ns
DATA SETUP TIME	t_{dsu}	50	—	—	ns
DATA HOLD TIME	t_{dhd}	40	—	—	ns
"CL2" → "CL1" FALL TIME	t_{lsu}	65	—	—	ns
"CL1" → "CL2" FALL TIME	t_{lc}	65	—	—	ns
"FLM" SETUP TIME	t_{setup}	100	—	—	ns
"FLM" HOLD TIME	t_{hold}	100	—	—	ns
"CL1" PULSE WIDTH	t_{wc}	65	—	—	ns

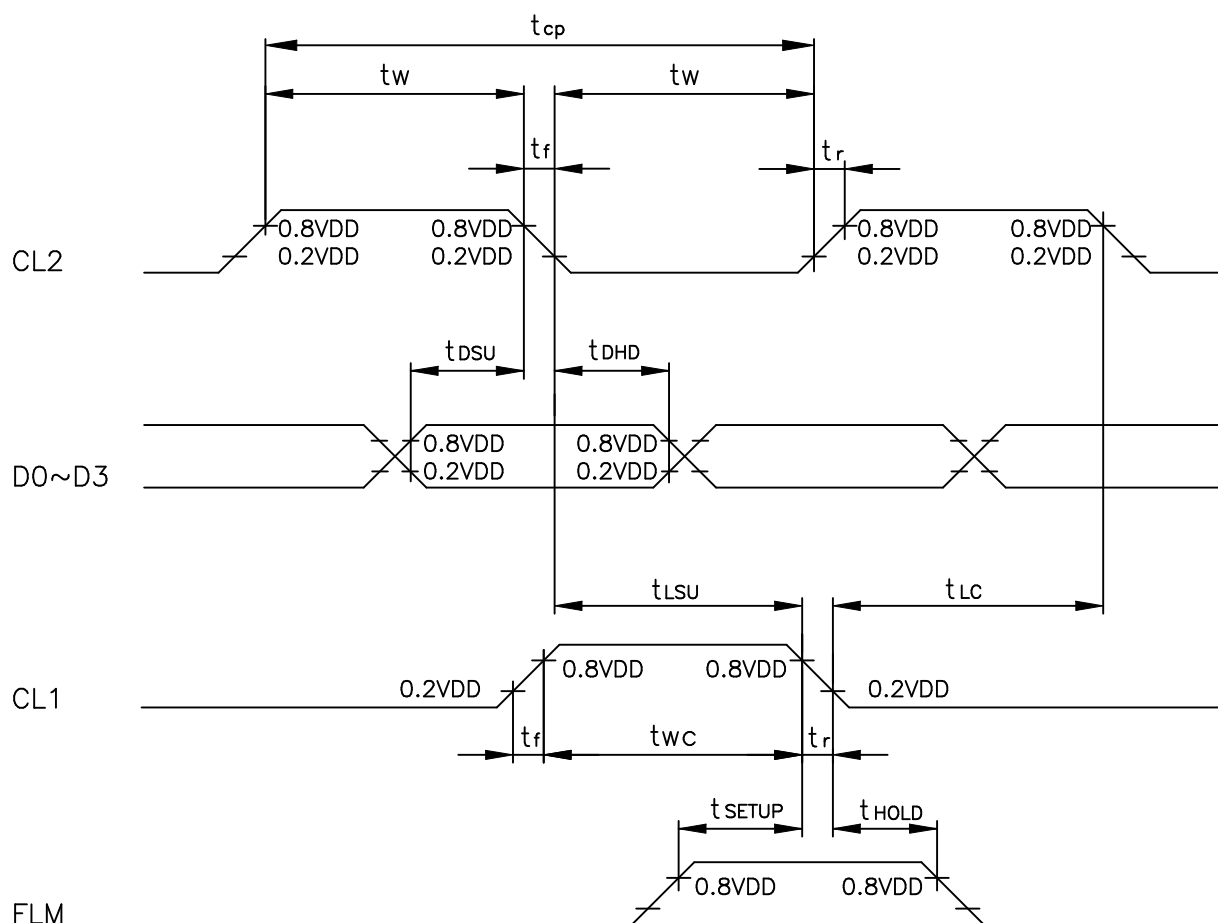


8-2.POWER ON/OFF TIMING

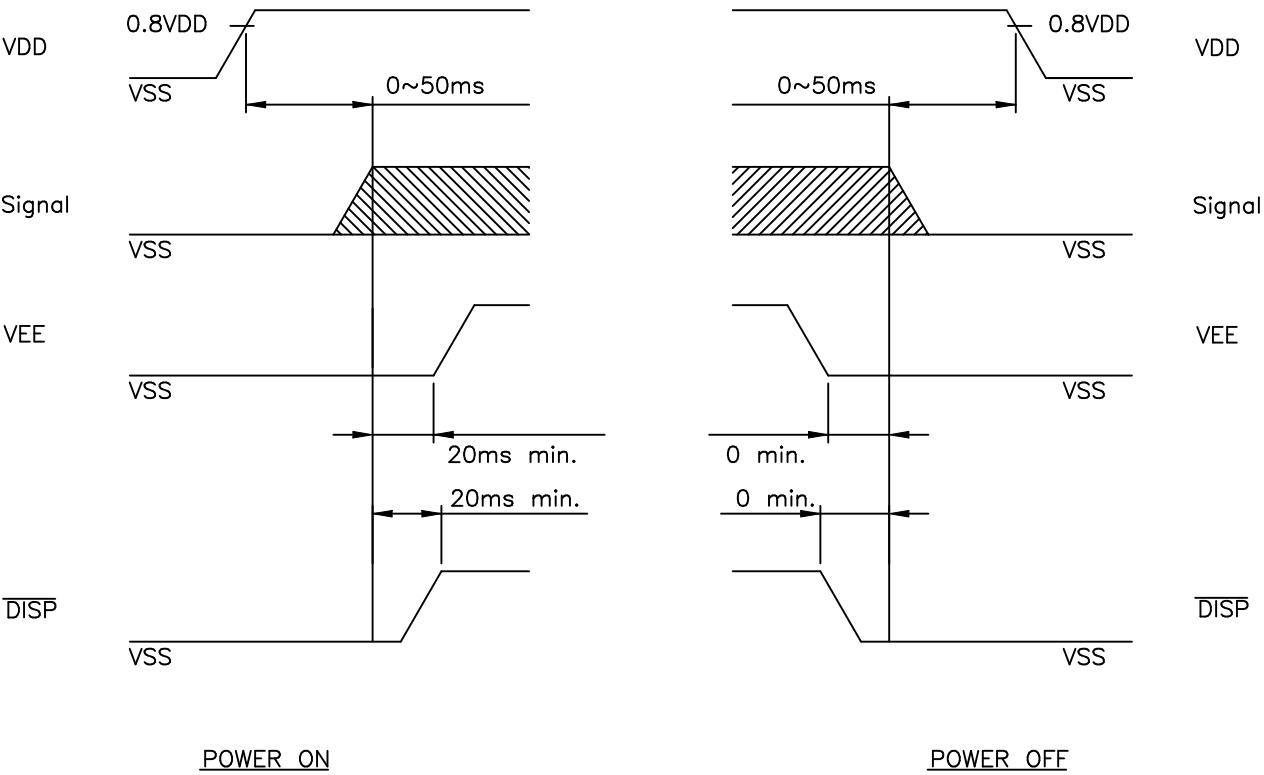


The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

8-3.DISPLAY PATTERN

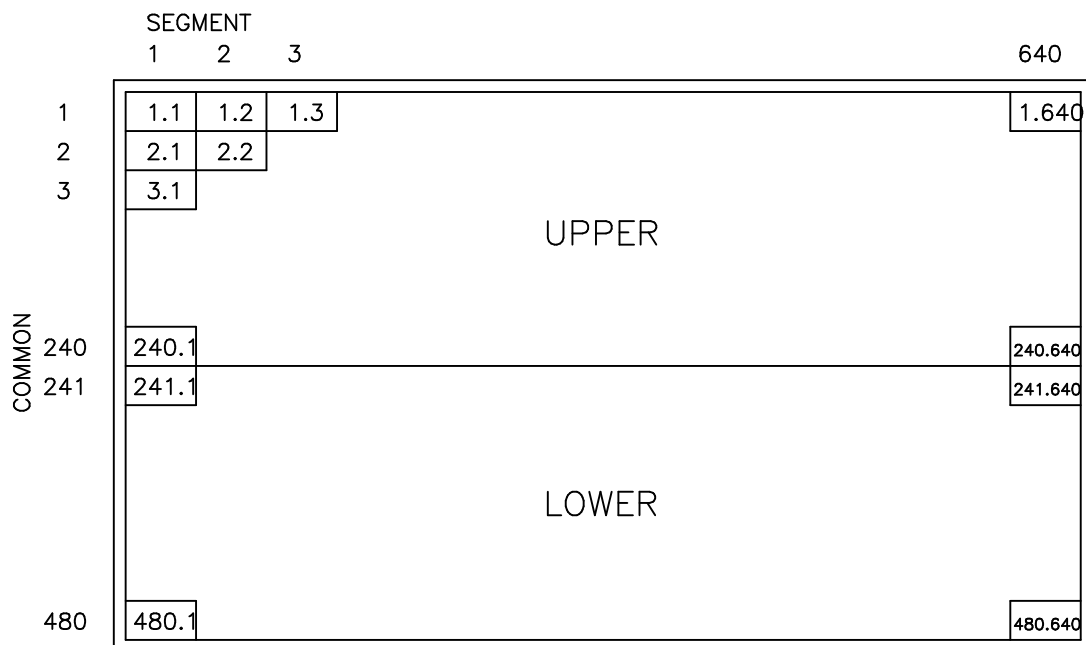

NOTE : 1.1 MEANS 1ST COMMON 1ST SEGMENT DOT

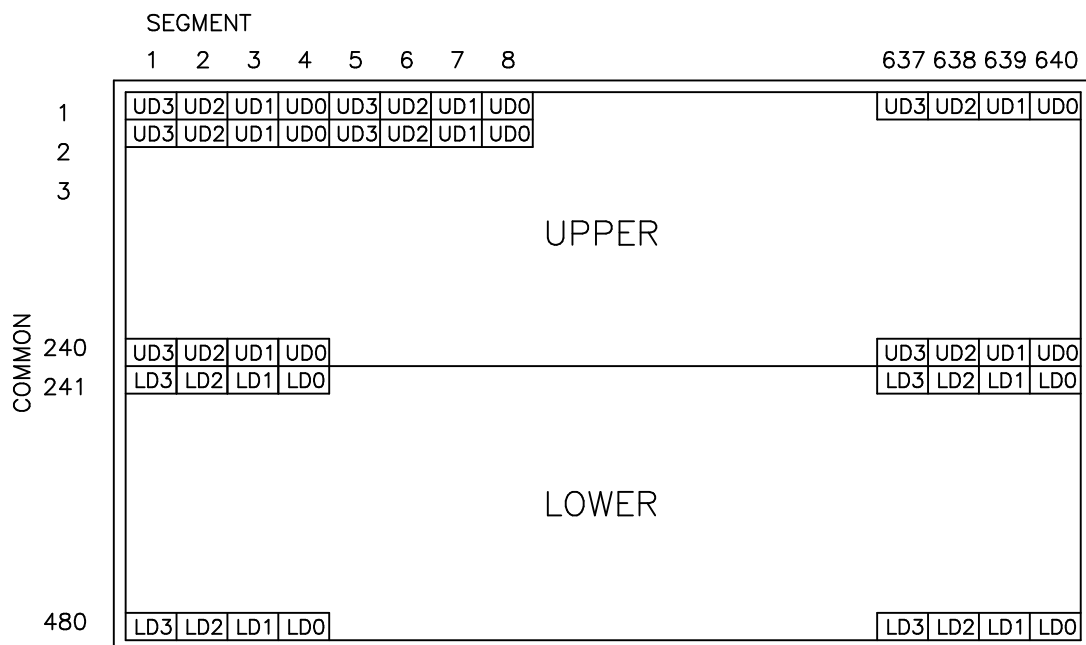

9. RELIABILITY TEST

NORMAL TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min ↑—————↓ (1cycle)			Appearance without defect	10 cycles

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM701-6B DATE : DEC. 22, 2005 SHEET NO. : 15/23
---	---------------	---

Inspection Provision

1.Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2.Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3.Technical Terms

3-1 NAN YA Technical Terms

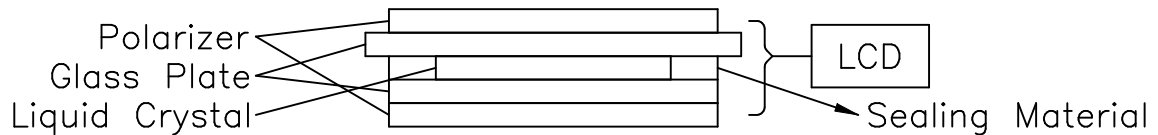

4.Outgoing Inspection Provision

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection

4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------


NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM701-6B DATE : DEC. 22, 2005 SHEET NO. : 16/23
---	---------------	---

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

*Viewing Area Definition

Fig. 1

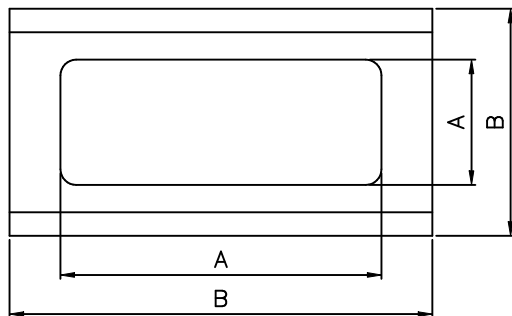

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.

The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM701-6B DATE : DEC. 22, 2005 SHEET NO. : 17/23
---	---------------	---

*Test and measurement are performed under the following conditions, unless otherwise specified.

Otherwise specfied.

Temperature $20 \pm 15^{\circ}\text{C}$
Humidity $65 \pm 20\%\text{R.H.}$
Pressure $860 \sim 1060\text{hPa}(\text{mmbar})$

In case of doubtful judgment, it is performed under the following conditions.

Temperature $20 \pm 15^{\circ}\text{C}$
Humidity $65 \pm 20\%\text{R.H.}$
Pressure $860 \sim 1060\text{hPa}(\text{mmbar})$

5.Specification for quality check

5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Fail
5.	Response time	Within Specified value
6.	Backlight turn on /off	Within Specified value

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------

5-2 External Appearance Defect

NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	(1)–1–Spots <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D\leq 0.1$</td><td>Ignore</td></tr><tr><td>$0.1 < D\leq 0.2$</td><td>5</td></tr><tr><td>$0.2 < D\leq 0.3$</td><td>2</td></tr><tr><td>$0.3 < D$</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2 (1)–2–Blurred Spots(At lighting condition) <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D\leq 0.3$</td><td>Ignore</td></tr><tr><td>$0.3 < D\leq 0.75$</td><td>5</td></tr><tr><td>$0.75 < D$</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2	Average Diameter(mm):D	Number of pieces permitted	$D\leq 0.1$	Ignore	$0.1 < D\leq 0.2$	5	$0.2 < D\leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D\leq 0.3$	Ignore	$0.3 < D\leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D\leq 0.1$	Ignore																			
$0.1 < D\leq 0.2$	5																			
$0.2 < D\leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D\leq 0.3$	Ignore																			
$0.3 < D\leq 0.75$	5																			
$0.75 < D$	0																			

SPECIFICATION

1.	Line	(1)-1 Lines(At non lighting condition) <table> <tr> <th>Width(mm):W</th><th>Length(mm):L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 4$</td><td>2</td></tr> <tr> <td>$0.08 < W \leq 0.1$</td><td>$L \leq 1$</td><td>1</td></tr> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated. (1)-2 Lins(At lighting condition) <table> <tr> <th>Width(mm):W</th><th>Length(mm):L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 3$</td><td>6</td></tr> <tr> <td>$0.08 < W$</td><td>$3 < L$</td><td>None</td></tr> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.	Width(mm):W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm):W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm):W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm):W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2.	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3.	Color irregular	Not remarkable color irregular.																								




SPECIFICATION

4.	Air bubbles polarizing plates, and reflection plates	<table><tr><th>Average Diameter (mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D \leq 0.3$ $0.3 < D$</td><td>Ignore 0</td></tr></table> Average diameter = (Long diameter + Short diameter)/2 Note that when there are 4 pieces or more, they are not to be concentrated.	Average Diameter (mm):D	Number of pieces permitted	$D \leq 0.3$ $0.3 < D$	Ignore 0						
Average Diameter (mm):D	Number of pieces permitted											
$D \leq 0.3$ $0.3 < D$	Ignore 0											
5.	Cracks	<table><tr><td>(1)General crack</td><td>$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(2)Corner crack</td><td>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</td></tr><tr><td>(3)Seal portion crack</td><td>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(4)ITO Pin crack</td><td>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</td></tr><tr><td>(5)Progressive cracks</td><td>All taken to be unacceptable.</td></tr></table>	(1)General crack	$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.	(2)Corner crack	$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$	(3)Seal portion crack	$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.	(4)ITO Pin crack	$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$	(5)Progressive cracks	All taken to be unacceptable.
(1)General crack	$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.											
(2)Corner crack	$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$											
(3)Seal portion crack	$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.											
(4)ITO Pin crack	$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$											
(5)Progressive cracks	All taken to be unacceptable.											


NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM701-6B DATE : DEC. 22, 2005 SHEET NO. : 21/23
---	---------------	---

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

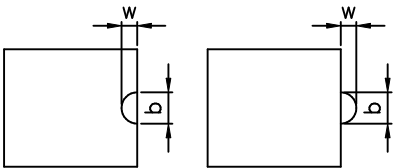NO.	Item	Criteria
1.	Pinhole	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.
2.	Missing	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.
3.	Thick and thin display	 Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------

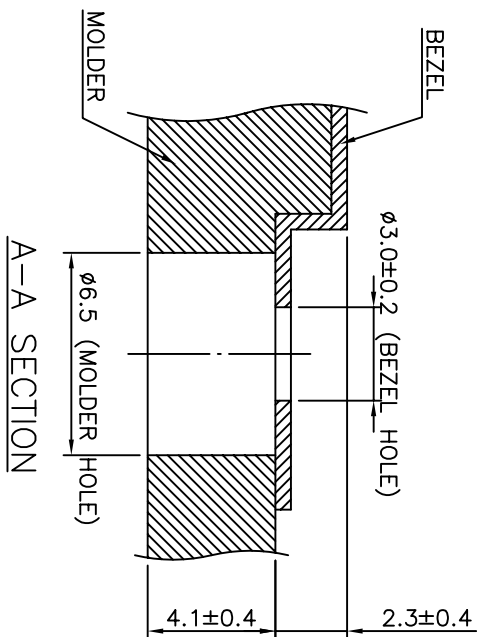


NOTE:

- 1.Resolution: 640X480 DOTS
- 2.Backlight: CCFT
- 3.Frame Material: SECC (0.5mmt)
- 4.LCD Connector: 53261-1571 (MOLEX)
- 5.CCFT Connector: M63M83-04 (MITSUMI) or compatible correspondable CCFT connector : M60-04-30-114P (MITSUMI) M60-04-30-134P (MITSUMI) M61M73-04 (MITSUMI)
- 6.Tolerance No Specified: ±0.5mm

CN1. LCD Connector		
Pin No.	Symbol	Signal Level Function
1	FLM	H Scan Start-up Signal
2	CL1	H+L Data Latch Pulse
3	CL2	H+L Data Shift Pulse
4	DISP	H/L Display Off ("H"=ON,"L"=OFF)
5	VDD	- Power Supply for Logic (+5V)
6	VSS	- Signal Ground (GND)
7	VEE	- Power Supply for LCD (+V)
8	UD0	H/L H/L
9	UD1	H/L H/L
10	UD2	H/L H/L
11	UD3	H/L H/L
12	LD0	H/L H/L
13	LD1	H/L H/L
14	LD2	H/L H/L
15	LD3	H/L H/L
Display Data (Upper Half)		
Display Data (Lower Half)		

CN2. CCFT Connector		
Pin No.	Symbol	Signal Level Function
1	HV	- High Voltage Line (Inverter)
2~3	NC	- Non Connection
4	GND	- Ground Line (Inverter)

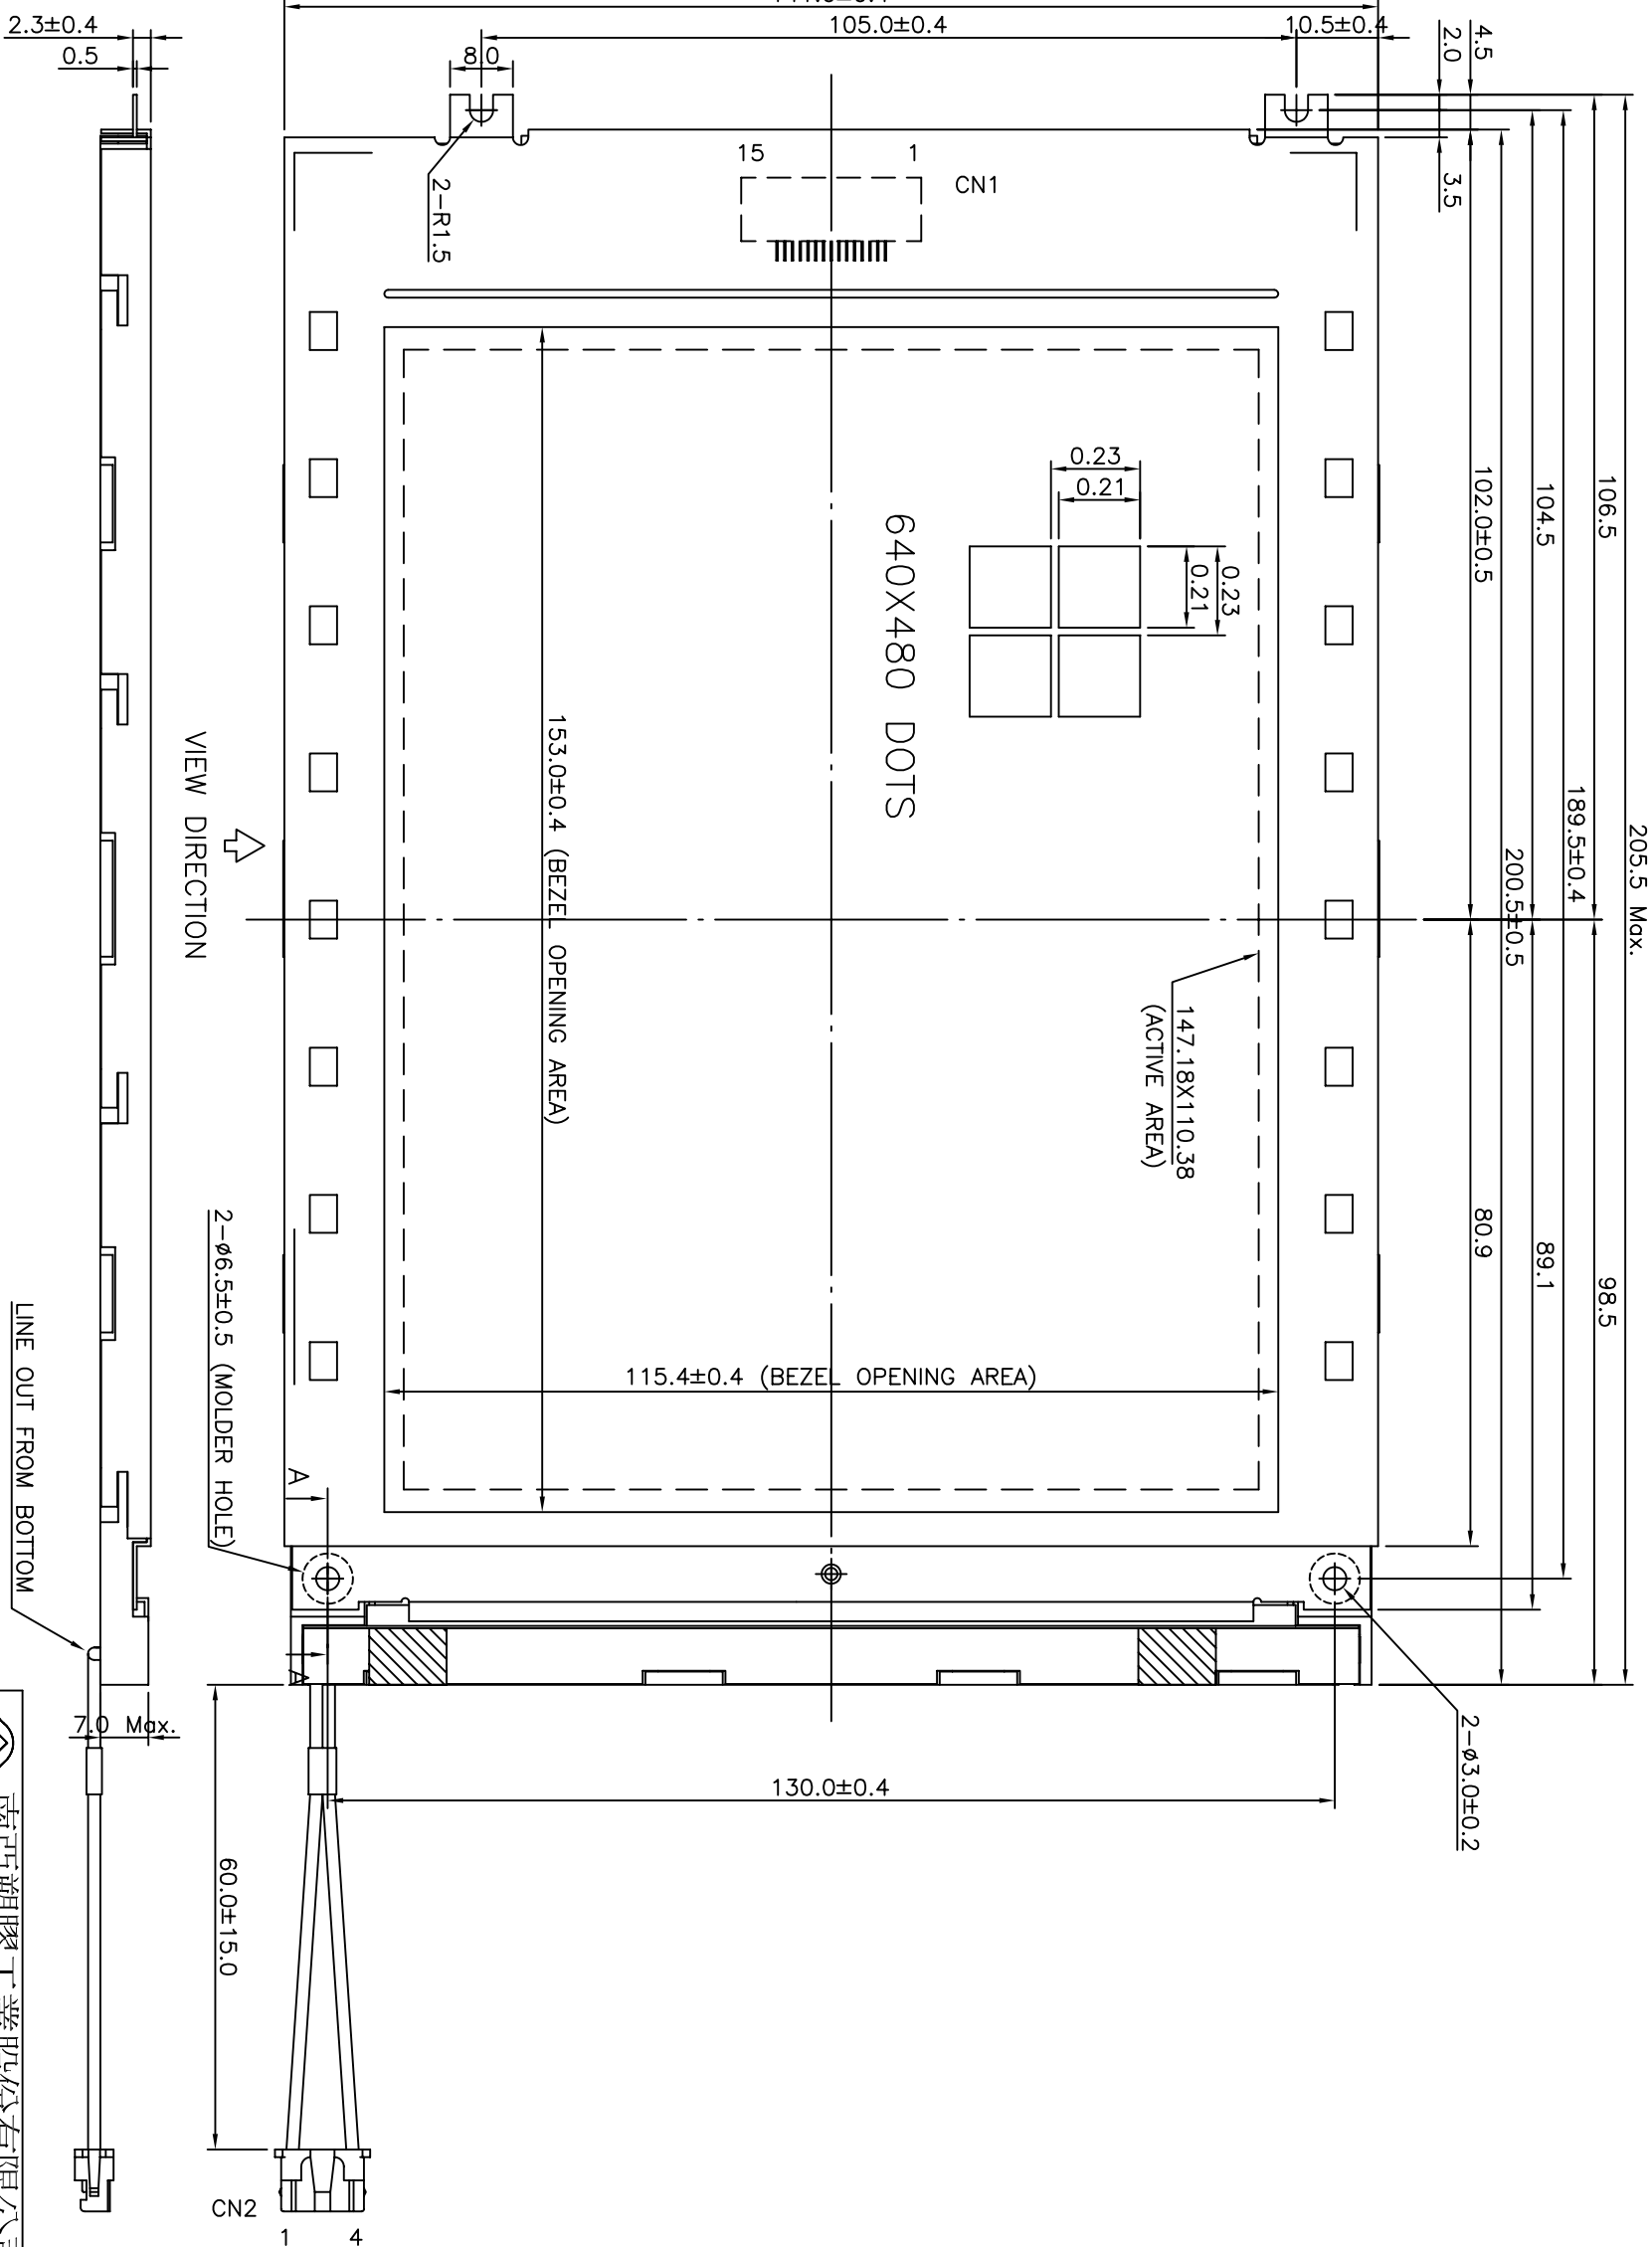

5						APPROVE	TONY CHOU	94.11.15							
4						CHECK	Y. C. Liu	94.11.15							
3						DESIGN	Campos Chen	94.11.15							
2						DRAWN	Campos Chen	94.11.15							
1	Modified	97.05.14	Campos	Y. C. Liu	TONY CHOU										
REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE	DWG NO.									
						M	7	0	1	B	D	6	A		
														1	1
														mm	

LTBLDT701G6CS

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION



製品圖

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

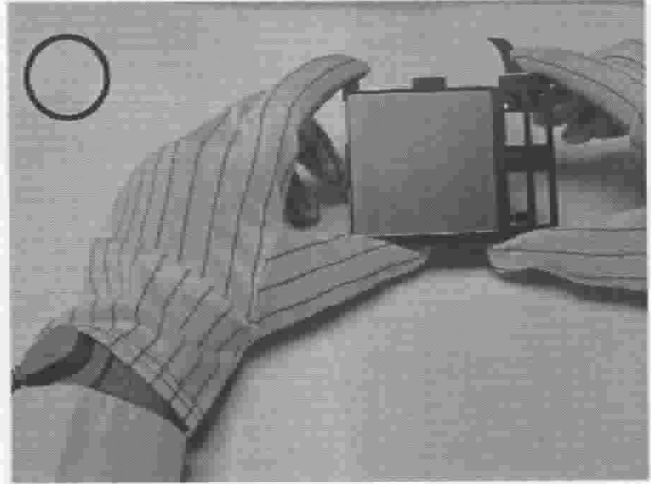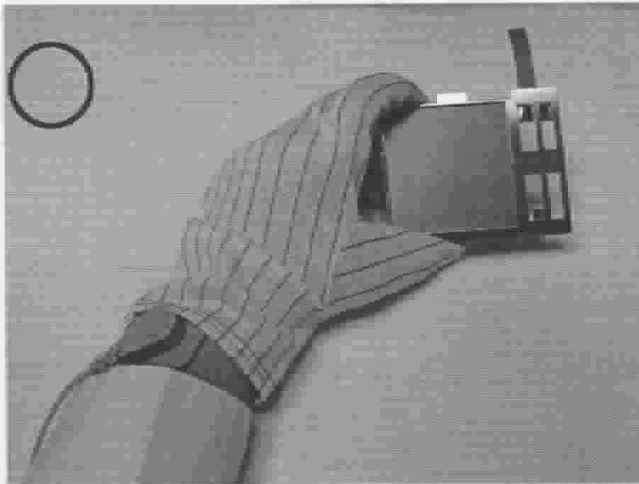


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

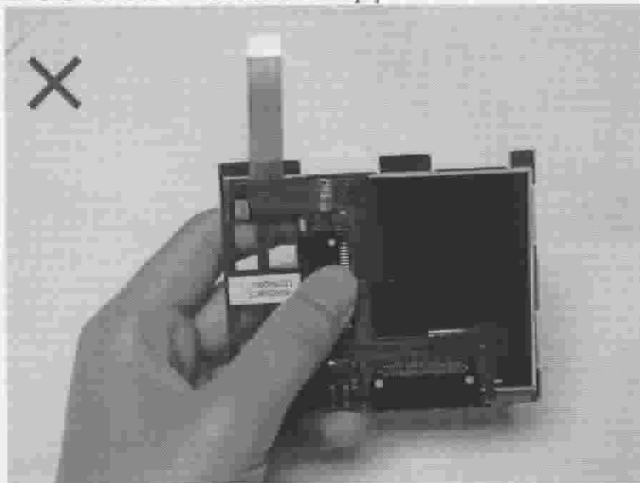


Please don't touch IC directly.

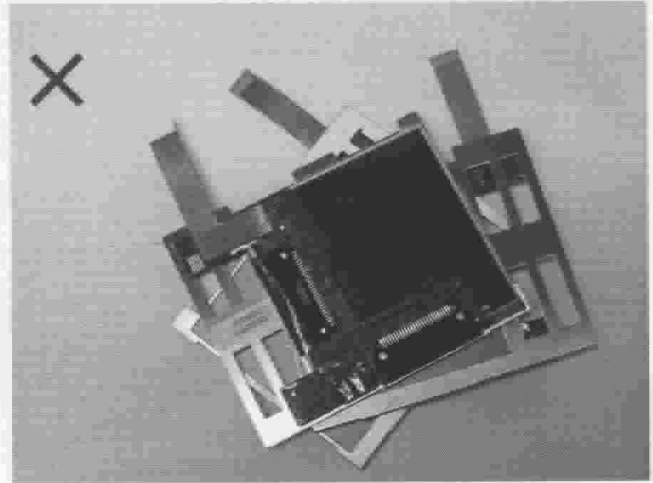

Please don't put one on another LCM.

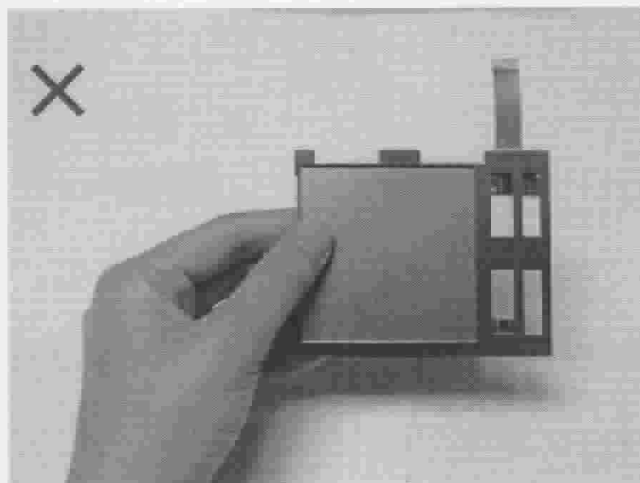

Please don't hold the surface of LCM.

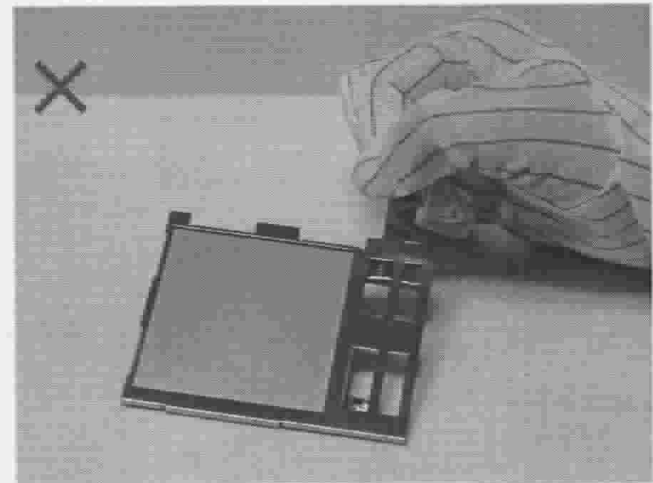



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

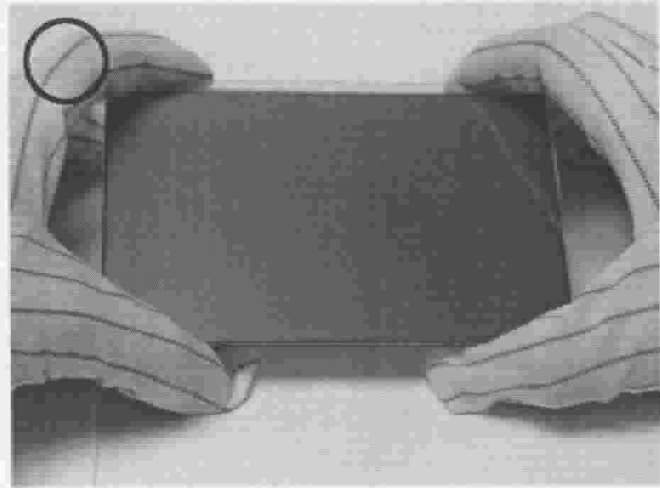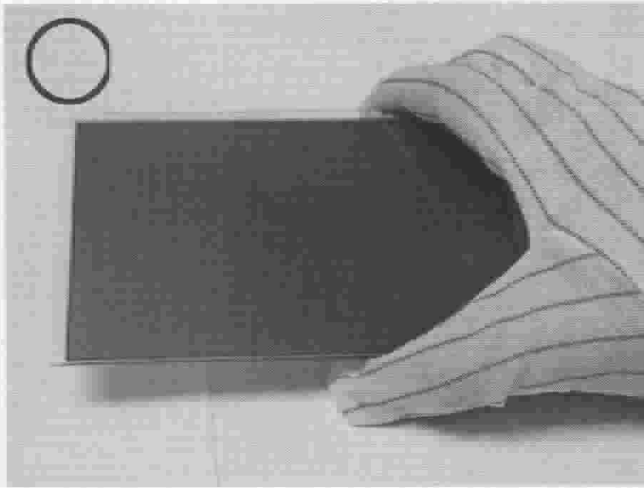


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

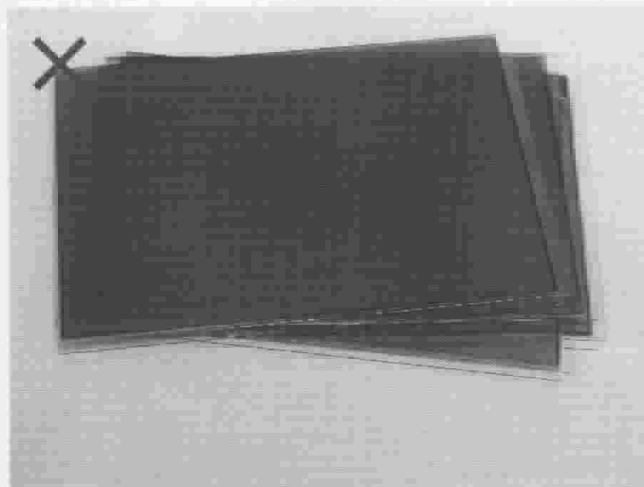


Please don't put one on another LCD.

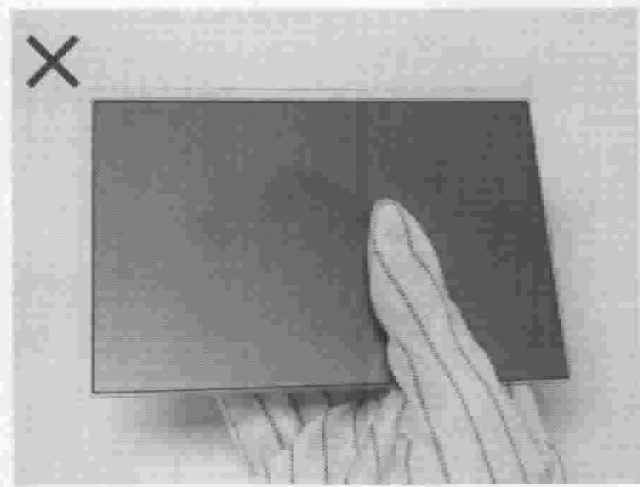

Please don't hold the surface of LCD.

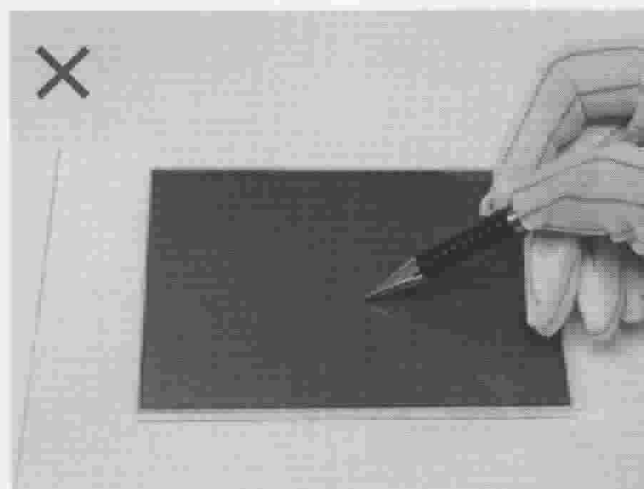

Please don't operate with sharp stick such as sharp pencil.

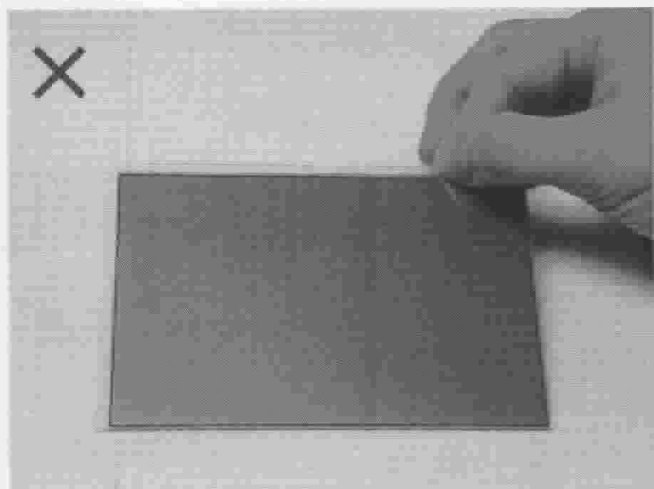

Please don't touch ITO glass without anti-static gloves.

