

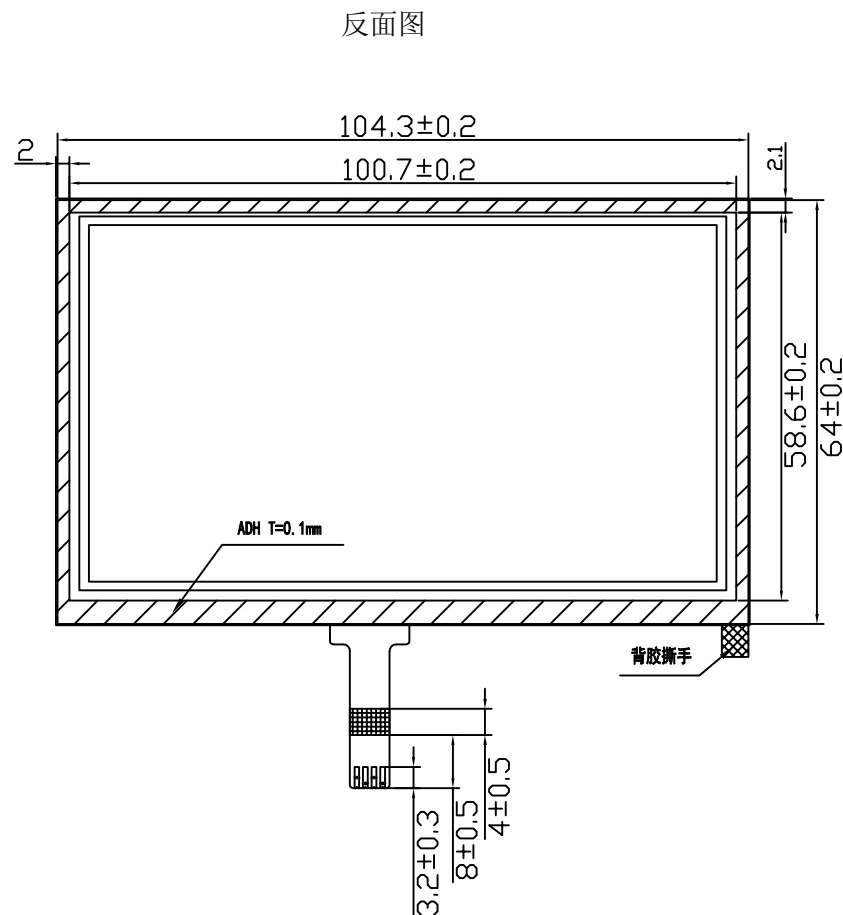


SCALE: 1 : 1 NOT TO SCALE		 瑞翔光电（惠州）有限公司	
PAGE: 1 OF 2			
GENERAL TOL. 0.20mm	UNITS MM		
APPROVALS	DATE	MODEL NUMBER : RXA-043005-04 TP-T043TPH-02	
APP Mychan	2013/11/20		
CHK Amor11	2013/11/20		CUSTOMER P/N : DATE: 2013/11/20
DWN Amor11	2013/11/20		
		PROJECTION	

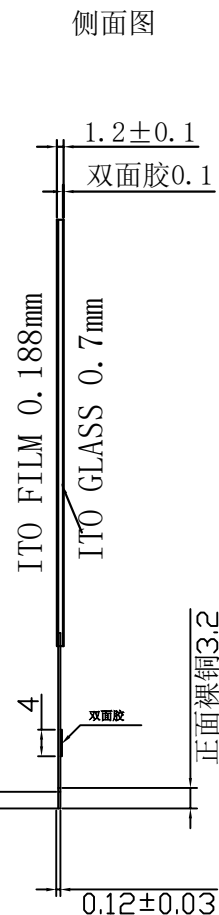

- 1、工作条件: DC5V;
- 2、操作压力: 50-120g;
- 3、线性度 $\leq \pm 1.5\%$; 绝缘阻抗 $>20M\Omega$, 25V(DC);
- 4、工作环境: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$;
- 5、储存环境: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$;
- 6、透光率: $>78\%$;
- 7、结构类型: PET/[薄膜[单层膜]/玻璃型(F/G)];
- 8、产品总厚度: 触摸屏 $1.2 \pm 0.1\text{mm}$
- 9、出线方式: FPC出线;
- 10、ITO Film: 雾面防牛防刮花。
Glass: $500\Omega/\square$ (0.7mm)
tail: FPC (pitch=1.3mm)
- 11、使用寿命: 1,000,000次;
- 12、响应时间: $<20\text{ms}$ 。
- 13、未注明公差: ± 0.2 ; 控制尺寸: