
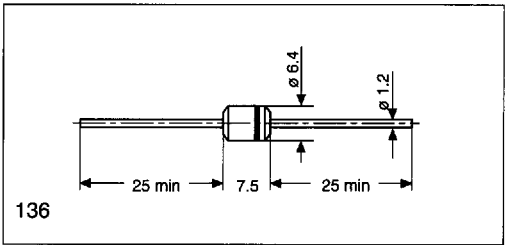
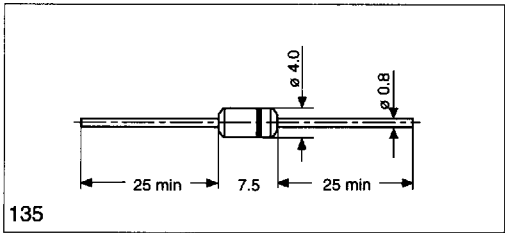


Schottky Rectifier Diodes

Type	V_{RRM} V	I_{FAVM} A $t_A = 25^\circ\text{C}$	I_{FSM} A 10 ms	V_F V $i_F = I_{FAVM}$ $t_{vj} = 25^\circ\text{C}$	R_{thJC} $^\circ\text{C/W}$	R_{thJA} $^\circ\text{C/W}$	$t_{vj\text{ max}}$ $^\circ\text{C}$	outline
BYS 21-45	45	1,0	50	0,55	-	20	125	134
BYS 21-90	90	1,0	30	0,90	-	30	125	134
BYS 22-45	45	1,7	100	0,55	-	8	125	135
BYS 22-90	90	2,0	60	0,90	-	12	125	135
BYS 24-45	45	2x5,0	120	0,55	3/3,5 *	-	125	137
BYS 24-90	90	2x5,0	80	0,90	3/3,5 *	-	125	137
BYS 26-45	45	3,0	120	0,55	-	8	125	136
BYS 26-90	90	3,0	80	0,80	-	12	125	136
BYS 27-45	45	5,0	120	0,55	-	12	125	136
BYS 28-45	45	2x15,0	250	0,55	1,4/1,7 *	-	125	138
BYS 28-90	90	2x12,5	150	0,90	1,2	-	125	138
PBYR 1645	45	16,0	135	0,63	1,4	60	150	139
■ BYV 143	45	2x15,0	200	0,77	1,4	60	150	140
■ PBYR 3045 PT	45	2x15,0	180	0,87	1,4	40	150	141
SC 802-04	45	1,0	40	0,55	-	10	125	142
30 CPQ 05	50	2x16,5	200	0,91	13,0	-	125	138
30 CPQ 06	60	2x16,5	245	1,15	13,0	-	125	138

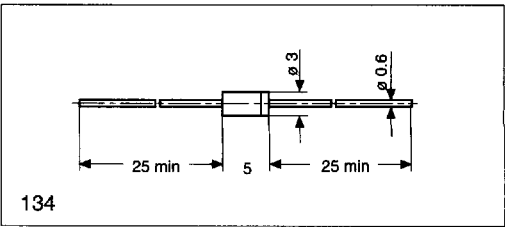

*) Also available in insulated version

■ Not for new design

