
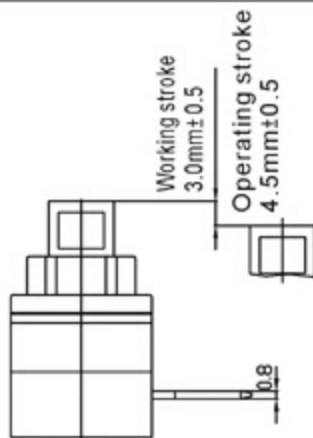





No tolerance mark

≤ 6	≥ 10	> 10
± 0.1	± 0.2	± 0.3

Product Name Model Number	Electrical Principle Drawing	Terminal Quantity	Safety Authentication
Push-Button Switch KAG-03B1		2P	UL; TUV; CE EK; CQC

Power Rating: 12(10)A 250VAC; 12A 250VAC; 16A 125VAC

Contact Resistance: $\leq 50\text{m}\Omega$

Insulation Resistance: $\geq 100\text{M}\Omega$

Dielectric Strength: pole and pole 1500VAC, pole and housing 3000VAC

Ambient Temperature: T125

Electrical: 2E4



**ZHEJIANG HONGHUA
ELECTRONICS CO.,LTD**