

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[MCLPR100V688M35X58](#)

[MCLPR100V828M35X60](#)

[MCLPR400V567M35X52](#)

[MCLPR63V568M30X40](#)

EN

This Datasheet is presented by
the manufacturer

DE


Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

Electrolytic Capacitors

LPR Series

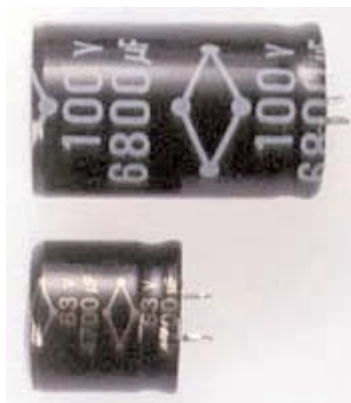

Features:

- Material : Aluminium.
- Large size snap-In.
- LPR series large size capacitors with the specially designed terminals have "self-standing" and can be directly soldered to printed circuit boards without holders.
- They are easily to fixing to printed circuit boards due to the specially designed terminals.

Specification Table

No.	Item	Performance																																																				
1	Operating Temperature Range	-40 to +85°C				-25 to +85°C																																																
2	Rated Working Voltage Range	16 - 100 V dc				250 - 400 V dc																																																
3	Nominal Capacitance Range	470 - 68,000 µF				47 - 2,700 µF																																																
4	Capacitance Tolerance	±20% (at +20°C, 120 Hz)																																																				
5	Leakage Current	I = 0.02 CV or 3,000 (µA) Max. I : Leakage Current (µA) C : Rated Capacitance (µF) V : Working Voltage (v) Whichever is greater after 3 mins.																																																				
6	Dissipation Factor (tan δ) (120 Hz / +20°C)	<table><tr><th>W V µF</th><th>16</th><th>25 - 35</th><th>50 - 63</th><th>100</th><th>250</th><th>400</th></tr><tr><td>47 - 330</td><td>-</td><td>-</td><td>-</td><td>-</td><td rowspan="2">0.15</td><td rowspan="2">0.2</td></tr><tr><td>470 - 3,300</td><td>0.25</td><td>0.2</td><td>0.2</td><td>0.2</td></tr><tr><td>4,700 - 6,800</td><td>0.35</td><td>0.3</td><td rowspan="2">0.3</td><td>0.25</td><td>-</td><td>-</td></tr><tr><td>10,000 - 22,000</td><td>0.4</td><td>0.35</td><td>-</td><td>-</td><td>-</td></tr><tr><td>27,000 - 47,000</td><td>0.45</td><td>0.4</td><td>0.35</td><td>-</td><td>-</td><td>-</td></tr><tr><td>56,000 - 68,000</td><td>0.5</td><td>0.45</td><td>-</td><td>-</td><td>-</td><td>-</td></tr></table> Less than the value under table							W V µF	16	25 - 35	50 - 63	100	250	400	47 - 330	-	-	-	-	0.15	0.2	470 - 3,300	0.25	0.2	0.2	0.2	4,700 - 6,800	0.35	0.3	0.3	0.25	-	-	10,000 - 22,000	0.4	0.35	-	-	-	27,000 - 47,000	0.45	0.4	0.35	-	-	-	56,000 - 68,000	0.5	0.45	-	-	-	-
W V µF	16	25 - 35	50 - 63	100	250	400																																																
47 - 330	-	-	-	-	0.15	0.2																																																
470 - 3,300	0.25	0.2	0.2	0.2																																																		
4,700 - 6,800	0.35	0.3	0.3	0.25	-	-																																																
10,000 - 22,000	0.4	0.35		-	-	-																																																
27,000 - 47,000	0.45	0.4	0.35	-	-	-																																																
56,000 - 68,000	0.5	0.45	-	-	-	-																																																
7	Characteristics at Low Temperature (Stability at 120 Hz)	Impedance Ratio at 100 Hz Z -25°C / Z 20°C : 3 Max. Z -40°C / Z 20°C : 12 Max.																																																				

Electrolytic Capacitors




LPR Series

Specification Table

No.	Item	Performance																																
8	Ripple Current	Refer to standard products table (120 Hz, +85°C). Correction factor for frequency.																																
		<table><tr><th>Ambient Temperature</th><th>Multiplying Factor</th></tr><tr><td>45°C and under</td><td>1.55</td></tr><tr><td>60°C</td><td>1.3</td></tr><tr><td>70°C</td><td>1.2</td></tr><tr><td>85°C</td><td>1</td></tr></table>	Ambient Temperature	Multiplying Factor	45°C and under	1.55	60°C	1.3	70°C	1.2	85°C	1																						
		Ambient Temperature	Multiplying Factor																															
		45°C and under	1.55																															
		60°C	1.3																															
		70°C	1.2																															
		85°C	1																															
		<table><tr><th rowspan="2">Frequency</th><th colspan="4">Multiplying Factor</th></tr><tr><th>16 - 25 V</th><th>50 - 100 V</th><th>250 V</th><th>400 V</th></tr><tr><td>60 Hz</td><td>0.9</td><td>0.9</td><td>0.8</td><td>0.9</td></tr><tr><td>120 Hz</td><td>1</td><td>1</td><td>1</td><td>1</td></tr><tr><td>1 Hz</td><td>1.05</td><td>1.15</td><td>1.35</td><td>1.3</td></tr><tr><td>10 kHz</td><td rowspan="2">1.1</td><td rowspan="2">1.2</td><td>1.45</td><td>1.4</td></tr><tr><td>100 kHz</td><td>1.5</td><td>1.45</td></tr></table>	Frequency	Multiplying Factor				16 - 25 V	50 - 100 V	250 V	400 V	60 Hz	0.9	0.9	0.8	0.9	120 Hz	1	1	1	1	1 Hz	1.05	1.15	1.35	1.3	10 kHz	1.1	1.2	1.45	1.4	100 kHz	1.5	1.45
		Frequency		Multiplying Factor																														
			16 - 25 V	50 - 100 V	250 V	400 V																												
60 Hz	0.9	0.9	0.8	0.9																														
120 Hz	1	1	1	1																														
1 Hz	1.05	1.15	1.35	1.3																														
10 kHz	1.1	1.2	1.45	1.4																														
100 kHz			1.5	1.45																														
9	High Temperature Loading	After 2,000 hours application of DC rated working voltage at +85°C, The capacitor shall meet the following limits: Post test requirements at +20°C.																																
		<table><tr><td>Leakage current</td><td>≤ the initial specified value</td></tr><tr><td>Capacitance change</td><td>≤ ±20% of initial measured value</td></tr><tr><td>Dissipation factor (tan δ)</td><td>≤ 200% of initial specified value</td></tr></table>	Leakage current	≤ the initial specified value	Capacitance change	≤ ±20% of initial measured value	Dissipation factor (tan δ)	≤ 200% of initial specified value																										
		Leakage current	≤ the initial specified value																															
		Capacitance change	≤ ±20% of initial measured value																															
		Dissipation factor (tan δ)	≤ 200% of initial specified value																															
10	Shelf Life	After storage for 500 hours at +85°C with no voltage applied. Post test requirements at +20°C. same limits as high temperature loading.																																

Diagram of Dimensions

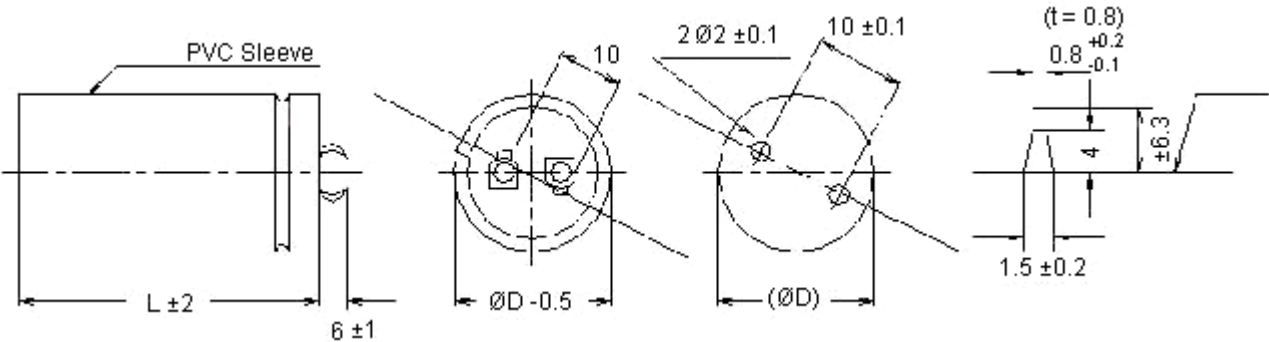

Dimensions : Millimetres



Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))
Maximum Ripple Current : A (rms)

W V	Capacitors (μF)	Case Size	R C
16 (20)	4,700	20 × 30	2.2
		22 × 25	1.8
	6,800	20 × 30	2.45
		22 × 25	2.4
	8,200	22 × 30	2.75
		22 × 25	2.7
	10,000	22 × 30	3
		25 × 25	2.85
	12,000	22 × 40	3.3
		25 × 26	3.15
	15,000	22 × 40	3.6
		25 × 31	3.55
	18,000	22 × 40	4.34
		25 × 36	4.2
	22,000	22 × 46	4.25
		25 × 36	4
	27,000	25 × 40	6.5
		30 × 36	6.3
	33,000	25 × 50	6.5
		30 × 40	5
	39,000	30 × 46	8.1
		35 × 36	7.5
	47,000	30 × 50	
		35 × 45	7
25 (32)	3,300	20 × 30	2.05
		22 × 25	2.1
	4,700	20 × 30	2.5
		25 × 25	2.3
	5,600	22 × 31	2.6
	6,800	22 × 30	2.85

Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))
Maximum Ripple Current : A (rms)

W V	Capacitors (µF)	Case Size	R C
25 (32)	6,800	25 × 26	2.7
	8,200	22 × 40	3.15
		25 × 26	3
	10,000	22 × 40	3.45
		25 × 31	3.15
	12,000	22 × 50	3.8
		25 × 40	3.75
	15,000	22 × 50	3.8
		25 × 45	3.6
	18,000	25 × 50	4.7
		30 × 41	4.5
	22,000	25 × 50	4.95
		35 × 30	5.2
	27,000	30 × 46	5.9
		35 × 36	6.5
35 (44)	33,000	30 × 50	8.95
	39,000	35 × 42	8.8
	47,000	35 × 50	9
	2,200	22 × 25	2.18
	3,900	22 × 30	2.5
	4,700	22 × 30	2.45
		25 × 26	2.4
	6,800	22 × 40	3
		25 × 30	2.9
	8,200	22 × 40	3.45
		25 × 30	3.25
	10,000	22 × 46	3.5
		25 × 40	3.4
	12,000	25 × 40	3.85
		35 × 35	3.7
	15,000	25 × 50	4.5
		30 × 40	4.1

Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))
Maximum Ripple Current : A (rms)

W V	Capacitors (μF)	Case Size	R C
35 (44)	18,000	30 × 46	4.8
		35 × 37	4.6
	22,000	30 × 50	5.7
		35 × 42	4.9
	27,000	35 × 50	5.7
	33,000	35 × 51	6.45
50 (63)	1,500	22 × 26	1.4
	2,200	22 × 25	1.9
		25 × 25	2
	2,700	22 × 31	2.3
	3,300	22 × 31	2.5
		25 × 26	2.4
	4,700	22 × 36	3
		25 × 31	2.9
	5,600	22 × 40	3
		25 × 36	2.8
	6,800	22 × 50	3
		25 × 40	2.85
	8,200	25 × 46	3.6
		35 × 35	3.8
	10,000	25 × 50	3.9
		30 × 40	3.75
	12,000	30 × 50	4.55
		35 × 40	4.35
63 (79)	1,000	30 × 50	5.3
		35 × 42	4.7
	1,500	35 × 47	5.3
		35 × 52	5.8
		22 × 30	1.5
		22 × 25	1.45
	1,500	22 × 30	1.8
		22 × 25	1.75

Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))
Maximum Ripple Current : A (rms)

W V	Capacitors (µF)	Case Size	R C
63 (79)	2,200	22 × 30	2.1
		25 × 26	2
	2,700	22 × 36	2.8
		25 × 31	2.7
	3,300	22 × 40	2.81
		25 × 31	2.76
	3,900	22 × 40	3.2
		25 × 36	3.1
	4,700	22 × 50	3.2
		25 × 40	3.11
	5,600	25 × 46	3.8
		30 × 36	3.6
	6,800	25 × 50	3.68
		30 × 40	3.54
100 (125)	470	20 × 30	1.3
		22 × 25	1.15
	680	22 × 25	1.53
		22 × 30	1.55
	820	25 × 26	1.54
		22 × 30	2.2
	1,000	25 × 25	1.71
		22 × 36	2.3
	1,200	25 × 31	2.2
		22 × 40	2.54
	1,500	25 × 31	2.38
		22 × 46	2.2
	1,800	25 × 41	2.05
		22 × 50	3.07
	2,200	25 × 41	2.77
		25 × 46	3.15

Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))
Maximum Ripple Current : A (rms)

W V	Capacitors (µF)	Case Size	R C
100 (125)	2,700	30 × 36	3
	3,300	25 × 50	3.39
		30 × 41	3.27
	3,900	30 × 46	3.5
		35 × 37	3.3
	4,700	30 × 51	3.7
		35 × 42	3.5
	5,600	35 × 47	3.9
	6,800	35 × 50	4.85
	8,200	35 × 60	5.3
250 (300)	120	20 × 30	0.9
		22 × 25	0.75
	150	20 × 30	1
		22 × 25	0.97
	180	22 × 26	1.1
	220	22 × 30	1.35
		25 × 25	1.09
	270	22 × 31	1.11
		25 × 25	1.05
	330	22 × 40	1.58
		25 × 31	1.42
	390	22 × 41	2
		25 × 36	1.85
	470	22 × 46	2.08
		25 × 41	1.93
	560	25 × 45	2.29
		30 × 36	2.22
	680	25 × 50	2.68
		30 × 40	2.46
	820	30 × 45	3.11
		35 × 40	2.83

Electrolytic Capacitors



LPR Series

Case Size Table and Permissible Ripple Current (Case Size : ØD × L (mm))

Maximum Ripple Current : A (rms)

W V	Capacitors (μF)	Case Size	R C
250 (300)	1,000	30 × 50	3.6
		35 × 42	3.35
	1,200	35 × 46	4
	1,500	35 × 52	5
400 (450)	47	25 × 25	0.4
		35 × 30	0.28
	68	22 × 25	0.51
	82	22 × 26	0.6
	100	22 × 30	0.68
		25 × 25	0.65
	120	22 × 31	0.9
		25 × 25	0.87
	150	22 × 41	0.95
		25 × 31	0.85
	220	22 × 50	1.27
		25 × 41	1.17
	270	25 × 46	1.65
		30 × 36	1.59
	330	30 × 41	1.9
		35 × 37	1.75
	390	30 × 36	2.19
	470	35 × 47	2.5
	560	35 × 52	2.79

Part Number Table

Description	Part Number
CAPACITOR, 4700UF, 16V	MCLPR16V478M22X25
CAPACITOR, 6800UF, 16V	MCLPR16V688M22X25
CAPACITOR, 8200UF, 16V	MCLPR16V828M22X30
CAPACITOR, 10000UF, 16V	MCLPR16V109M22X25
CAPACITOR, 12000UF, 16V	MCLPR16V129M22X40
CAPACITOR, 15000UF, 16V	MCLPR16V159M22X35
CAPACITOR, 18000UF, 16V	MCLPR16V189M25X36
CAPACITOR, 22000UF, 16V	MCLPR16V229M22X41

Description	Part Number
CAPACITOR, 27000UF, 16V	MCLPR16V279M30X32
CAPACITOR, 33000UF, 16V	MCLPR16V339M30X45
CAPACITOR, 39000UF, 16V	MCLPR16V399M30X50
CAPACITOR, 47000UF, 16V	MCLPR16V479M35X45
CAPACITOR, 56000UF, 16V	MCLPR16V569M35X50
CAPACITOR, 68000UF, 16V	MCLPR16V689M35X62
CAPACITOR, 3300UF, 25V	MCLPR25V338M22X25
CAPACITOR, 4700UF, 25V	MCLPR25V478M22X25

Electrolytic Capacitors



LPR Series

Part Number Table

Description	Part Number
CAPACITOR, 5600UF, 25V	MCLPR25V568M22X31
CAPACITOR, 6800UF, 25V	MCLPR25V688M22X30
CAPACITOR, 8200UF, 25V	MCLPR25V828M22X35
CAPACITOR, 10000UF, 25V	MCLPR25V109M30X25
CAPACITOR, 12000UF, 25V	MCLPR25V129M22X50
CAPACITOR, 15000UF, 25V	MCLPR25V159M30X35
CAPACITOR, 18000UF, 25V	MCLPR25V189M25X41
CAPACITOR, 22000UF, 25V	MCLPR25V229M30X45
CAPACITOR, 27000UF, 25V	MCLPR25V279M30X41
CAPACITOR, 33000UF, 25V	MCLPR25V339M30X51
CAPACITOR, 39000UF, 25V	MCLPR25V399M35X51
CAPACITOR, 47000UF, 25V	MCLPR25V479M35X56
CAPACITOR, 2200UF, 35V	MCLPR35V228M22X25
CAPACITOR, 3900UF, 35V	MCLPR35V398M22X30
CAPACITOR, 4700UF, 35V	MCLPR35V478M22X30
CAPACITOR, 6800UF, 35V	MCLPR35V688M26X30
CAPACITOR, 8200UF, 35V	MCLPR35V828M22X41
CAPACITOR, 10000UF, 35V	MCLPR35V109M30X30
CAPACITOR, 12000UF, 35V	MCLPR35V129M25X41
CAPACITOR, 15000UF, 35V	MCLPR35V159M30X40
CAPACITOR, 18000UF, 35V	MCLPR35V189M30X46
CAPACITOR, 22000UF, 35V	MCLPR35V229M35X45
CAPACITOR, 27000UF, 35V	MCLPR35V279M25X50
CAPACITOR, 33000UF, 35V	MCLPR35V339M25X51
CAPACITOR, 1500UF, 50V	MCLPR50V158M22X26
CAPACITOR, 2200UF, 50V	MCLPR50V228M22X25
CAPACITOR, 2700UF, 50V	MCLPR50V278M22X31
CAPACITOR, 3300UF, 50V	MCLPR50V338M22X31
CAPACITOR, 4700UF, 50V	MCLPR50V478M30X25
CAPACITOR, 5600UF, 50V	MCLPR50V568M25X40
CAPACITOR, 6800UF, 50V	MCLPR50V688M25X41
CAPACITOR, 8200UF, 50V	MCLPR50V828M30X46
CAPACITOR, 10000UF, 50V	MCLPR50V109M35X35
CAPACITOR, 12000UF, 50V	MCLPR50V129M30X45

Description	Part Number
CAPACITOR, 15000UF, 50V	MCLPR50V159M30X51
CAPACITOR, 18000UF, 50V	MCLPR50V189M35X55
CAPACITOR, 22000UF, 50V	MCLPR50V229M35X52
CAPACITOR, 1000UF, 63V	MCLPR63V108M22X25
CAPACITOR, 1500UF, 63V	MCLPR63V158M22X30
CAPACITOR, 2200UF, 63V	MCLPR63V228M26X25
CAPACITOR, 2700UF, 63V	MCLPR63V278M25X31
CAPACITOR, 3300UF, 63V	MCLPR63V338M25X35
CAPACITOR, 3900UF, 63V	MCLPR63V398M25X40
CAPACITOR, 4700UF, 63V	MCLPR63V478M26X40
CAPACITOR, 5600UF, 63V	MCLPR63V568M30X40
CAPACITOR, 6800UF, 63V	MCLPR63V688M30X40
CAPACITOR, 8200UF, 63V	MCLPR63V828M30X46
CAPACITOR, 10000UF, 63V	MCLPR63V109M30X50
CAPACITOR, 470UF, 100V	MCLPR100V477M22X25
CAPACITOR, 680UF, 100V	MCLPR100V687M22X30
CAPACITOR, 820UF, 100V	MCLPR100V827M25X30
CAPACITOR, 1000UF, 100V	MCLPR100V108M22X30
CAPACITOR, 1200UF, 100V	MCLPR100V128M25X35
CAPACITOR, 1500UF, 100V	MCLPR100V158M25X40
CAPACITOR, 1800UF, 100V	MCLPR100V188M25X41
CAPACITOR, 2200UF, 100V	MCLPR100V228M26X40
CAPACITOR, 2700UF, 100V	MCLPR100V278M35X35
CAPACITOR, 3300UF, 100V	MCLPR100V338M30X41
CAPACITOR, 3900UF, 100V	MCLPR100V398M35X45
CAPACITOR, 4700UF, 100V	MCLPR100V478M30X50
CAPACITOR, 5600UF, 100V	MCLPR100V568M35X50
CAPACITOR, 6800UF, 100V	MCLPR100V688M35X58
CAPACITOR, 8200UF, 100V	MCLPR100V828M35X60
CAPACITOR, 10000UF, 100V	MCLPR100V109M40X64
CAPACITOR, 120uF, 250V	MCLPR250V127M22X25
CAPACITOR, 150uF, 250V	MCLPR250V157M22X25
CAPACITOR, 180uF, 250V	MCLPR250V187M25X26
CAPACITOR, 220uF, 250V	MCLPR250V227M22X32

Electrolytic Capacitors

LPR Series



Part Number Table

Description	Part Number
CAPACITOR, 270uF, 250V	MCLPR250V277M22X32
CAPACITOR, 330uF, 250V	MCLPR250V337M22X40
CAPACITOR, 390uF, 250V	MCLPR250V397M22X41
CAPACITOR, 470uF, 250V	MCLPR250V477M25X41
CAPACITOR, 560uF, 250V	MCLPR250V567M30X40
CAPACITOR, 680uF, 250V	MCLPR250V687M30X40
CAPACITOR, 820uF, 250V	MCLPR250V827M35X45
CAPACITOR, 1000uF, 250V	MCLPR250V108M35X45
CAPACITOR, 1200uF, 250V	MCLPR250V128M35X46
CAPACITOR, 1500uF, 250V	MCLPR250V158M35X62
CAPACITOR, 47UF, 400V	MCLPR400V476M22X25
CAPACITOR, 68UF, 400V	MCLPR400V686M22X25
CAPACITOR, 82UF, 400V	MCLPR400V826M22X25
CAPACITOR, 100UF, 400V	MCLPR400V107M22X30
CAPACITOR, 120UF, 400V	MCLPR400V127M25X30
CAPACITOR, 150UF, 400V	MCLPR400V157M25X31
CAPACITOR, 220UF, 400V	MCLPR400V227M26X40
CAPACITOR, 270UF, 400V	MCLPR400V277M25X46
CAPACITOR, 330UF, 400V	MCLPR400V337M30X41
CAPACITOR, 390UF, 400V	MCLPR400V397M30X45
CAPACITOR, 470UF, 400V	MCLPR400V477M35X40
CAPACITOR, 560UF, 400V	MCLPR400V567M35X52

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[MCLPR100V688M35X58](#) [MCLPR100V828M35X60](#) [MCLPR400V567M35X52](#) [MCLPR63V568M30X40](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant