
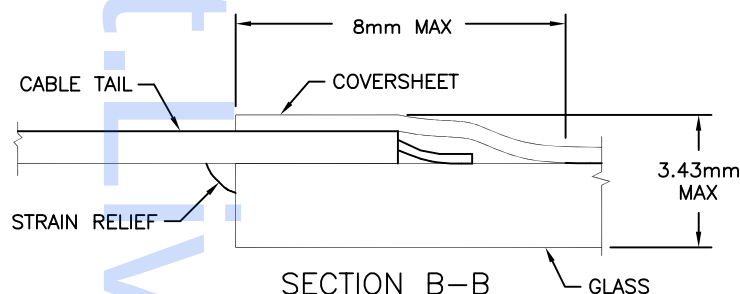
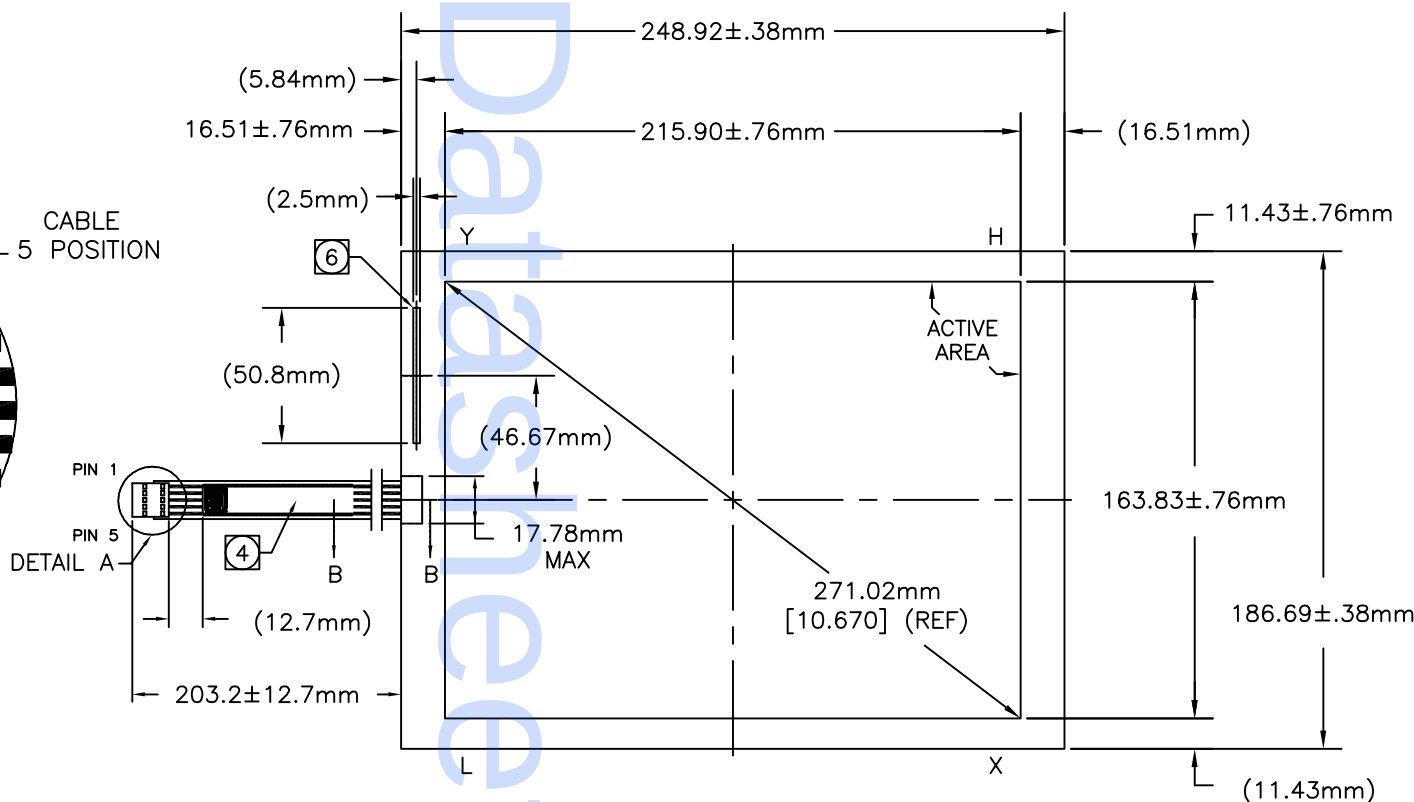


CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

THIS DRAWING IS A CONTROLLED DOCUMENT. MS600286

TYCO (AMP)
487378-4
OR EQUIVALENT

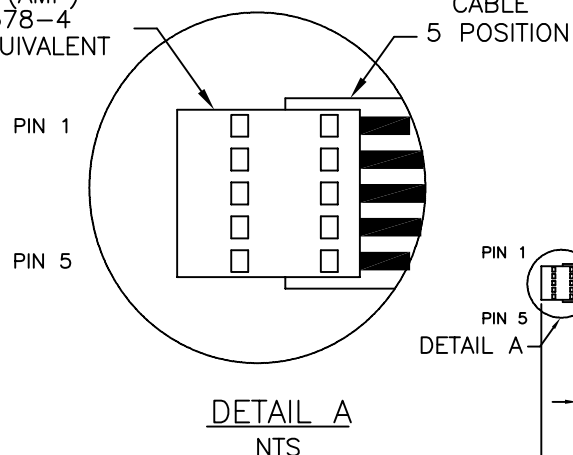

NOTES:

- GLASS THICKNESS 2.36mm NOMINAL.
- FINISHED PART THICKNESS 2.67mm NOMINAL.
- FINISHED PART THICKNESS AT CABLE ATTACHMENT AREA 3.43mm MAX.
- LABEL TO BE ATTACHED TO FRONT SIDE OF CABLE.
- CABLE IS ATTACHED TO THE LEFT SIDE OF TOUCHSCREEN AT CENTER POINT AS SHOWN.
- FINISHED PART THICKNESS AT THE COVERSHEET CONTACT 3.05mm MAX.

LOC
08
DIST
08

P	LTR	REVISION RECORD	DATE	DRN	APVD
B		REVISED PER ECO-12-015013 ELO TITLE BLOCK WAS TE	09/10/12	DI	
A		INITIAL RELEASE	03/13/06		

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED
mm		
	0 PLC ± -	
	1 PLC ± -	
	2 PLC ± -	
	3 PLC ± -	
ANGLES ± -		4 PLC ± -
SURFACE TEXTURE		N/A

DRN	MATERIAL	HEAT TREAT
CHK	ACCUTOUCH	
APVD		
NAME		
DIMENSIONAL DRAWING, SCN-A5-FLT10.4-Z01-0H1-R		
SCALE	SIZE	DRAWING NO
1:1	A2	MS600286
SHEET	OF	REV
1	1	B