

Data Sheet

JS1-H and PVG Sub-Systems

Danfoss Power Solutions (DPS) has more than 40 years of experience in market-leading solutions for many applications. Our product portfolio contains a large variety of products that enables the possibility to create unique sub-systems comprising of multiple DPS products.

It is possible to create a sub-system by combining a JS1-H joystick and a proportional valve group (PVG). Despite its ease of installation and simplicity of setup, this sub-system provides excellent controllability in various applications and a superb human to machine experience.


Features

- Operator Presence switch
- Multiple output options
- Simultaneous operation of two proportional rollers
- Hall effect with two sensors per axis or long-life potentiometer position sensing
- Modular PVG concept
- For all PVG types 16-32-100-128-256
- Flow 5-500 l/min [1.3-132 US gal/min]
- Works with both compensated and uncompensated basic modules


Comprehensive technical literature is online at www.danfoss.com

Relevant literature

- JS1-H Technical Information, BC171886484518
- PVG 32 Technical Information, BC152886483664

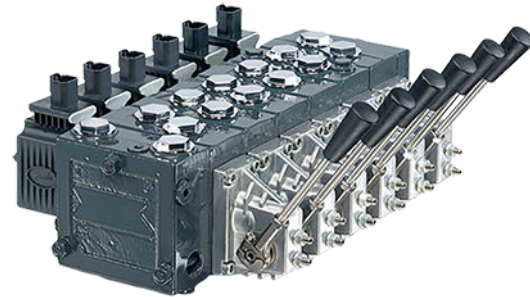

Flow characteristics

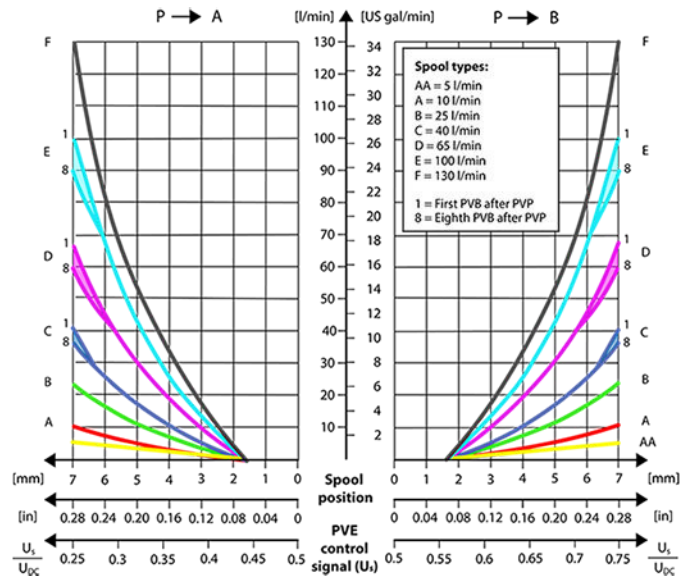


AI318980628222en-000102


DEUTSCH




DIN/Hirschmann



AMP



JS1-H DEUTSCH DTM 04



Connector	Pin 1	Pin 2	Pin 3	Pin 4
DEUTSCH	Us	Error	Ground	Power
AMP	Us	Power	Ground	Error
DIN/Hirschmann	Power	Us	Error	Ground

JS1-H pin description (DEUTSCH DTM 04 Connector)

Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9	Pin 10	Pin 11	Pin 12
Ground	Power	CAN High	CAN Low	CAN Shield	Proportional Y	Proportional X	Proportional 3	Push 7	Push 8	PVE Power	PVE power feedback