




REV	MARK	HISTORY	DATE	NAME
-----	------	---------	------	------

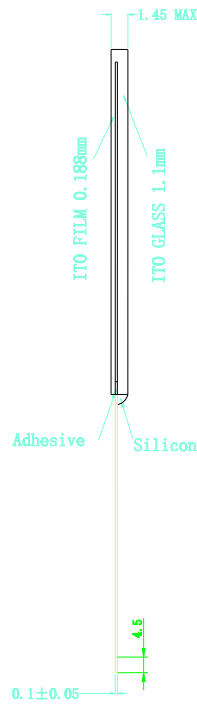

PIN	WIRING
1	Y1
2	X1
3	Y2
4	X2



- 注意:
1. 上线材料:0.188mm 雾面防牛350-500欧姆
 2. 下线材料:1.1mm 350-500欧姆
 3. 透光率:≥75%
 4. 线性值:≤1.5%
 5. 接口方式:FPC
 6. 电阻值:左右:400 -1000 Ω
上下:150 -600 Ω
 7. 使用温度:-20° C~+70° C.
储存温度:-30° C~+80° C.

序号	备注
1	FPC正插:28-01
2	
3	
4	

惠州深拓光电有限公司
HUIZHOU SHEN TUO TOUCH&E SCIENCE-TECHNOLOGY Co.,Ltd.

Unspecified Tolerance
±0.20
DESIGNED BY:
CHECKED BY:

ST-05001



VERSION: VERSION
NO. 1 OF 1
UNIT: MM
DATE: 2018-10-26