



Datasheet

AUO

G121XTN01.0

UP-02-118

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

() Preliminary Specifications
(V) Final Specifications

Module	12.1 Inch Color TFT-LCD
Model Name	G121XTN01.0

Customer _____ Date _____ Checked & Approved by _____	Approved by _____ Date <u>2014/05/27</u> Prepared by _____ <u>2014/05/27</u>
Note: This Specification is subject to change without notice.	
General Display Business Division / AU Optronics corporation	

Contents

1. Operating Precautions	5
2. General Description	6
2.1 Display Characteristics	6
2.2 Optical Characteristics	7
3. Functional Block Diagram	10
4. Absolute Maximum Ratings.....	11
4.1 Absolute Ratings of TFT LCD Module.....	11
4.2 Absolute Ratings of Environment.....	11
5. Electrical Characteristics.....	12
5.1 TFT LCD Module	12
5.2 Backlight Unit.....	14
6. Signal Characteristics.....	15
6.1 Pixel Format Image.....	15
6.2 Scanning Direction.....	15
6.3 TFT-LCD Interface Signal Description	16
6.4 The Input Data Format.....	17
6.5 TFT-LCD Interface Timing.....	18
6.6 Power ON/OFF Sequence	19
7. Connector & Pin Assignment	20
7.1 TFT-LCD Signal (CN1): LCD Connector	20
7.2 LED Backlight Unit (CN2): Driver Connector	20
7.3 LED Backlight Unit (CN3): Light bar Connector	20
8. Reliability Test Criteria.....	21
9. Mechanical Characteristics	22
9.1 LCM Outline Dimension (Front View).....	22
9.2 LCM Outline Dimension (Rear View)	23
10. Label and Packaging	24
10.1 Shipping Label (on the rear side of TFT-LCD display)	24
10.2 Carton Package	24
11 Safety.....	25
11.1 Sharp Edge Requirements.....	25
11.2 Materials.....	25
11.3 Capacitors	25
11.4 National Test Lab Requirement.....	25

Version and Date	Page	Old description	New Description
0.1 2013/07/17	All	First Edition	
0.2 2013/11/19	6	Typical Power Consumption: [Watt] TBD (typ.) All black pattern	Typical Power Consumption: [Watt] 6.75 (typ.) All black pattern
	7	I _F =60mA/1 LED Line	I _F =55mA/1 LED Line
	7	Color / Chromaticity Coordinates : (CIE 1931)	Color / Chromaticity Coordinates : (CIE 1931)
	12	Symbol Parameter Min Typ Max Units Remark VDD Logic/LCD Input Voltage 3.0 3.3 3.6 [V] VDD=3.3V at 60 HZ, all Black Pattern I _{VDD} LCD Input Current TBD TBD [mA] P _{VDD} LCD Power consumption TBD TBD [Watt] I _{peak LCD} LCD Inrush Current TBD [A] Note 1: VDD=3.3V, Black Pattern, Rising time=470μs VDD _{ripple} Allowable Logic/LCD Drive Ripple Voltage 100 [mV] p-p VDD=3.3V at 60 HZ, all Black Pattern	Symbol Parameter Min Typ Max Units Remark VDD Logic/LCD Input Voltage 3.0 3.3 3.6 [V] VDD=3.3V at 60 HZ, all Black Pattern I _{VDD} LCD Input Current 500 710 [mA] P _{VDD} LCD Power consumption 1.95 2.34 [Watt] I _{peak LCD} LCD Inrush Current 3 [A] Note 1: VDD=3.3V, Black Pattern, Rising time=470μs VDD _{ripple} Allowable Logic/LCD Drive Ripple Voltage 100 [mV] p-p VDD=3.3V at 60 HZ, all Black Pattern
0.3 2014/02/19	14	Symbol Parameter Min Typ Max Unit Remark VCC Input Voltage 10.8 12 12.6 [V] I _{VCC} Input Current TBD [A] 100% PWM Duty, Ta=25°C P _{VCC} Power Consumption TBD TBD [Watt] 100% PWM Duty, Ta=25°C F _{FW} Dimming Frequency 200 20K [Hz] V _{FW} Swing Voltage 3 3.3 5.5 [V] Dimming duty cycle 5 100 % I _F LED Forward Current 60 [mA] Ta=25°C V _F LED Forward Voltage (25.6) 27.2 [V] I _F =60mA, Ta=-30°C P _{LED} LED Power Consumption 4.608 4.896 [Watt] I _F =60mA, Ta=25°C Operation Life 30 000 Hrs I _F =60mA, Ta=25°C	Symbol Parameter Min Typ Max Unit Remark VCC Input Voltage 10.8 12 12.6 [V] I _{VCC} Input Current 400 [mA] 100% PWM Duty, Ta=25°C P _{VCC} Power Consumption 4.8 6 [Watt] 100% PWM Duty, Ta=25°C F _{FW} Dimming Frequency 200 20K [Hz] V _{FW} Swing Voltage 3 3.3 5.5 [V] Dimming duty cycle 5 100 % I _F LED Forward Current 55 [mA] Ta=25°C V _F LED Forward Voltage (25.6) 27.2 [V] I _F =55mA, Ta=-30°C P _{LED} LED Power Consumption 4.224 4.488 [Watt] I _F =55mA, Ta=25°C Operation Life 30 000 Hrs I _F =55mA, Ta=25°C
	7	Typical Power Consumption: [Watt] 6.75 (typ.) All black pattern	Typical Power Consumption: [Watt] 5.31 (typ.) All black pattern
	7	Weight: [Grams] 495 (Max)	Weight: [Grams] 620 (Max)
1.0 2014/04/09	14	Symbol Parameter Min Typ Max Unit Remark VCC Input Voltage 10.8 12 12.6 [V] I _{VCC} Input Current 400 [mA] 100% PWM Duty, Ta=25°C P _{VCC} Power Consumption 4.8 6 [Watt] 100% PWM Duty, Ta=25°C F _{FW} Dimming Frequency 200 20K [Hz] V _{FW} Swing Voltage 3 3.3 5.5 [V] Dimming duty cycle 5 100 % I _F LED Forward Current 55 [mA] Ta=25°C V _F LED Forward Voltage (25.6) 27.2 [V] I _F =55mA, Ta=-30°C P _{LED} LED Power Consumption 4.224 4.488 [Watt] I _F =55mA, Ta=25°C Operation Life 30 000 Hrs I _F =55mA, Ta=25°C	Symbol Parameter Min Typ Max Unit Remark VCC Input Voltage 10.8 12 12.6 [V] I _{VCC} Input Current 280 [mA] 100% PWM Duty, Ta=25°C P _{VCC} Power Consumption 3.36 4.20 [Watt] 100% PWM Duty, Ta=25°C F _{FW} Dimming Frequency 200 20K [Hz] V _{FW} Swing Voltage 3 3.3 5.5 [V] Dimming duty cycle 5 100 % I _F LED Forward Current 50 [mA] Ta=25°C V _F LED Forward Voltage (19.2) 21.6 [V] I _F =50mA, Ta=-30°C P _{LED} LED Power Consumption 2.88 3.24 [Watt] I _F =50mA, Ta=25°C Operation Life 30 000 Hrs I _F =50mA, Ta=25°C
	20	7.2 LED Backlight Unit (CN2): Driver Connector: Connector Name / Designation: Lamp Connector: Manufacturer: ENTERY or compatible Connector Model Number: 3808K-F05N-02R or compatible Mating Model Number: H208K-P05N-02B or compatible	7.2 LED Backlight Unit (CN2): Driver Connector: Connector Name / Designation: Lamp Connector: Manufacturer: ENTERY or compatible Connector Model Number: 3808K-F05N-12R or compatible Mating Model Number: H208K-P05N-02B or compatible
	7	Color / Chromaticity Coordinates : (CIE 1931)	Color / Chromaticity Coordinates : (CIE 1931)
1.0 2014/04/09	14	Operation Life: 30 000 Hrs I _F =50mA, Ta=25°C	Operation Life: 50 000 Hrs I _F =50mA, Ta=25°C

1.1 2014/05/08	24	10.1 Shipping Label (on the rear side of TFT-LCD display)- Production week code Manufactured YYWW Model No: G121XTN01 AU Optonics MADE IN XXXXX (XX) V.0 XXXXG RoHS 15 Internal control code Production site code Model control code Lot number G: Green design (RoHS directive) X: Non-Green design	10.1 Shipping Label (on the rear side of TFT-LCD display)- Production week code Manufactured YYWW Model No: G121XTN01.0 AU Optonics MADE IN XXXXX (XX) XXXXG RoHS 15 Internal control code Production site code Model control code Lot number G: Green design (RoHS directive) X: Non-Green design																												
1.2 2014/05/27	16	<table><tr><td>17-</td><td>RIN3-</td><td>LVDS receiver signal channel 3-, NC for 6 bit LVDS Input.</td><td>*Note5-</td></tr><tr><td>18-</td><td>RIN3+</td><td>LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)-</td><td></td></tr><tr><td>19-</td><td>RSV-</td><td>Reverse Scan Function [H: Enable, L/NC: Disable]-</td><td></td></tr><tr><td>20-</td><td>NC/GND-</td><td>Reserved for AUO internal test. Please treat it as NC.</td><td></td></tr></table> Note 1: Input Signals shall be in low status when VDD is off. Note 2: High stands for "3.3V", Low stands for "0V", NC stands for "No Connection". Note 3: RSV stands for "Reserved". Note 4: Input signals shall be in low status when VDD is off. Note 5: If 6 bits mode, please keep the Pin 17 & Pin 18 NC or make sure that the Voltage of Pin 17 is always higher than the Voltage of Pin 18.	17-	RIN3-	LVDS receiver signal channel 3-, NC for 6 bit LVDS Input.	*Note5-	18-	RIN3+	LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)-		19-	RSV-	Reverse Scan Function [H: Enable, L/NC: Disable]-		20-	NC/GND-	Reserved for AUO internal test. Please treat it as NC.		<table><tr><td>17-</td><td>RIN3-</td><td>LVDS receiver signal channel 3-</td></tr><tr><td>18-</td><td>RIN3+</td><td>LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)- pin17=VDD&pin 18=GND for 6bit LVDS Input (support)</td></tr><tr><td>19-</td><td>RSV-</td><td>Reverse Scan Function [H: Enable, L/NC: Disable]-</td></tr><tr><td>20-</td><td>NC/GND-</td><td>Reserved for AUO internal test. Please treat it as NC.</td></tr></table> Note 1: Input Signals shall be in low status when VDD is off. Note 2: High stands for "3.3V", Low stands for "0V", NC stands for "No Connection". Note 3: RSV stands for "Reserved". Note 4: Input signals shall be in low status when VDD is off. Note 5:	17-	RIN3-	LVDS receiver signal channel 3-	18-	RIN3+	LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)- pin17=VDD&pin 18=GND for 6bit LVDS Input (support)	19-	RSV-	Reverse Scan Function [H: Enable, L/NC: Disable]-	20-	NC/GND-	Reserved for AUO internal test. Please treat it as NC.
17-	RIN3-	LVDS receiver signal channel 3-, NC for 6 bit LVDS Input.	*Note5-																												
18-	RIN3+	LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)-																													
19-	RSV-	Reverse Scan Function [H: Enable, L/NC: Disable]-																													
20-	NC/GND-	Reserved for AUO internal test. Please treat it as NC.																													
17-	RIN3-	LVDS receiver signal channel 3-																													
18-	RIN3+	LVDS Differential Data Input (R6, R7, G6, G7, B6, B7, RSV)- pin17=VDD&pin 18=GND for 6bit LVDS Input (support)																													
19-	RSV-	Reverse Scan Function [H: Enable, L/NC: Disable]-																													
20-	NC/GND-	Reserved for AUO internal test. Please treat it as NC.																													

1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharge) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials without flammability grade are used in the TFT-LCD module. The TFT-LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.

2. General Description

This specification applies to the Color Active Matrix Liquid Crystal Display G121XTN01.0 composed of a TFT-LCD display, a driver and power supply circuit, and a LED backlight system.

The screen format is intended to support XGA (1024(H) x 768(V)) screen and 16.2M (RGB 8-bits) or 262k colors (RGB 6-bits).

LED driving board for backlight unit is included in G121XTN01.0 and the LED unit is replaceable.

All input signals are LVDS interface and compatible with G121SN01 V3 and G121SN01 V4.

G121XTN01.0 designed with wide viewing angle; wide temperature and long life LED backlight is well suited for industrial applications. G121XTN01.0 is a RoHS product.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	12.1
Active Area	[mm]	245.76 (H) x 184.32 (V)
Pixels H x V		1024 x 768
Pixel Pitch	[mm]	0.24 x 0.24
Pixel Arrangement		R.G.B.W Rectangle
Display Mode		TN, Normally White
Nominal Input Voltage VDD	[Volt]	3.3 (typ.)
Typical Power Consumption	[Watt]	5.31 (typ.) All black pattern
Weight	[Grams]	620 (Max.)
Physical Size	[mm]	279.0(H) x 209.0(V) x 9.0(D) (Max.)
Electrical Interface		1 channel LVDS
Surface Treatment		Anti-glare, Hardness 3H
Support Color		16.2M / 262K colors
Temperature Range		
Operating	[°C]	-30 to +85
Storage (Non-Operating)	[°C]	-30 to +85
RoHS Compliance		RoHS Compliance

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Remark
White Luminance	[cd/m ²]	I _F =50mA/1 LED Line (center point)	375	500	-	Note 1
Uniformity	%	5 Points	75	-	-	Note 2, 3
Contrast Ratio			500	700	-	Note 4
Response Time	[msec]	Rising	-	25	35	Note 5
	[msec]	Falling	-	10	20	
	[msec]	Raising + Falling	-	35	55	
Viewing Angle	[degree]	Horizontal (Right)	70	80	-	Note 6
	[degree]	CR = 10 (Left)	70	80	-	
	[degree]	Vertical (Upper)	70	80	-	
	[degree]	CR = 10 (Lower)	70	80	-	
Color / Chromaticity Coordinates (CIE 1931)		Red x	0.590	0.640	0.690	
		Red y	0.293	0.343	0.393	
		Green x	0.274	0.324	0.374	
		Green y	0.575	0.625	0.685	
		Blue x	0.107	0.157	0.207	
		Blue y	0.003	0.053	0.103	
		White x	0.260	0.310	0.360	
		White y	0.280	0.330	0.380	
Color Gamut	%		-	72	-	


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)


Aperture 1" with 50cm viewing distance

Test Point Center

Environment < 1 lux

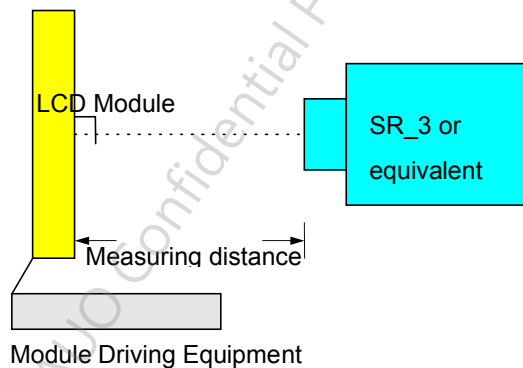

Note 2: Definition of 5 points position (Display active area: 245.76mm (H) x 184.32mm (V))

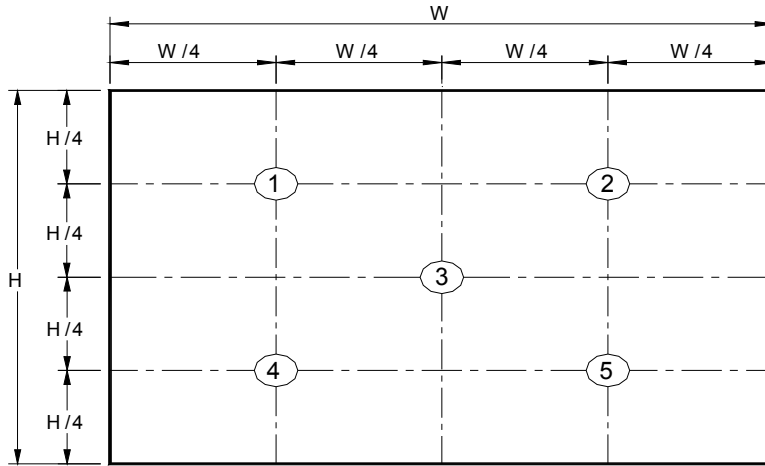

Note 3: The luminance uniformity of 5 points is defined by dividing the minimum luminance values by the maximum test point luminance


$$\delta_{w9} = \frac{\text{Minimum Brightness of five points}}{\text{Maximum Brightness of five points}}$$

Note 4: Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 5: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

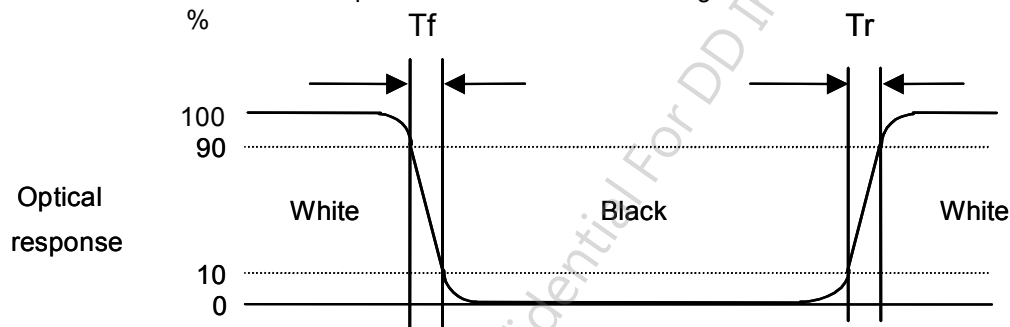

Note 6: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired


measurement viewing angle.

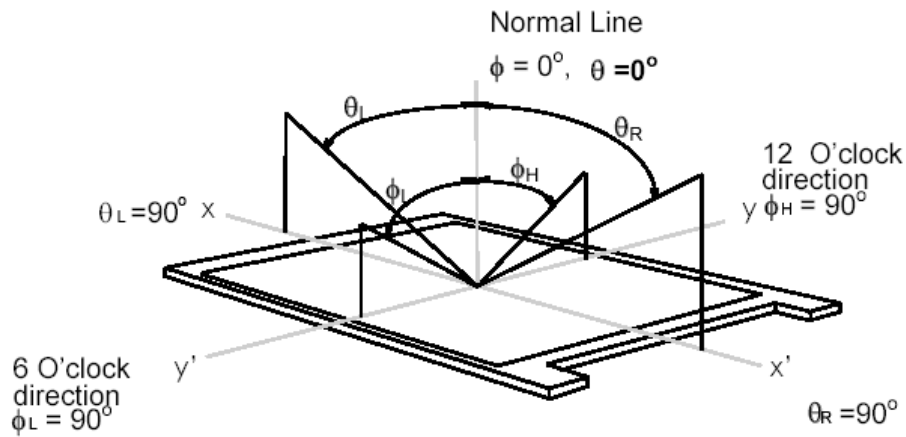

AUO Confidential For DD Internal Use Only On 2016/02/29

3. Functional Block Diagram

The following diagram shows the functional block of the 12.1 inch color TFT/LCD module:

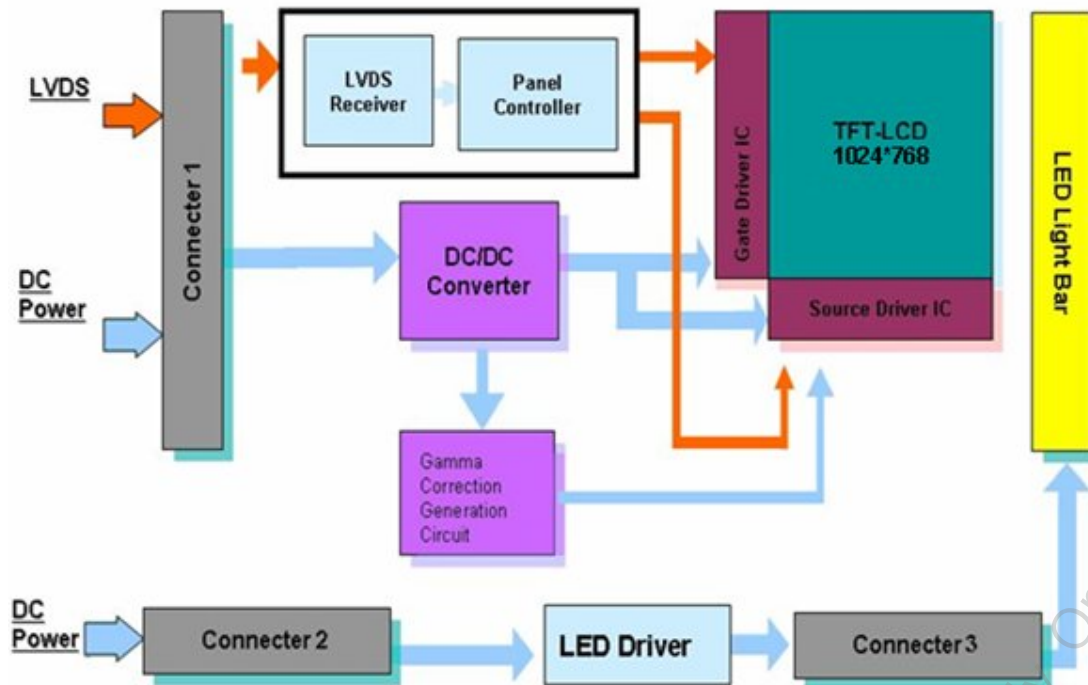

4. Absolute Maximum Ratings


4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit
Logic/LCD Drive Voltage	Vin	-0.3	+3.6	[Volt]

4.2 Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit
Operating Temperature	TOP	-30	+85	[°C]
Operation Humidity	HOP	5	90	[%RH]
Storage Temperature	TST	-30	+85	[°C]
Storage Humidity	HST	5	90	[%RH]

Note: Maximum Wet-Bulb should be 39°C and no condensation.

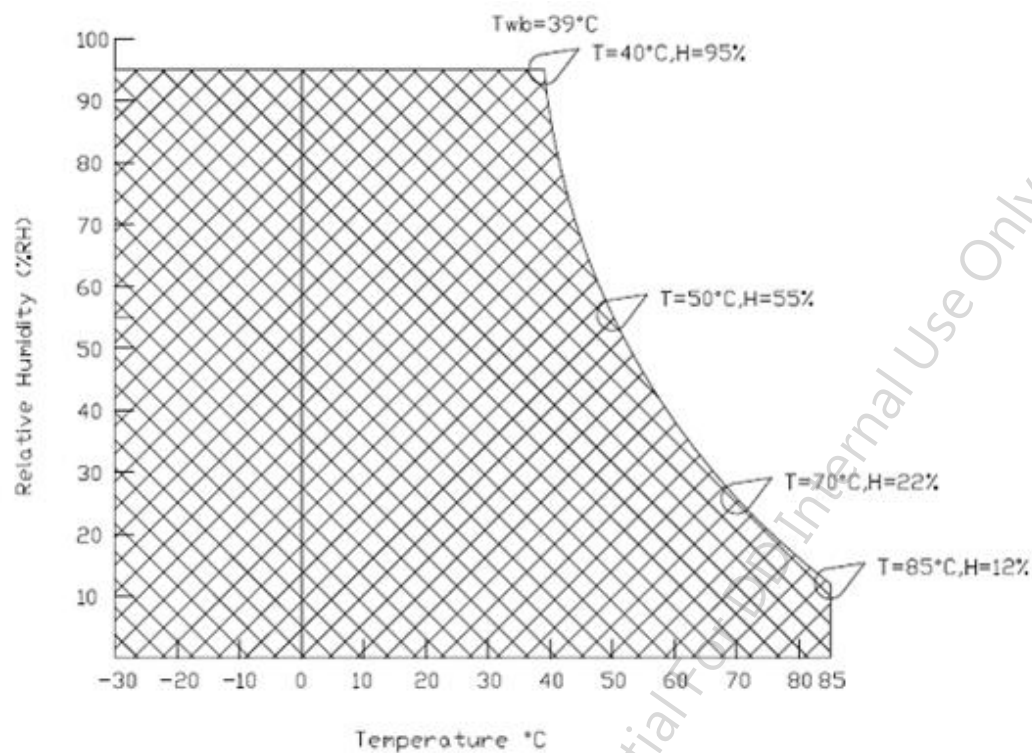



5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Input Voltage	3.0	3.3	3.6	[Volt]	
I _{VDD}	LCD Input Current	-	590	710	[mA]	VDD=3.3V at 60 HZ, all Black Pattern
P _{VDD}	LCD Power consumption	-	1.95	2.34	[Watt]	VDD=3.3V at 60 HZ, all Black Pattern
I _{rush LCD}	LCD Inrush Current	-		3	[A]	Note 1; VDD=3.3V Black Pattern, Rising time=470us
VDD _{rp}	Allowable Logic/LCD Drive Ripple Voltage	-	-	100	[mV] p-p	VDD=3.3V at 60 HZ, all Black Pattern

Note 1: Measurement condition:

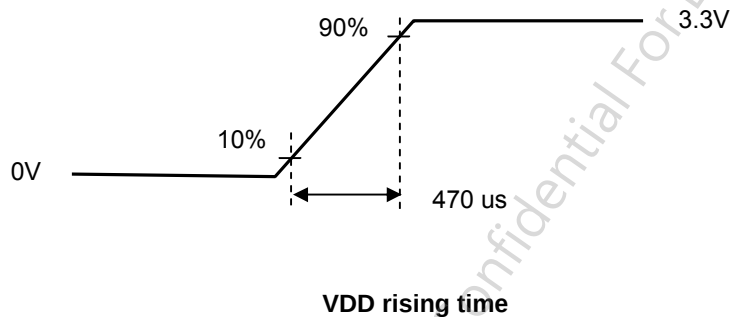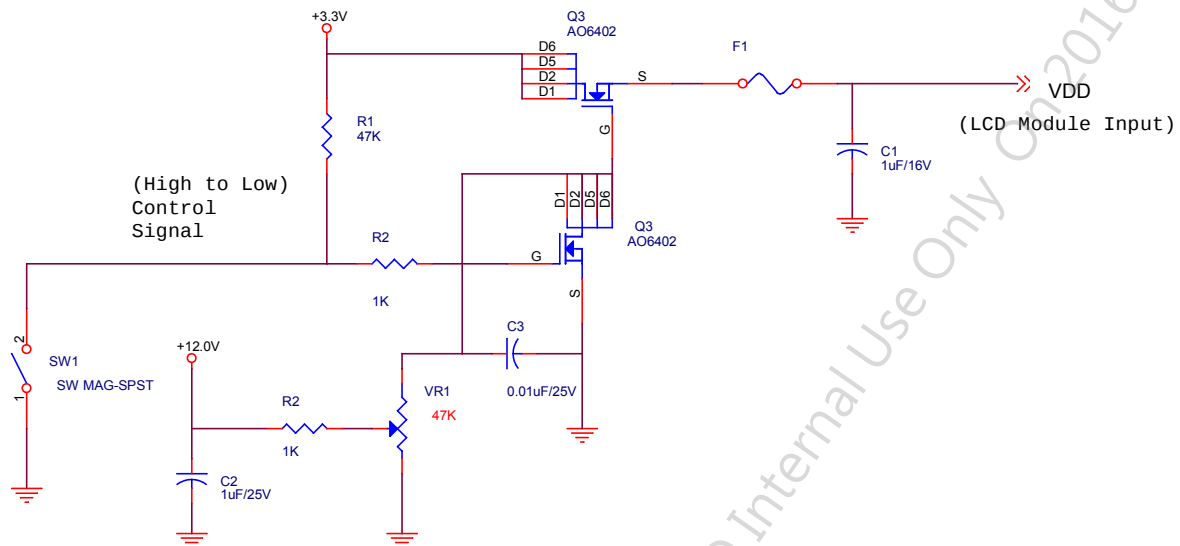


5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.


Symbol	Item	Min.	Typ.	Max.	Unit	Remark
VTH	Differential Input High Threshold	-	-	100	[mV]	VCM=1.2V
VTL	Differential Input Low Threshold	100	-	-	[mV]	VCM=1.2V
 VID 	Input Differential Voltage	100	400	600	[mV]	
VICM	Differential Input Common Mode Voltage	1.15	1.2	1.45	[V]	VTH/VTL=+-100mV

Note: LVDS Signal Waveform.

Single-end Signal

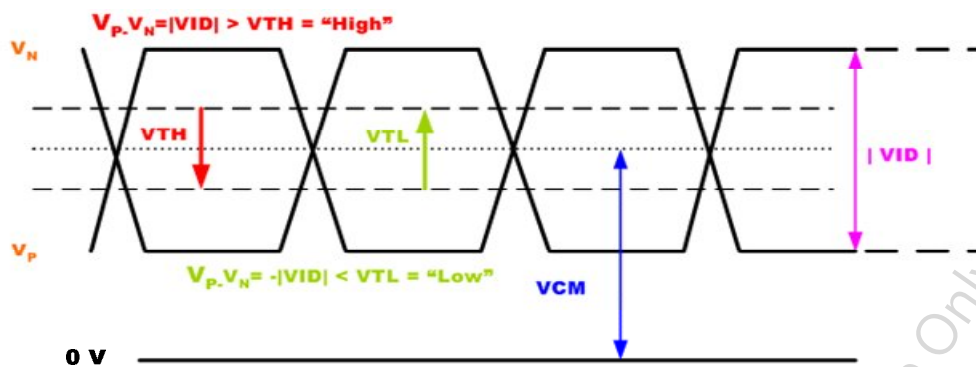

Differential Signal

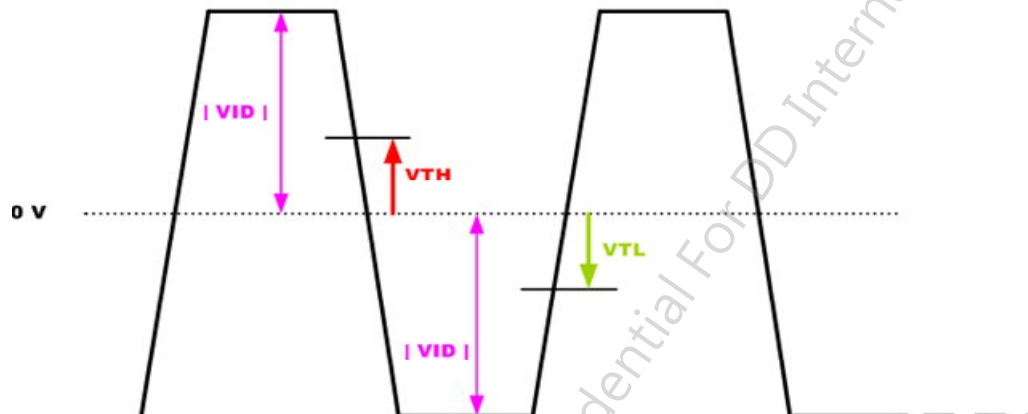

5.2 Backlight Unit

5.2.1 Parameter guideline for LCD

Following characteristics are measured under a stable condition using a inverter at 25℃. (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
VCC	Input Voltage	10.8	12	12.6	[Volt]	
I _{VCC}	Input Current	-	280	-	[mA]	100% PWM Duty Ta= 25°C
P _{VCC}	Power Consumption	-	3.36	4.20	[Watt]	100% PWM Duty Ta= 25°C
F _{PWM}	Dimming Frequency	200	-	20K	[Hz]	
	Swing Voltage	3	3.3	5.5	[Volt]	
	Dimming duty cycle	5	-	100	%	
I _F	LED Forward Current	-	50	-	[mA]	Ta = 25°C
V _F	LED Forward Voltage	-		21.6	[Volt]	I _F =50mA, Ta = -30°C
		-	(19.2)		[Volt]	I _F =50mA, Ta = 25°C
		-			[Volt]	I _F =50mA, Ta = 85°C
P _{LED}	LED Power Consumption	-	2.88	3.24	[Watt]	I _F =50mA, Ta = 25°C
Operation Life		50,000	-	-	Hrs	I _F =50mA, Ta= 25°C

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VCC, I_{VCC}, I_{rush LED}, P_{VCC} are defined for LED backlight.(100% duty of PWM dimming)

Note 3: I_F, V_F are defined for one channel LED. There are three LED channel in back light unit.


Note 4: If G121XTN01.0 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 5: Operating life means brightness goes down to 50% initial brightness. Minimum operating life time is estimated data.

6. Signal Characteristics

6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

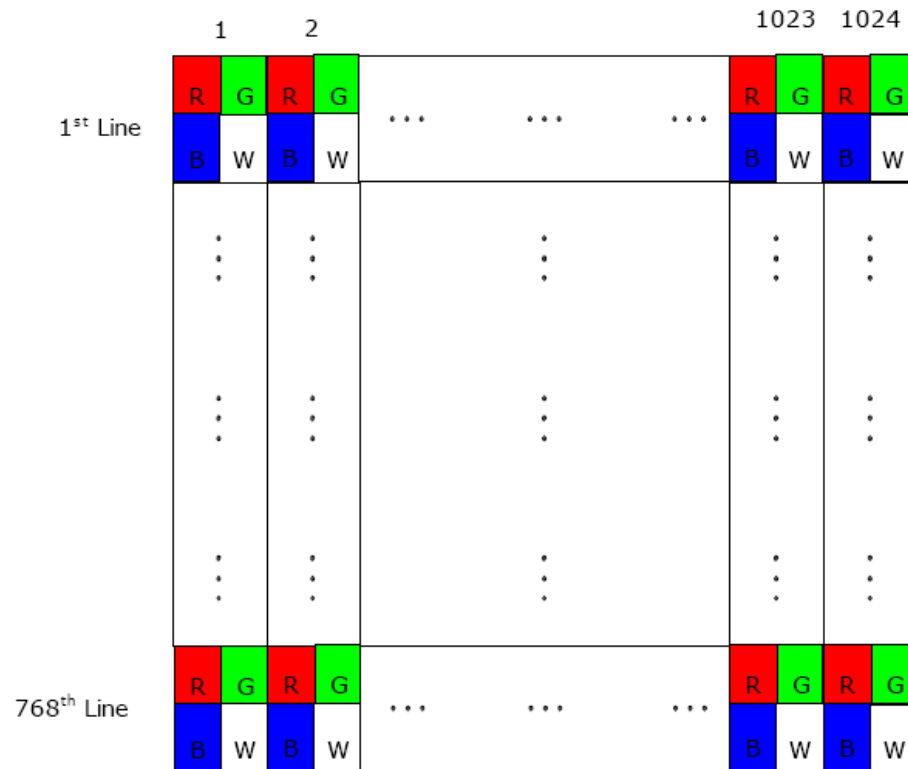

6.2 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.




Fig. 1 Normal scan (Pin19, RSV = Low or NC)




Fig. 2 Reverse scan (Pin19, RSV = High or VDD)

6.3 TFT-LCD Interface Signal Description

The module using a LVDS receiver embaded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and a high-speed data transfer device.

Input Signal Interface		
Pin No.	Symbol	Description
1	VDD	Power Supply, 3.3V (typical)
2	VDD	Power Supply, 3.3V (typical)
3	GND	Ground
4	SEL68	6/ 8bits LVDS data input selection [H: 8bits L/NC: 6bit] *Note4
5	RIN0-	LVDS receiver signal channel 0
6	RIN0+	
7	GND	Ground
8	RIN1-	LVDS receiver signal channel 1
9	RIN1+	
10	GND	Ground
11	RIN2-	LVDS receiver signal channel 2
12	RIN2+	
13	GND	Ground
14	CLKIN-	LVDS receiver signal clock
15	CLKIN+	
16	GND	Ground
17	RIN3-	LVDS receiver signal channel 3
18	RIN3+	
19	RSV	Reverse Scan Function [H: Enable; L/NC: Disable]
20	NC/GND	Reserved for AUO internal test. Please treat it as NC.


Note 1: Input Signals shall be in low status when VDD is off.

Note 2: High stands for "3.3V", Low stands for "0V", NC stands for "No Connection".

Note 3: RSV stands for "Reserved".

Note 4: Input signals shall be in low status when VDD is off.


Note 5:

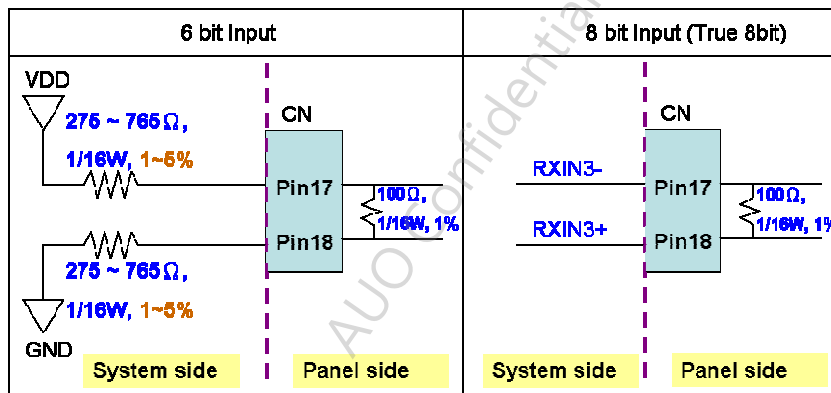


6.4 The Input Data Format

6.4.1 SEL68

SEL68 = "Low" or "NC" for 6 bits LVDS Input

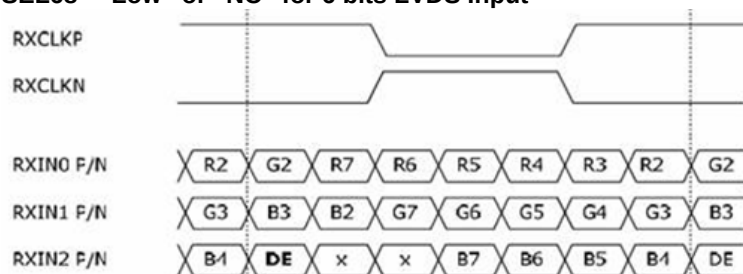

SEL68 = "High" for 8 bits LVDS Input

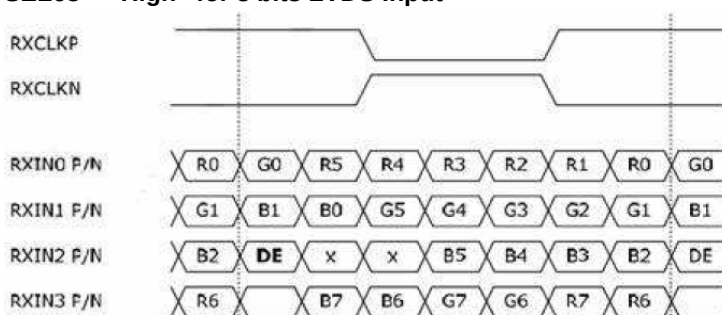

Note1: Please follow PSWG.

Note2: R/G/B data 7:MSB, R/G/B data 0:LSB

Signal Name	Description	
+RED5(R5) +RED4(R4) +RED3(R3) +RED2(R2) +RED1(R1) +RED0(R0)	Red Data 5 (MSB) Red Data 4 Red Data 3 Red Data 2 Red Data 1 Red Data 0 (LSB) Red-pixel Data	Red-pixel Data Each red pixel's brightness data consists of these 6 bits pixel data.
+GREEN5(G5) +GREEN4(G4) +GREEN3(G3) +GREEN2(G2) +GREEN1(G1) +GREEN0(G0)	Green Data 5 (MSB) Green Data 4 Green Data 3 Green Data 2 Green Data 1 Green Data 0 (LSB) Green-pixel Data	Green-pixel Data Each green pixel's brightness data consists of these 6 bits pixel data.
+BLUE5(B5) +BLUE4(B4) +BLUE3(B3) +BLUE2(B2) +BLUE1(B1) +BLUE0(B0)	Blue Data 5 (MSB) Blue Data 4 Blue Data 3 Blue Data 2 Blue Data 1 Blue Data 0 (LSB) Blue-pixel Data	Blue-pixel Data Each blue pixel's brightness data consists of these 6 bits pixel data.
CLK	Data Clock	The typical frequency is 65MHz. The signal is used to strobe the pixel data and DE signals. All pixel data shall be valid at the falling edge when the DE signal is high.
DE	Display Timing	This signal is strobed at the falling edge of CLK. When the signal is high, the pixel data shall be valid to be displayed.

Note: Output signals from any system shall be low or Hi-Z state when VDD is off.

6.5 TFT-LCD Interface Timing


6.5.1 Timing Characteristics

Signal	Symbol	Min.	Typ.	Max.	Unit
Clock Frequency	$1/T_{\text{Clock}}$	50	65	80	MHz
Vertical Section	Period	T_V	776	806	T_{Line}
	Active	T_{VD}	-	768	
	Blanking	T_{VB}	8	38	
Horizontal Section	Period	T_H	1054	1344	T_{Clock}
	Active	T_{HD}	-	1024	
	Blanking	T_{HB}	40	320	

Note 1: Frame rate is 60 Hz.


Note 2: DE mode.

6.5.2 Input Timing Diagram

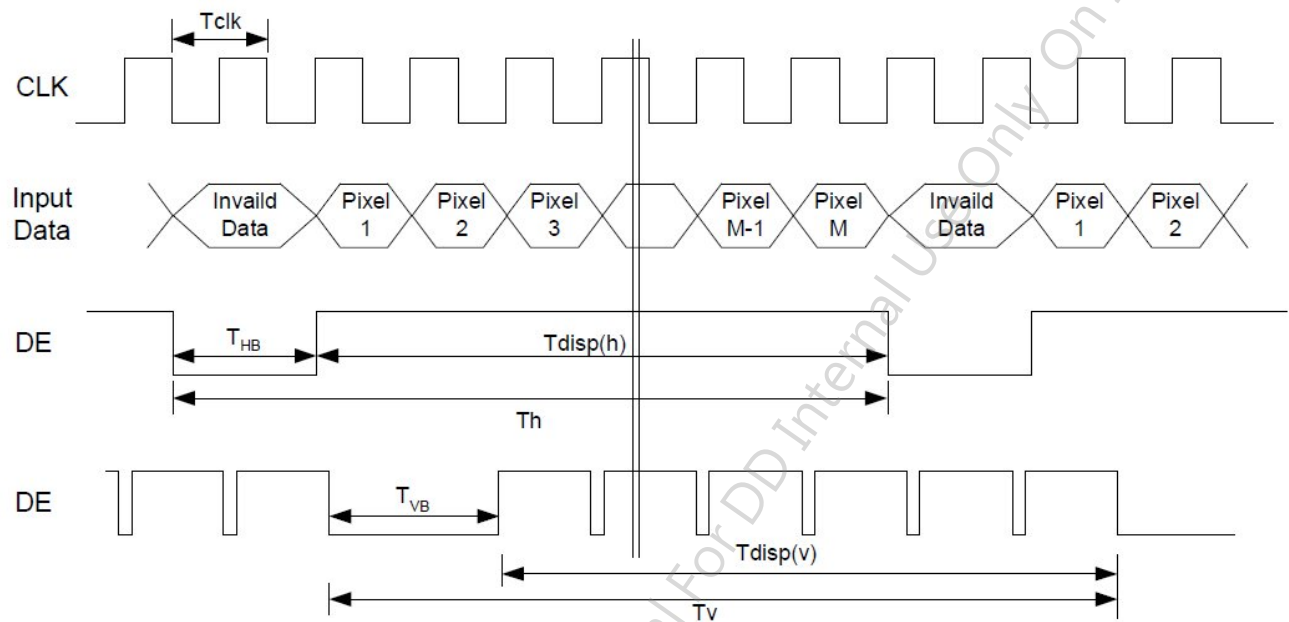

6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

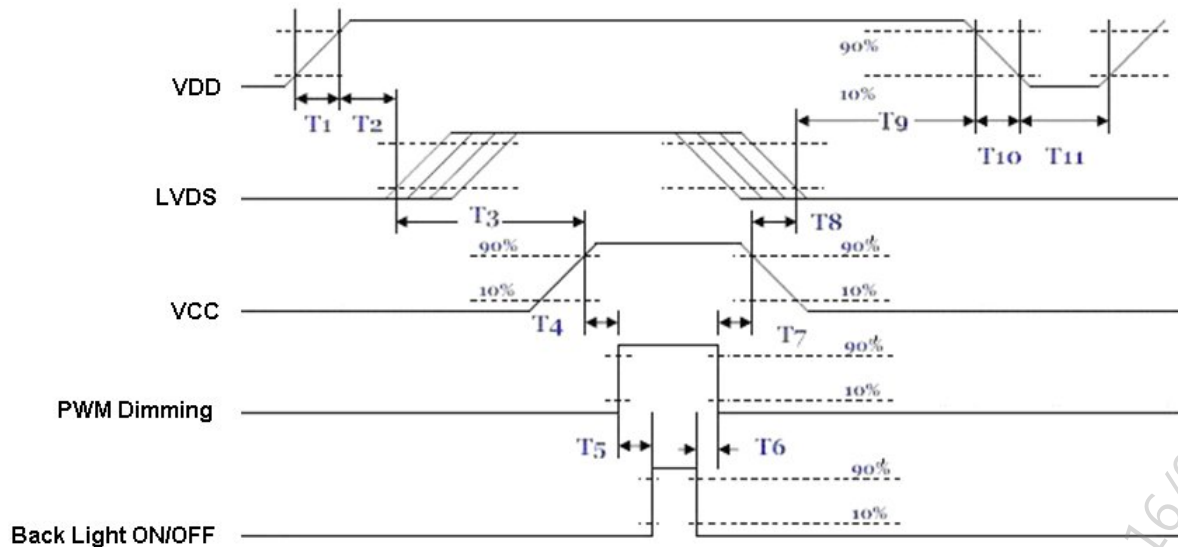

Power ON/OFF sequence timing

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	30	40	50	[ms]
T3	200	-	-	[ms]
T4	10	-	-	[ms]
T5	10	-	-	[ms]
T6	0	-	-	[ms]
T7	10	-	-	[ms]
T8	100	-	-	[ms]
T9	0	16	50	[ms]
T10	-	-	10	[ms]
T11	1000	-	-	[ms]

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.

7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT-LCD Signal (CN1): LCD Connector

Connector Name / Designation	Signal Connector
Manufacturer	STM or compatible
Connector Model Number	MSB240420-E or compatible
Adaptable Plug	P240420 or compatible

Pin No.	Symbol	Pin No.	Symbol
1	VDD	2	VDD
3	GND	4	SEL68
5	RIN0-	6	RIN0+
7	GND	8	RIN1-
9	RIN1+	10	GND
11	RIN2-	12	RIN2+
13	GND	14	CLKIN-
15	CLKIN+	16	GND
17	RIN3-	18	RIN3+
19	RSV	20	NC/GND

7.2 LED Backlight Unit (CN2): Driver Connector

Connector Name / Designation	Lamp Connector
Manufacturer	ENTERY or compatible
Connector Model Number	3808K-F05N-12R or compatible
Mating Model Number	H208K-P05N-02B or compatible

Pin No.	symbol	description
Pin1	VCC	12V input
Pin2	GND	GND
Pin3	ON/OFF	5V/3.3V-ON,0V-OFF
Pin4	Dimming	PWM
Pin5	NA	

7.3 LED Backlight Unit (CN3): Light bar Connector

Connector Name / Designation	Lamp Connector
Manufacturer	ENTERY or compatible
Connector Model Number	H208K-P04N-02B or compatible
Mating Model Number(CN3)	3808K-F04N-02R or compatible

Pin No.	symbol	description	Color
Pin1	H	LED anode	Red
Pin2	L	LED cathode	White
Pin3	L	LED cathode	White
Pin4	L	LED cathode	White

8. Reliability Test Criteria

Items	Required Condition	Note
Temperature Humidity Bias	40 °C, 90%RH, 300 hours	
High Temperature Operation	85 °C, 300 hours	1
Low Temperature Operation	-30 °C, 300 hours	1
Hot Storage	85 °C, 300 hours	1
Cold Storage	-30 °C, 300 hours	1
Thermal Shock Test	-20 °C / 30 min, 60 °C / 30 min, 100cycles, 40 °C minimum ramp rate	
Hot Start Test	85 °C / 1Hr min. power on/off 5 times	
Cold Start Test	-30 °C / 1Hr min. power on/off 5 times	
Shock Test (Non-Operating)	50G, 20ms, Half-sine wave, (±X, ±Y, ±Z)	
Vibration Test (Non-Operating)	1.5G, (10~200Hz, Sine wave) 30 mins/axis, 3 direction (X, Y, Z)	
On/off test	On/10 sec, Off/10 sec, 30,000 cycles	
ESD	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point Air Discharge: ± 15KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point	2
EMI	30-230 MHz, limit 30 dBu V/m, 230-1000 MHz, limit 37 dBu V/m	

Note 1: No Function failure occurs.


Note 2: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost
Self-recoverable. No hardware failures.

Note 3:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.

9.1 LCM Outline Dimension (Front View)


9.2 LCM Outline Dimension (Rear View)

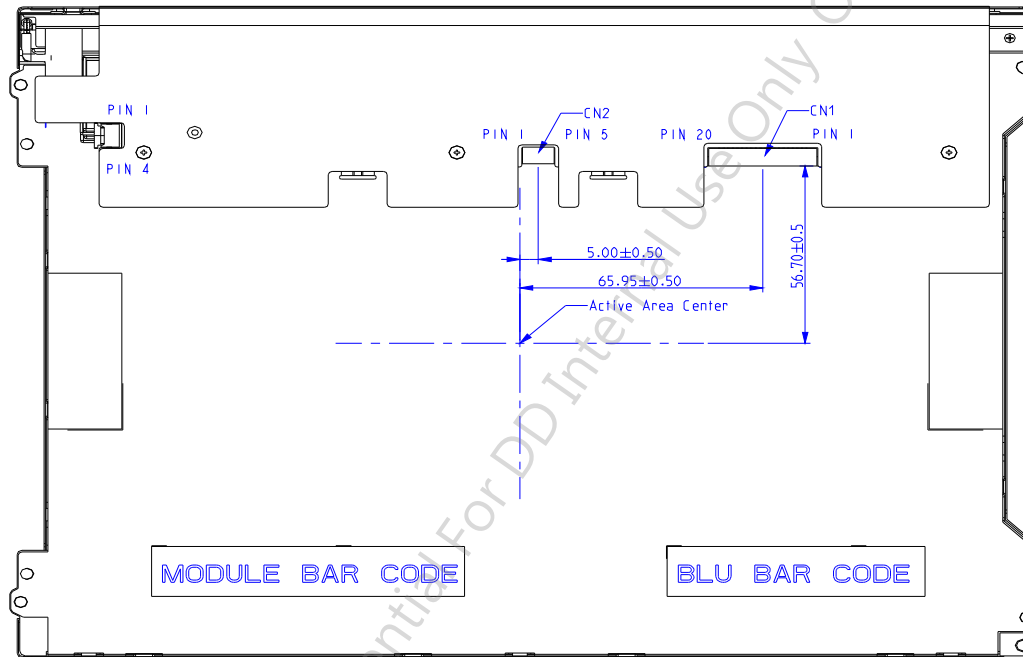


NOTE:
 1. CN1: THE INTERFACE CONNECTOR IS STM MSB240420
 2. CN2: THE LED POWER CONNECTOR IS E&T 3808K-F05N-02R
 3. TOLERANCE IS ±0.5mm IF NOT SPECIFIED.

10. Label and Packaging

10.1 Shipping Label (on the rear side of TFT-LCD display)

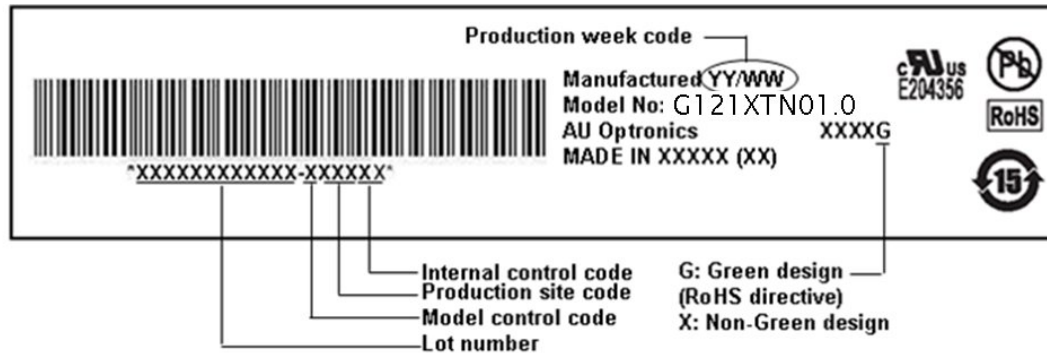

10.2 Carton Package

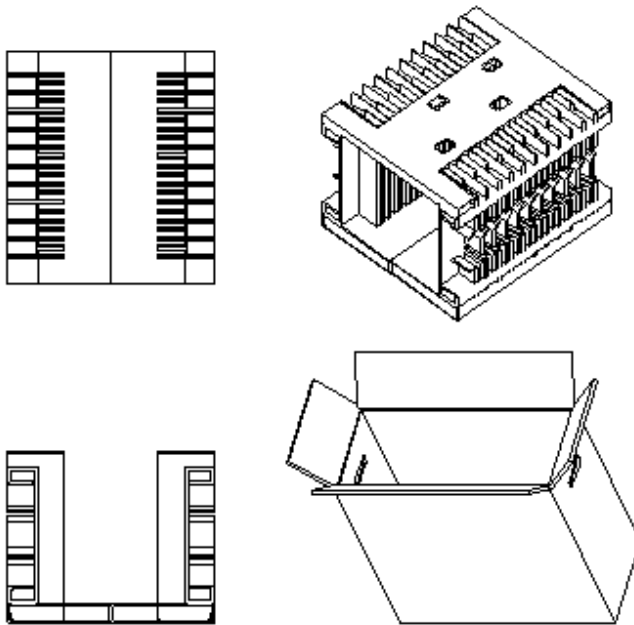

Note:

1. Max. Capacity: 20pcs LCD Modules / per carton
2. Max. Weight: 14.8 kg / per carton
3. The outside dimension of carton is 570(L) mm x 320(W) mm x 420(H) mm

11 Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 National Test Lab Requirement


The display module will satisfy all requirements for compliance to:

UL 1950, First Edition

U.S.A. Information Technology Equipment

AUO Confidential For DD Internal Use Only On 2016/02/29

Our company network supports you worldwide with offices in Germany, Great Britain, Turkey and the USA.
For more information please contact:



DATA DISPLAY GROUP

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom

Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1 Ronkonkoma, NY
11779
United States of America
Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com

Sales Partner:**DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ
İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ**

Barbaros Mh. Ak Zambak Sk. A Blok D:143
34376 Ataşehir / İstanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr