

HOSIDEN CORPORATION

HLM 8619 - 010500 - HIGH GRADE

50K LIFE CCFL TUBE

**PASSIVE MONOCHROME
HIGH GRADE LCD DISPLAY**

320 x 240 DOTS



CONTENTS

- 1. FEATURES**
- 2. ABSOLUTE MAXIMUM RATINGS**
- 3. MECHANICAL CHARACTERISTICS**
- 4. OPTICAL CHARACTERISTICS**
- 5. ELECTRICAL CHARACTERISTICS**
- 6. INTERFACE CONNECTOR**
- 7. BLOCK DIAGRAM**
- 8. INTERFACE TIMING**
- 9. CCFL BACKLIGHT UNIT**
- 10. RELIABILITY**
- 11. LOT NUMBER MARKING**
- 12. HANDLING PRECAUTION**
- 13. TERMS OF WARRANTY**
- 14. DRAWING**

1. FEATURES

Display Format	320 x 240 Dots (Graphic Type)
Display Mode	STN Negative Transmissive type, F-STN Mode with CFL Backlight
Screen Area	121 x 91,6 mm
Contrast Ratio	25:1 (typ.)
Brightness	130 cd/m ² (typ) / If = 5 mA
Driving Method	1/240 duty
Power Supply	+5V (VCC) / -23V (VEE)
Interface	5V CMOS Level
Backlight	CFL edgelight system

2. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Value	Unit	Remark
Supply Voltage (Logic)	VDD -VSS	6 max.	V	
Supply Voltage	VDD-VEE	30 max.	V	
Input Voltage	Vin	$V_{SS} \leq V_{IN} \leq V_{DD}$	V	
Storage Temperature	Tstg	-20 ... 60	°C	
Operating Temperature	Top	0 ... 50	°C	
Extended Operating Temperature	Top	-5 ... 55	°C	Note 1

Note 1 : Maximum temperature range with reduced optical parameters


3. MECHANICAL CHARACTERISTICS

Item	Standard Value	Unit	Remark
Module Size	157,8 x 121,6 x 11,5	mm	Except FFC Cable
Viewing Area	121 x 91,6	mm	
Active Area	115,17 x 86,37	mm	
Dot Size	0,33 x 0,33	mm	
Dot Pitch	0,36 x 0,36	mm	
Weight	230 (typ.)	grams	

4. OPTICAL CHARACTERISTICS


Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
Response Time	Rise T_r	$T_a=25^{\circ}\text{C}$ $\theta=0^{\circ}, \phi=0^{\circ}$	-	200	260	ms	Note 1
	Fall T_d		-	150	200	ms	Note3
Contrast Ratio	CR	$T_a=25^{\circ}\text{C}, \theta=0^{\circ}, \phi=0^{\circ}$	-	25	-		Note2,3
Viewing Angle	$\theta_1 + \theta_2$	$T_a=25^{\circ}\text{C}, \phi=0^{\circ}, \text{CR} \geq 1,4$	40	55	-	deg	Note 3
Frame Frequency			65	70	75	Hz	
Brightness		$I_f = 5 \text{ mA}$	130			cd/m^2	
Viewing Direction				6:00		o'clock	

NOTE 1 : Definition of optical response time

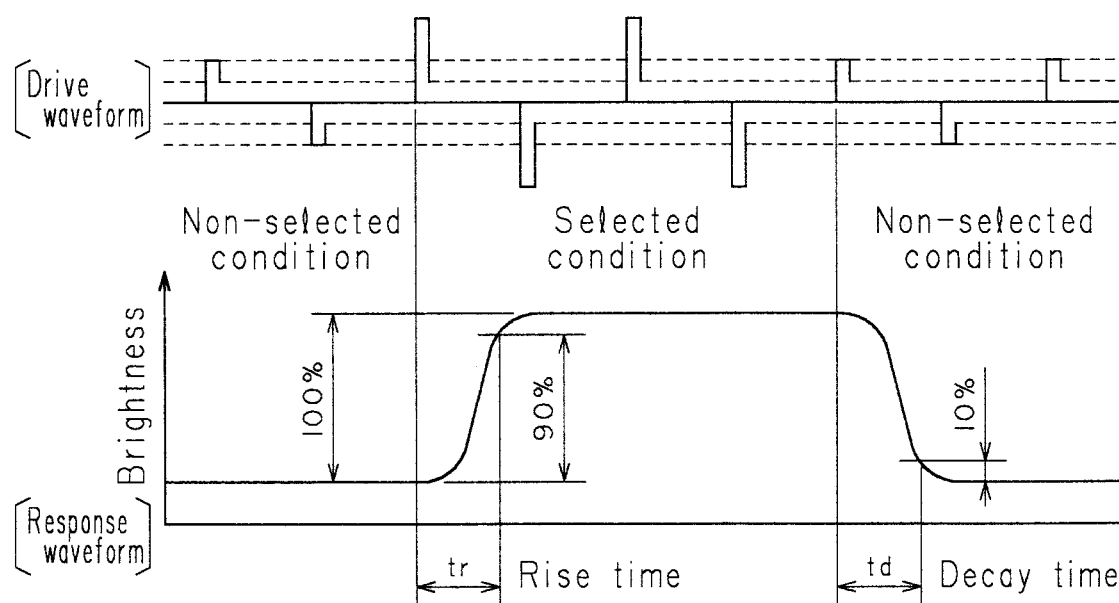


NOTE 2 : Definition of contrast ratio CR

Definition
$$CR = \frac{\text{Brightness in selected segment (B1)}}{\text{Brightness in non-selected segment (B2)}}$$

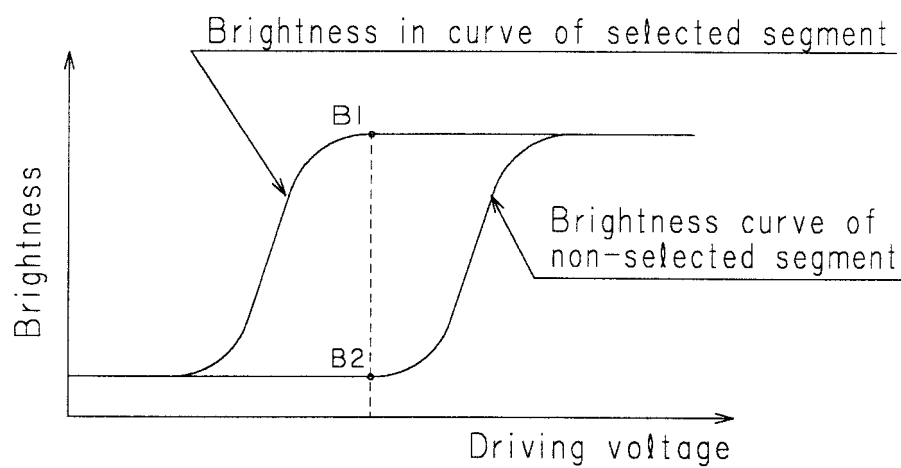

NOTE 3 : Definition of viewing direction θ and ϕ

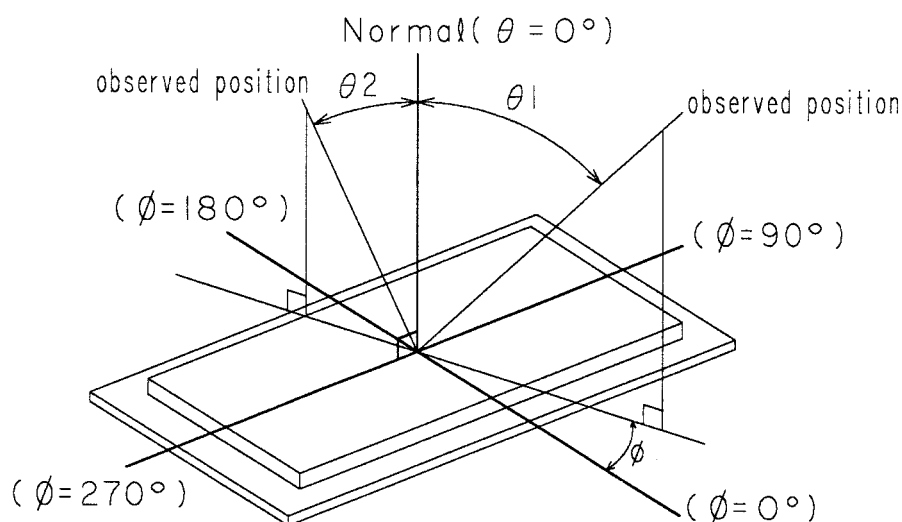

5. ELECTRICAL CHARACTERISTICS (LCD)

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage (Logic)	V _{DD}	V _{DD} ± 10%	4,5	5	5,5	V
Supply Voltage (LCD)	V _{DD-V_O}	θ=0°, φ=0° Ta=0°C	-	24,5	-	V
		θ=0°, φ=0° Ta=25°C	-	23,3	-	V
		θ=0°, φ=0° Ta=50°C	-	22,6	-	V
Supply current (Logic)	I _{DD}	V _{DD} =5V, V _O =-18,3V		3,9	11	mA
Supply Current (LCD)	I _{EE}	Frame Signal = 70Hz	-	2,6	9	mA

6. INTERFACE CABLE

1 mm pitch FFC Cable is fixed on the display.


Suitable Interface to standard 2,54 connector : IF155 (Data Display)

Suitable connectors for through hole (90/180°) or surface mount (90°) are available on request


Pin No.	Signal Name	Function
1	V _O	Control for LCD drive voltage
2	V _{EE}	Power supply voltage for LCD drive
3	D3	Display Data 3
4	D2	Display Data 2
5	D1	Display Data 1
6	D0	Display Data 0
7	NC / M	LCD drive signal (AC signal) *1
8	V _{SS}	Ground
9	V _{DD}	+5V Logic Supply Voltage
10	CP2	Display Data Shift Clock
11	CP1	Display Data Latch Clock
12	S	Frame Signal (Sync. of display)
13	DISP OFF	Display ON (H) / OFF (L)
14	F.G.	Frame Ground

*1 Note : M is generated on board or supplied externally (see block diagram)
Default setting is internal generation (no external signal necessary)

8. INTERFACE TIMING

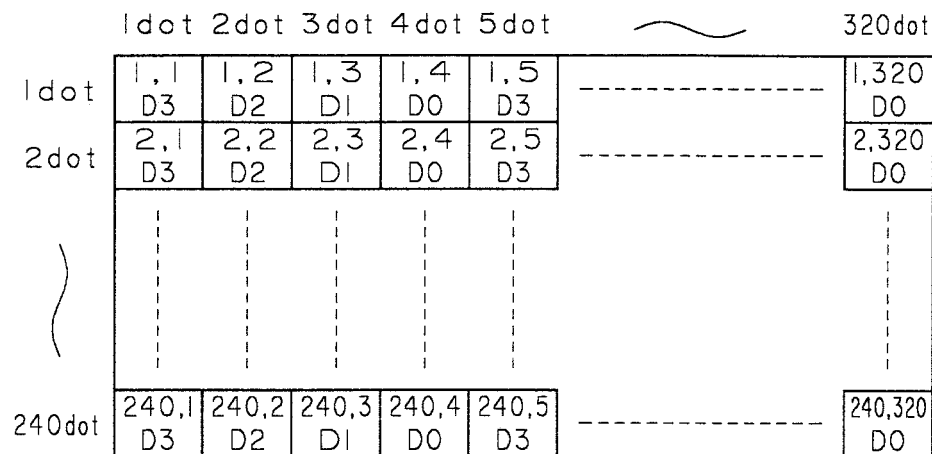


(DATA MAP)

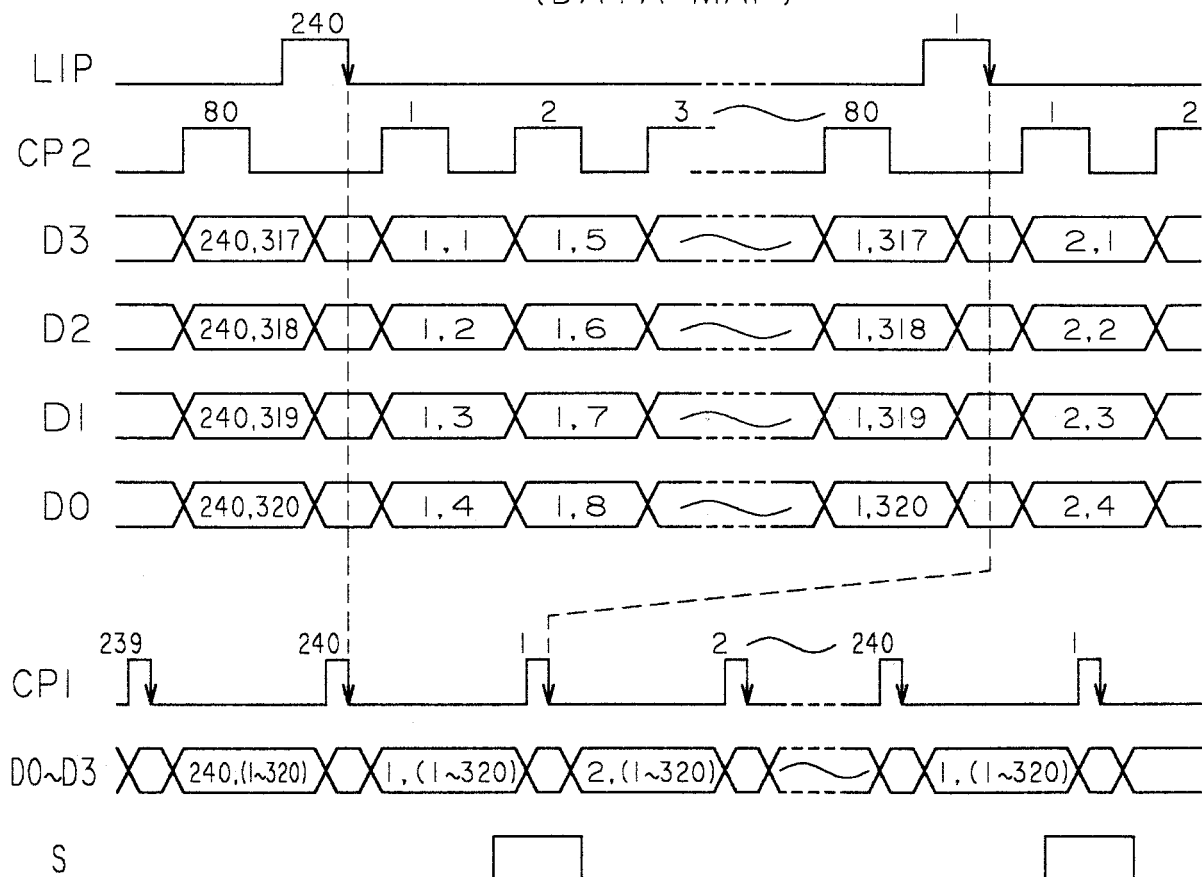

8-1 TIMING CHART

	Symbol	Condition	Min	Typ	Max	Unit
CLP Frequency	f_{CP}	Duty=50%	3,4	-	-	MHz
CLP Pulse Width	t_{CW}	-	100	-	-	ns
CLP Rise / Fall Time	t_r, t_f	-	-	-	50	ns
Data Setup Time	t_{DSU}	-	50	-	-	ns
Data Hold Time	t_{DHD}	-	80	-	-	ns
CLP Setup Time	t_{ESUI}	-	90	-	-	ns
LIP -> CLP Time	t_{LC}	-	200	-	-	ns
LIP Pulse Width	t_{lw}	-	100	-	-	ns
FRP Setup Time	t_{fsu}	-	100	-	-	ns
FRP Hold Time	t_{fhd}	-	100	-	-	ns

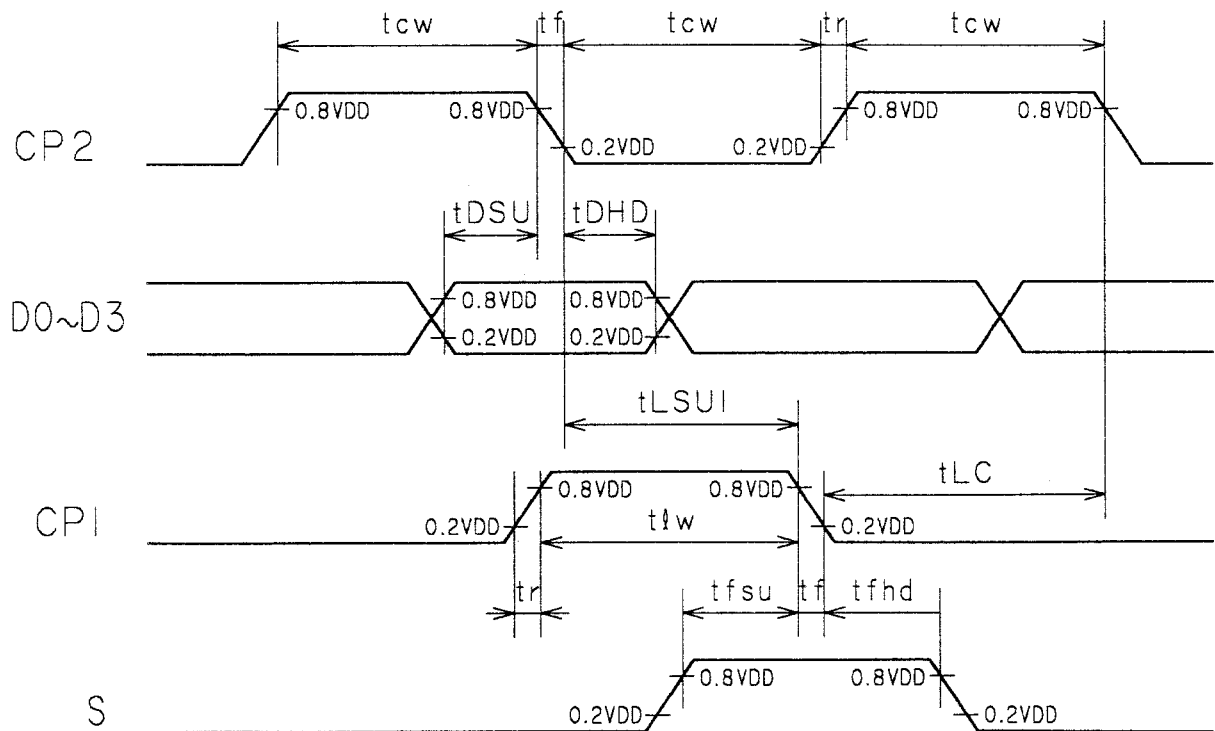

9. CFL UNIT

9-1 CCFL Lamp

Item	Symbol	Value	Unit
Discharging Tube current	(IL)	5	mA
Discharging Tube voltage	(VL)	295	Vrms
Starting Tube Voltage	(VS)	1050	Vrms
Brightness (Tube)	(B)	32.500	Nit
Tube diameter	Ø	3	mm
Tube length	l	86	mm
Half Brightness Time	min	30.000	h
Half Brightness Time	typ	50.000	h

The definition of half brightness time is either average brightness decreased to 50% of initial average brightness value (@ 5mA, 25°C).

9-2 Example of Inverter

Inverter : TDK TAD170 (5V) or 8m8619 (5V or 12V)
 Input current : 0,2A
 Output current : 5,0 mArms
 Drive frequency : 30 kHz (typ)

9-3 Interface connector

Used connector : IL-G-4S-S3C2 (*1)
 Manufacturer : JAE

Pin No.	Signal Name	Function
1	HV	High Voltage
2	NC	Not connected
3	NC	Not connected
4	GND	Ground

*1 Suitable through hole connectors (90°/180°) are available on request.

10. UNIFORMITY CHARACTERISTICS

10-1 Standard Value

Non-uniformity = $\left| \frac{\text{Max. Value} - \text{Mean Value}}{\text{Mean Value}} \right| \times 100 \leq 30\%$

Non-uniformity = $\left| \frac{\text{Min. Value} - \text{Mean Value}}{\text{Mean Value}} \right| \times 100 \leq 30\%$

Max. Value : Maximum Contrast

Mean Value : Mean Contrast

Min. Value : Minimum Contrast

: Absolute Value

10-2 Measurement conditions

Contrast is measured at 9 locations and the mean contrast is calculated. (Point A ... I)


CCFL Backlight power-on time : 10 minutes

Discharging Tube Current (IL) : 5 mA

Temperature : 25°C

VDD - VO : 23.3 V


Measurement diameter : 8 mm

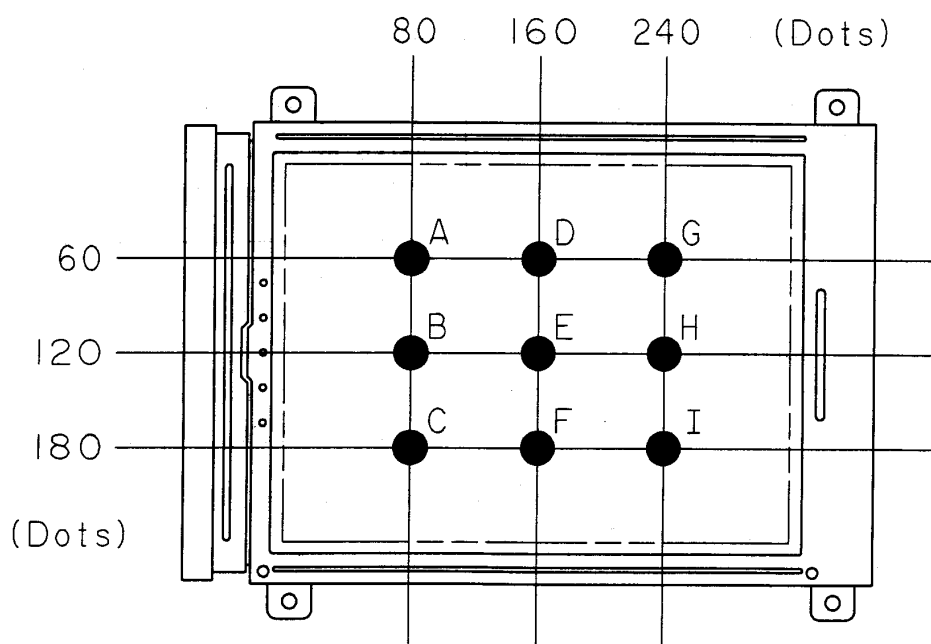

10. RELIABILITY

Item	Condition
High temperature storage	60°C 120h
Low temperature storage	-20°C 120h
Damp heat storage	40°C / 90% RH 120h
Thermal cycles	5 cycles see below diagram
Vibration	Total amplitude : 1,5 mm Frequency : 10 .. 55 .. 10 Hz Tested at above condition for X,Y,Z directions 60 min. each

Temperature Cycle Diagram

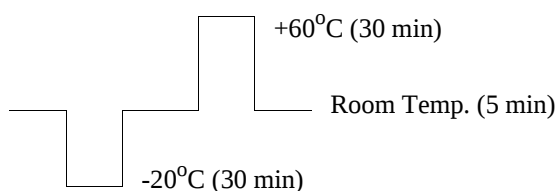

10-1 Evaluation Criteria


Every test item should meet the following criteria :

- All of the segments (dots) should be not blurred
- All segments (dots) should be usually displayed

Judgements should be made after exposure in room temperature condition for 4 hours.

11. LOT MARKING

The manufacturing lot number is marked on each module

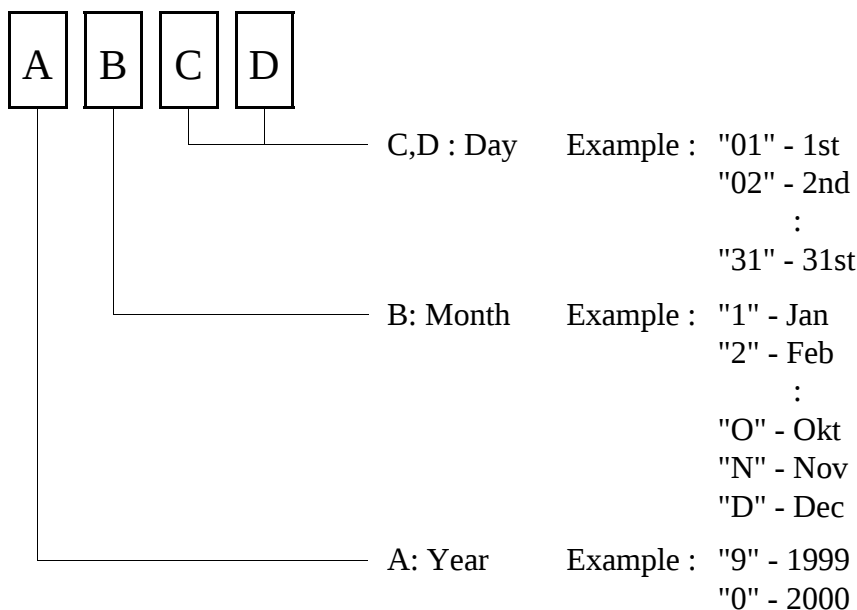

12. HANDLING PRECAUTION

1. Do not disassemble the module
2. Since the LCD cell is made of glass, do not apply strong mechanical impact or static load onto it. Handle with care, and do not twist or bend the LCD module.
3. In case the LCD cell is broken, do not sip or drink leaked liquid crystal material. If the liquid crystal material touched your skin, wash it out with soap immediately.
4. Store and use within ratings in order to keep performance and prevent damage.
5. Do not drop water or any chemicals onto the display surface.
6. Handle the polarizers with care as it maybe easily scratched. Do not press or rub them with any hard object.
7. Do not apply high electrostatic voltage to the LCD module. It may damage CMOS / LSI circuit in the LCD module. Ground yourself when you touch the LCD module directly.
8. When you handle the LCD module for incoming inspection or assembly, use soft fingerstalls or gloves in order to keep the display quality.
9. Do not pull or fold the CCFL cable

13. TERMS OF WARRANTY

13-1 Incoming Inspection

Incoming inspection by the customer shall be performed within thirty (30) days from the shipping date.

13-2 Warranty Period

HOSIDEN warrants the LCD modules for a period of 6 months from the shipping date when stored or used under normal conditions.

14. DRAWING

See following page.

If a more detailed drawing is necessary please contact HOSIDEN or its representatives.

The information given in this document is carefully checked and believed to be reliable.
HOSIDEN reserves the right to make changes in product or specification at any time and without further notice.
HOSIDEN products are not intended for use in systems in which failures of product could result in personal injury.
All mentioned trademarks are registered trademarks of their owner.

SPECIFICATIONS

TITLE : 320x240 MONO STN DISPLAY

NUMBER : HLM8619-010500 REV.A PAGE 14

