SPEC.NO.	TQ3C-8EACO-E1CWC15-01
DATE	April 23,2001

SPEC

F 0	R	•		
			 	_

TYPE: KCS057QV1AJ-G23

CONTENTS

- 1. Application
- 2. Construction and Outline
- 3. Mechanical Specifications
- 4. Absolute Maximum Ratings
- 5. Electrical Characteristics
- 6. Optical Characteristics
- 7. Circuit Block Diagram
- 8. Interface Signals
- 9. Interface Timing Chart
- 10. Data and Screen
- 11. Input Timing Characteristics
- 12. Supply Voltage Sequence Condition
- 13. Backlight Characteristics
- 14. Lot Number Identification
- 15. Warranty
- 16. Precautions for Use
- 17. Reliability Data / Environmental Test
- 18. Outline Drawing

Issued

Date: MAY. 07.2001



Hayato LCD Division

KYOCERA CORPORATION KAGOSHIMA HAYATO PLANT LCD DIVISION

This specification is subject to change without notice. Consult Kyocera before ordering.

Original	Designed by	:Engineering	Confirmed by	:QA Dept.	
Issue Data	Prepared	Checked	Approved	Checked	Approved
August 10,2000	T. Yamagudhi	4. Matseumoto	T. minami	SHAYANAN	J Joele ta

Caution

- 1. This Kyocera LCD module has been specifically designed for use only in electronic devices in the areas of audio control, office automation, industrial control, home appliances, etc. The modules should not be used in medical applications where module failure could result in physical harm or loss of life, and Kyocera expressly disclaims any and all liability relating in any way to the use of the module in such medical applications.
- 2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, losses, damages, liabilities, awards, costs, and expenses, including legal fees, resulting from or arising out of Customer's use, or sale for use, of Kyocera modules in medical applications.
- 3. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Revision Record

		Design	gned by: Engineering Dept. Confirmed by: QA			by: Engineering Dept. Confirmed by: QA Dept.				
Date	Date Prepar			Checked	Approved	Checked	Approved			
April 23	April 23,2001 T. Yamasuch					SHAMARKI	y yoshida			
Rev. No.	Date		Page	4. Motrumso	<u>T. <i>Trònamù</i></u> Descriptio	ons	11 11 00-0 44			
0 0	August		_	Change SPEC N "TQ3C-8EACO Change ALL.		"→"TQ3C-8EACO-	E1CWC15-00"			
0 1	April 2	3,2001		ALL PAGE. ~Change un	it					
;										
			E							

1. Application

This data sheet defines the specification for a $(320 \times R.G.B) \times 240$ dot, STN Transmissive color dot matrix type Liquid Crystal Display with CFL backlight.

2. Construction and Outline

 $(320 \times R. G. B) \times 240$ dots, COB type LCD with CFL backlight.

Backlight system : Side-edge type CFL (1 tube).


Inverter : Option.

Recommended Inverter: PH-BLC08-K3 (HITACHI MEDIA ELECTRONICS)

or equivalent.

Polarizer : Glare treatment.

Additional circuit : Bias voltage circuit, Randomizing circuit.

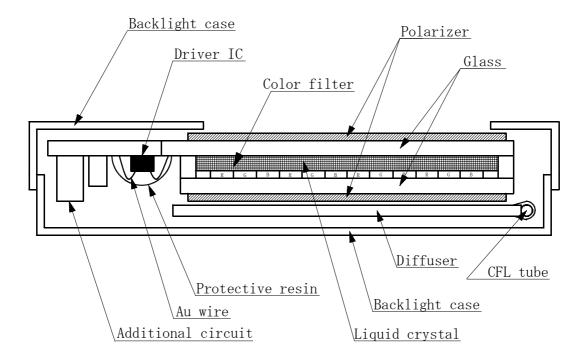

This drawing is showing conception only.

3. Mechanical Specifications

ITEM	SPECIFICATION	UNIT
Outline dimensions	154.6 (W) × 114.8 (H) × 8.5 (D)	mm
Effective viewing area	118.18 (W) × 89.38 (H)	mm
Dot number	(320×R. G. B) (W) × 240 (H)	Dots
Dot size	0.10 (W) × 0.34 (H)	mm
Dot pitch	0.12 (W) × 0.36 (H)	mm
Display color *1	White *2	_
Base color *1	Black *2	_
Mass	200	g

- *1 Due to the characteristics of the LC material, the color vary with environmental temperature.

*2 Negative-type display
Display data "H" :R,G,B Dots ON : White
Display data "L" :R,G,B Dots OFF : Black

4. Absolute Maximum Ratings

4-1. Electrical absolute maximum ratings

ITEM	SYMBOL	MIN.	MAX.	UNIT
Supply voltage for logic	VDD	0	7. 0	V
Supply voltage for LCD driving	VEE	0	33. 0	V
Input signal voltage *1	Vin	0	VDD	V

*1 Input signal :CP, LOAD, FRM, DISP, DO~D7

4-2. Environmental absolute maximum ratings

ITEM		SYMBOL	MIN	MAX	UNIT
Operating temperature	*1	Тор	0	60	$^{\circ}\! \mathbb{C}$
Storage temperature	*2	Тѕто	-20	60	$^{\circ}\!\mathrm{C}$
Operating humidity	*3	Нор	10	*4	%RH
Storage humidity	*3	Нѕто	10	*4	%RH
Vibration		_	*5	*5	_
Shock		_	*6	*6	_

- *1 LCD's display quality shall not be guaranteed at the temperature range of : below 0°C and upper 40°C.
- *2 Temp. = -20° C < 48 h , Temp = 60° C < 168 h Store LCD panel at normal temperature/humidity. Keep it free from vibration and shock.

LCD panel that is kept at low or high temperature for a long time can be defective due to the other conditions, even if the temperature satisfies standard.

- *3 Non-condensation.
- *4 Temp. $\leq 40\%$, 85% RH Max. Temp. > 40%, Absolute Humidity shall be less than 85%RH at 40%.

* 5	_	Т	
	Frequency	10∼55 Hz	Converted to acceleration value:
	Vibration width	0.15 mm	$(0.3 \sim 9 \text{ m/s}^2)$
	Interval	10-55-10 Hz	1 minute

2 hours in each direction $\,$ X/Y/Z (6 hours as total) EIAJ ED-2531

*6 Acceleration: 490m/s^2 Pulse width: 11 ms

3 times in each direction : $\pm X/\pm Y/\pm Z$.

EIAJ ED-2531


5. Electrical Characteristics

Temp. = 25° C, V	IDD = +5.0	$v \pm v$	5%
---------------------------	------------	-----------	----

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply voltage for logic	VDD	_	4. 75	5. 00	5. 25	V
LCD driving voltage *1	Vop=	0 ℃	25. 4	26. 4	27.4	V
	VEE	25 ℃	24. 4	25. 4	26. 4	V
		60 ℃	22. 6	23.6	24.6	V
Input voltage	Vin	"H" level	0.8VDD		VDD	V
		"L" level	0		0. 2VDD	V
Clock frequency	f cp		2. 02	2. 16	16.0	MHz
Frame frequency *2	f frm		70	75	_	Hz
Current consumption for logic	IDD			3.0	4. 5	mA
Current consumption for LCD driving	IEE	*3	_	7.5	11.3	mA
Power consumption	Pdisp		_	210	325	mW

- *1 Maximum contrast ratio is obtained by adjusting the LCD supply voltage (Vop= VEE) for driving LCD.
- *2 In consideration of display quality, it is recommended that frame frequency is set in the range of 70-80Hz. When you have to use higher frame and clock frequencies, confirm the LCD's performan—ce and quality prior to finalizing the frequency values:

 Generally, as frame and clock frequencies become higher current consumption will get bigger and display quality will be degraded.
- *3 Display high frequency pattern, (see below). VDD = 5.0V , Vop = VEE , f $_{\rm FRM}$ = 75 Hz , fcp = 2.16MHz Pattern:



6. Optical Characteristics


Temp. = 25° C

ITEM SYMBO		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Response	Rise	Tr	$\theta = \phi = 0^{\circ}$		_	220	320	ms
time	Down	Td	$\theta = q$	<i>P</i> =0 ₀	_	110	210	ms
Viewing ang	le range	θ	CR≧2	$\phi = 0^{\circ}$	-30	_	30	deg.
		φ	CR≦2	$\theta = 0^{\circ}$	-50	_	50	deg.
Contrast	ratio	CR	$\theta = q$	P =0°	20.0	40.0	_	_
Brightness(]	[L=5. OmA)	L	-	_	140	200	_	$\mathrm{cd/m^2}$
Chromaticity coordinates	Red	X	$\theta = 0$	0°	0. 50	0. 55	0.60	
coordinates		У	$\theta - \zeta$) - U	0.30	0.35	0.40	
	Green	X	0 -	5 =0°	0. 26	0.31	0.36	
		У	$\theta - \zeta$) - U	0. 47	0. 52	0. 57	
	Blue	X	$\theta = 0$. - 0°	0. 11	0. 16	0. 21	
		У	$\theta - \zeta$) - U	0. 12	0. 17	0. 22	_
	White	X	$\theta = \phi = 0^{\circ}$		0. 27	0.32	0. 37	
		У			0.30	0.35	0.40	
	Black	X	$\theta = 0$	-0°	0. 25	0.30	0. 35	
		у	$\sigma - \zeta$) –∪	0. 26	0.31	0.36	


Optimum contrast is obtained by adjusting the LCD driving voltage(Vop) while at the viewing angle of θ = ϕ = 0°.

6-1 Contrast ratio is defined as follows:


6-2. Definition of Vop

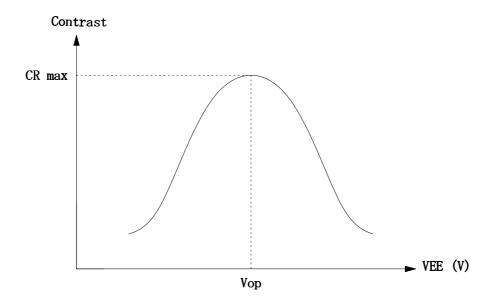


6-3. Definition of response time

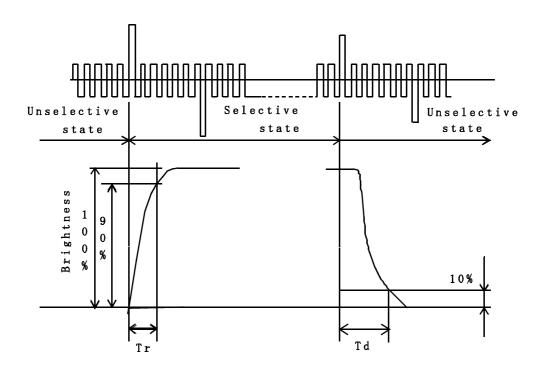

6-4. Definition of viewing angle

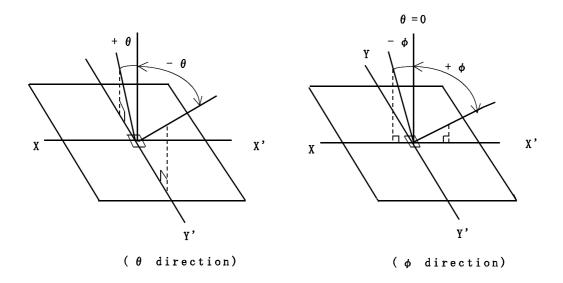


6-5. Measuring points

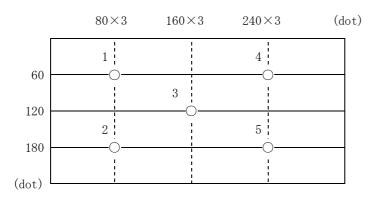


- 1) Rating is defined as the average brightness inside the viewing area.
- 2) 30 minutes after CFL is turned on. (Ambient Temp.= 25° C)
- 3) The inverter should meet the eccentric conditions; -Sine, symmetric waveform without spike in positive and negative.
- 4) Measuring Inverter: PH-BLC08-K3(HITACHI MEDIA ELECTRONICS)

7. Circuit Block Diagram

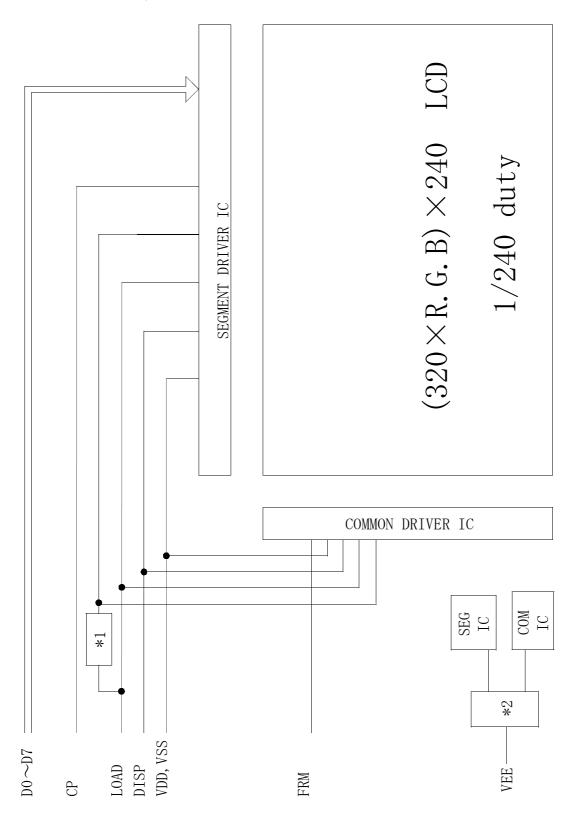

*1 Randomizing circuit
*2 Bias voltage circuit

7-1. Power supply

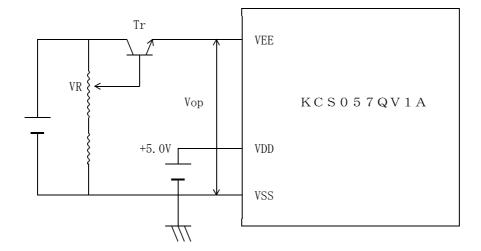

8. Interface signals

8-1. LCD

CN1 : 53261-1510 (Molex)

PIN NO.	SYMBOL	DESCRIPTION	LEVEL
1	FRM	Synchronous signal for driving scanning line	Н
2	LOAD	Data signal latch clock	$\mathbb{H} \to \Gamma$
3	CP	Data signal shift clock	$\mathbb{H} \to \Gamma$
4	DISP	Display control signal	H(ON), L(OFF)
5	VDD	Power supply for logic	_
6	VSS	GND	_
7	VEE	Power supply for LCD	_
8	D7		
9	D6		
10	D5		
11	D4	Display data	H(ON), L(OFF)
12	D3		
13	D2		
14	D1		
15	D0		

Recommended matching connector : 51021-1500 (Molex)


NOTE) This is assignment is the reverse of what Molex defined. Remember that for your designing.

8-2. CFL

PIN No	SYMBOL	DESCRIPTION	LEVEL
1	HV	Power supply for CFL	AC
2	NC		_
3	GND	Ground line(from inverter)	_


LCD side connector : BHR-03VS-1 (JST) Recommended matching connector : SM02-(8.0)B-BHS-1 (JST)

9. Interface Timing Chart

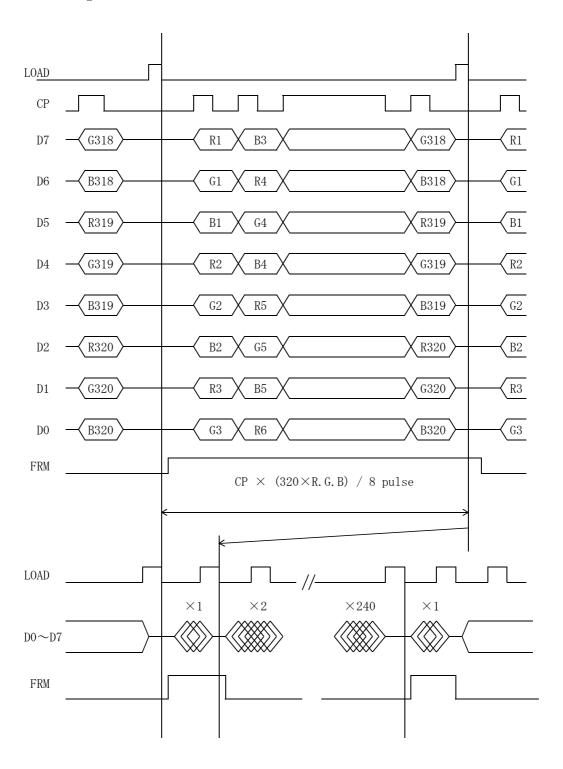


- * The cycle of load signal should be stable and continuously applied without interruption.
- * The above-mentioned timing chart shows a reference to set up a LCD module, not an electrical rating

10. Data and Screen

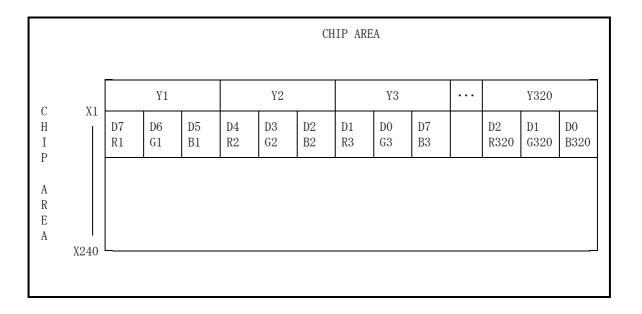

11. Input Timing Characteristics

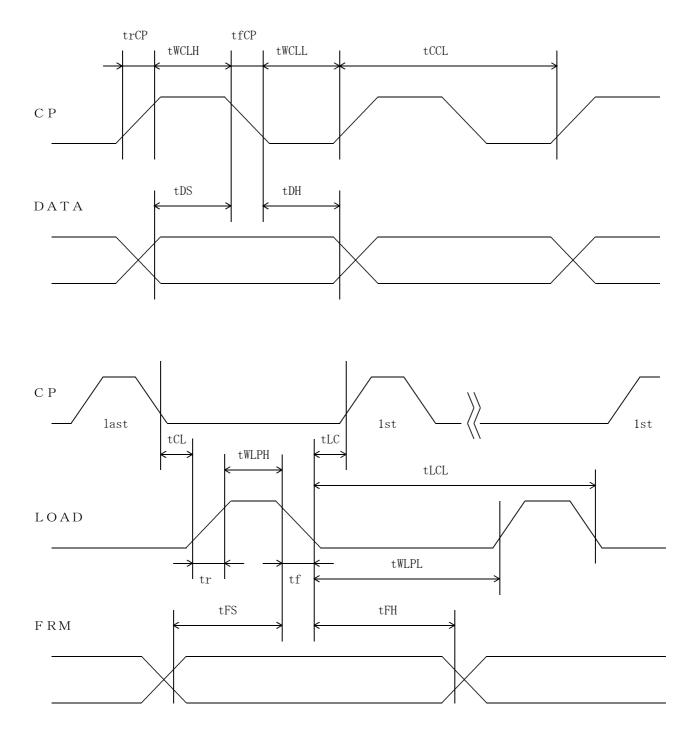

11-1. Switchig characteristics

Input Characteristics ; VDD = +5.0V \pm 5%, Temp. = 25 $^{\circ}$ C

ITEM	SYMBOL	MIN.	MAX.	UNIT
CP Cycle *1,*2	tCCL	62	_	ns
CP "H" Pulse Width *2	tWCLH	25	_	ns
CP "L" Pulse Width *2	tWCLL	25	_	ns
CP Rise Up Time *2	trCP	_	30	ns
CP Fall Down Time *2	tfCP	_	30	ns
Data Set Up Time	tDS	20	_	ns
Data Hold Time	tDH	15	_	ns
LOAD "H" Pulse Width	tWLPH	50	_	ns
LOAD "L" Pulse Width	tWLPL	370	_	ns
LOAD Cycle *3	tLCL	420	_	ns
CP→LOAD Delay Time	tCL	0	_	ns
LOAD→CP Delay Time *4	tLC	120-tWLPH	_	ns
Input Signal Rise Up Time	tr	_	30	ns
Input Signal Fall Down Time	tf	_	30	ns
FRM Data Set Up Time	tFS	100	_	ns
FRM Data Hold Time	tFH	30	_	ns

^{*1} CP Cycle is adjust so that FRM signal is 75Hz.

①
$$trCP + tfCP \le tCCL - (tWCLH + tWCLL)$$

② $trCP$, $tfCP \le 30$ ns

Please use on condition that ①,② are filled.


*4 tLC ≧ 0

^{*2} The formula of condition

^{*3} LOAD Cycle is const.

12. Supply Voltage Sequence Condition

 $\underline{\text{DO NOT}}$ apply DC voltage to the LCD panel. DC voltage induce irreversible electrochemical reactions and reduce LCD life. Always follow the power supply ON/OFF sequence of VDD first, input signal second, VEE third and finally DISP. This will prevent DC driving of the LCD or CMOS LSI latch up as shown below.

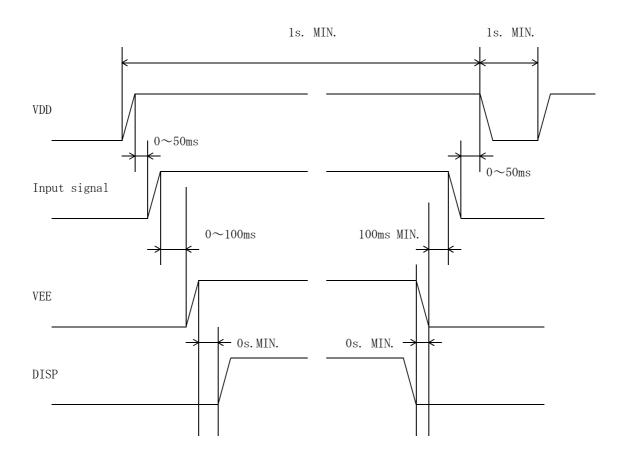

- * The above sequence should be designed as to keep each normal figure on condition that liquid crystal module is loaded on your system.
- * Control the input signal and VEE to the above ON OFF timing when you switch ON/OFF the display during VDD and DISP are on.

 And design the circuit as VEE's OFF level become GND level at the some time.

13. Backlight Characteristics

Temp. = 25℃


ITEM	SYMBOL	MIN.	TYP.	MAX.	NOTE
Starting discharge Voltage	VS		_	795 Vrms.	0 ℃
urscharge vortage *1	VS		_	530 Vrms.	25 ℃
Discharging tube current *2,*3	IL	2.0 mArms.	5.0 mArms.	6.0 mArms.	_
Discharging tube voltage	VL		320 Vrms.	_	_
Operating life *4 (IL=5.0 mArms.)	Т	25,000 h	40,000 h	_	_
Operating frequency	F	30 kHz	_	100 kHz	_

- *1 The Non-load output voltage (VS) of the inverter should be designed to have some margin, because VS may increase due to the leak current which may be caused by wiring of CFL cables. (Reference value: 1035 Vrms MIN.)
- *2 We recommend that you should set the discharging tube current at lower than typical value so as to prevent the heat accumulation of CFL tube from deteriorating a performance of the LCD.
- *3 Do not apply more than (6.0)mA discharge tube current. Because CFL maybe broken due to over current.
- *4 When the illuminance or quantity of light has decreased to 50 % of the initial value.

 Average life time of CFL will be decreased when LCD is operating at lower and Higher temperature.

14. Lot Number Identification

The lot number shall be indicated on the back of the backlight case of each LCD.



_						_
YEAR	2001	2002	2003	2004	2005	2006
CODE	1	2	3	4	5	6
MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.
CODE	1	2	3	4	5	6
MONTH	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.
CODE	7	8	9	X	Y	Z

15. Warranty

15-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

15-2. Production Warranty

Kyocera warrants its LCDs for a period of 12 months after receipt by the purchaser, and within the limits specified. Kyocera shall, by mutual agreement, replace or rework defective LCDs that are shown to be Kyocera's responsibility.

16. Precautions for use

16-1. Installation of the LCD

- 1. Please ground either of the mounting (screw) holes located at each corner of an LCD module, in order to stabilize brightness and display quality.
- 2. A transparent protection plate shall be added to protect the LCD and its polarizers.
- 3. The LCD shall be installed so that there is no pressure on the LSI chips.
- 4. The LCD shall be installed flat, without twisting or bending.
- 5. The display window size should be the same as the effective viewing area.
- 6. In case you use outside frame of effective viewing area as outward appearance of your product, unevenness of its outward appearance is out of guarantee.
- 7. Do not pull the CFL lead wires and do not bend the root of the wires. Housing should be designed to protect CFL lead wires from external stress.

16-2. Static Electricity

1. Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required. Operation should wear ground straps.

16-3. LCD Operation

- 1. The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2. Vop must be adjusted to optimize viewing angle and contrast.
- 3. Operation of the LCD at temperature below the limit specified may cause image degradation and/or bubbles.

It may also change the characteristics of the liquid crystal.

This phenomenon may not recover. The LCD shall be operated within the temperature limits speci-fied.

16-4. Storage

- 1. The LCD shall be stored within the temperature and humidity limits specified. Store in a dark area, and protected the LCD from direct sunlight or fluorescent light.
- 2. The LCD should be packaged to prevent damage.

16-5. Screen Surface

- 1. $\underline{\text{DO NOT}}$ store in a high humidity environment for extended periods. Image degradation, bubbles, and/or peeling off of polarizer may result.
- 2. The front polarizer is easily scratched or damaged.


Prevent touching it with any hard material, and from being pushed or rubbed.

- 3. The LCD screen may be cleaned with a soft cloth or cotton pad.
 - Methanol, or Isopropyl Alcohol may be used, but insure that all solvent residue is removed.
- 4. Water may cause damage or discoloration of the polarizer.
 - Clean any condensation or moisture from any source immediately.
- 5. Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizers.

17. Reliability Data / Environmental Test

TEST ITEM	TEST CONDITION	TEST TIME	RESULT
High Temp. Atmosphere	70℃	240 h	Display Quality : No defect Display Function : No defect Current Consumption : No defect
Low Temp. Atmosphere	-20℃	240 h	Low Temp. Bubble : None Solid Crystallization of Liquid Crystal : None Display Quality : No defect Display Function : No defect Current Consumption : No defect
High Temp. Humidity Atmosphere	40℃ 90%RH	240 h	Display Quality : No defect Display Function : No defect Peel-off of Organic Sealing : None Current Consumption : No defect
Temp. Cycle	-20°C 0.5 h R. T. 0.5 h 60°C 0.5 h	10 cycles	Display Quality : No defect Display Function : No defect Peel-off of Organic Sealing : None Bubble on Cell : None
High Temp. Operation	60℃ Vop	500 h	Display Quality : No defect Current Consumption : No defect

- * Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- st The LCD is tested in circumstances in which there is no condensation.
- * The tested LCD is inspected after 24 hours of storage at room temperature and room humidity after each test is finished.
- * The reliability test is not an out-going inspection.
- * The result of the reliability test are for your reference purpose only. The reliability test is conducted only to examine the LCD's capability.

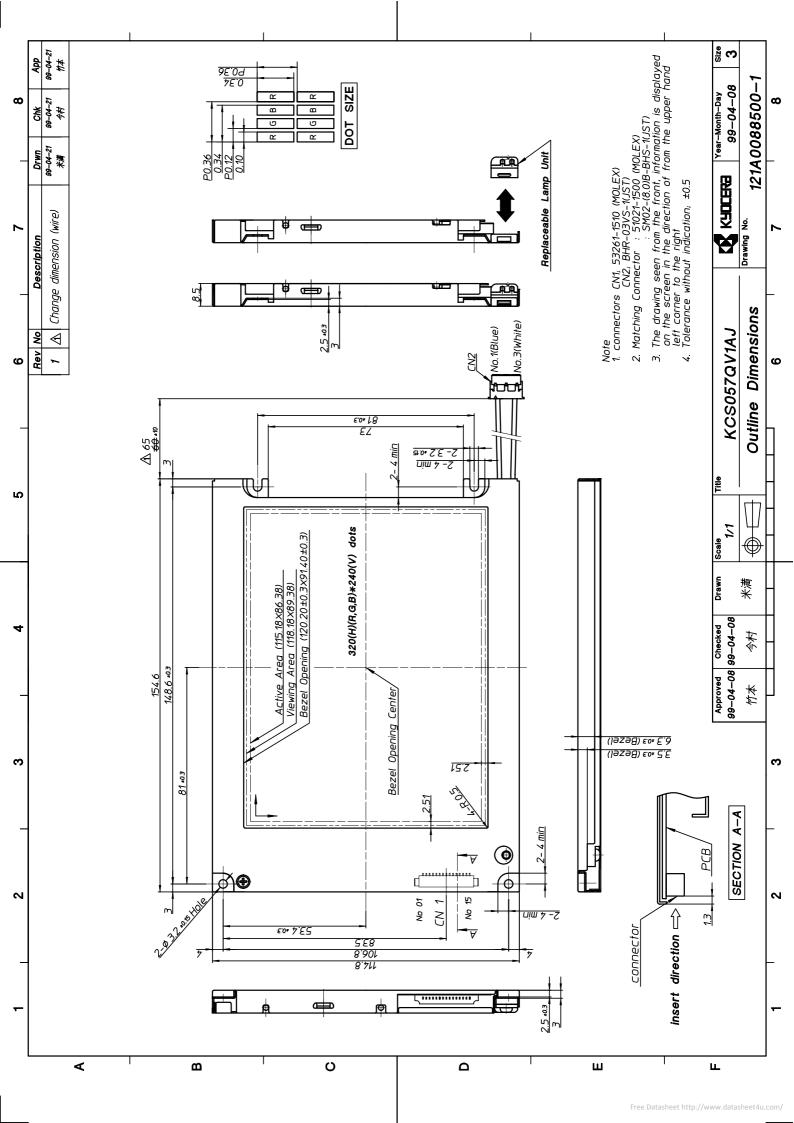

SPEC.NO.	TQ3C-8EACO-E2CWC16-00
DATE	August 10,2000

F	0 R	
ľ	OI	

KYOCERA INSPECTION STANDARD

TYPE: KCS057QV1AJ-G23

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

Original	Designed	by :Engineer	ing Dept.	Confirmed b	y :QA Dept.
Issue Data	Prepared	Checked	Approved	Checked	Approved
August 10,2000	y Yanazaki	4. Masumor	Metennew	Stogeshi	J. Y.shido

Revision Record

		Design	ed by:	Engineering D	ept.	Confirmed by:	QA Dept.
Date		Prepa	red	Checked	Approved	Checked	Approved
August 1	0,2000	If yemo	yaki	4. Matsumon	Materimi	S. Hayaahi	y yoshida
Rev. No.	Date		Page	1	Description	ns	
00	August	10,2000	_	Change SPEC N "TQ3C-8EAC	o. 0-E2AAWC154-00	" → "TQ3C-8EA	CO-E2CWC16-00"
	- · · · · · · · · · · · · · · · · · · ·						
							;
	1						
		1818			·		

Visuals specification

1)Note

Item		Note
General	inspected, operating volume	in this Inspection Standards are oltage(Vop) shall be set at the contrast is available.
	applied to any defect w	ed about the image quality shall be within the effective viewing area cable to outside of the area.
	standard happen, additi	ch are not specified in this conal standard shall be determined tween customer and Kyocera.
	4. Inspection conditions	
	Inspection distance : 3 Temperature : 2	500 Lux minimum . 300 mm (from the sample) $25 \pm 5 ^{\circ}\!\!\!\mathrm{C}$ right above
Definition of Inspection item	Pinhole, Bright spot Black spot, Scratch Foreign particle	The color of a small area is different from the remainder. The phenomenon dose not change with voltage.
	Contrast variation	The color of a small area is different from the remainder. The phenomenon changes with voltage.
	Polarizer (Scratch, Bubble, Dent)	Scratch, Bubble and Dent in the polarizer which can be observed in on / off state.

2)Standard

Inspection item		Judgement	standard	
Pinhole, Bright spot Black spot, Foreign particle	a			
	ľ		d = (a +	b) / 2
	Category	Size (mm)	Acceptab	le number
	A	$d \leq 0.2$	neg	lected
	В	$0.2 < d \le 0.3$		5
	C 0	$0.3 < d \leq 0.5$		3
	D 0	0.5 < d		0
Scratch, Foreign particle	Width A W ≦	(mm) Len ≦ 0.03	gth (mm)	Acceptable No.
	В	_ 0.00	L ≦ 2.0	neglected
	C 0.03< W	≤ 0.1 2.0 <	L ≦ 4.0	3
	D	4.0 <	C L	0
	E 0.1 < W	1		According to Circular
Contrast variation		Size (mm) $d \le 0.5$ $0.5 < d \le 0.7$ $0.7 < d$	neg	b) / 2 le number lected 3 0

Inspection item	Judgement standard				
Polarizer (Scratch, Bubble, Dent)	(1) Scratch	W			
	Width (mm)	Length (mm)	Acceptable No.		
	A W \leq 0.1	_	neglected		
		L ≦ 5.0	neglected		
	С	5.0 < L	0		
	D 0.3 < W	_	0		
	[-	!			
		a d = (a +	b) / 2		
		a d = (a +			
	Category Size	d = (a + (mm) Accepta	b) / 2		
	Category Size	$d = (a + \frac{1}{2})^{2}$ $d = $	b) / 2		
	Category Size A	$\begin{array}{c} a \\ d = (a + \\ \hline \\ (mm) \\ \leq 0.2 \\ \\ \leq 0.3 \\ \end{array}$	b) / 2 ble number glected		