SPEC. NO.	TQ3C-8EASO-E1AAAJ32-00			
DATE	February 4, 1998			

# SPEC

F	0	R	•							
---	---	---	---	--	--	--	--	--	--	--

TYPE: KS3224ASTT-FW-X2

#### CONTENTS

- 1. Application
- 2. Construction and Outline
- 3. Mechanical Specifications
- 4. Absolute Maximum Ratings
- 5. Electrical Characteristics
- 6. Optical Characteristics
- 7. Circuit Block Diagram
- 8. Interface Signals
- 9. Interface Timing Chart
- 10. Input Timing Characteristics
- 11. Supply Voltage Sequence Condition
- 12. backlight Characteristics
- 13. Lot Number Identification
- 14. Warranty
- 15. Precaution for Use
- 16. Reliability Data / Environmental Test
- 17. Outline Drawing

# **Issued**

Date: NOV. 12.2001



Hayato LCD Division

# TENTATIVE

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

Original	Designed by	:Engineerin	Confirmed by :QA Dept.		
Issue Data	Prepared	Checked	Approved	Checked	Approved
February 4,1998	S. Kojima	S. Matruo	a hishis	S:Hajoshi	y yoshida

# Revision Record

		Designed by	z :Engineerin	g Dept.	Confirmed b	oy :QA Dept.
Date	e 	Prepared	Checked	Approved	Checked	Approved
Rev. No.	Date	Page		Descrip	tions	
		:				
					33	

#### 1. Application

This data sheet defines the specification for a 320×240 dot ,Transmissive mode dot matrix type Liquid Crystal Display with CFL backlight.

#### 2. Construction and Outline

320×240 dots, COG type LCD with CFL backlight.

Backlight system : Side-edge type CFL.(1 tube.)

Inverter


: Option

Recommended Inverter: PH-BLCO8-K3 (HITACHI MEDIA ELECTRONICS)

Polarizer

: Glare treatment.

Additional circuit : Bias voltage circuit, Randomizing circuit.

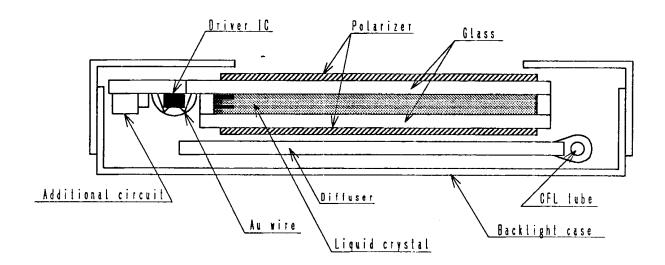

#### 3.Mechanical Specifications

ITEM	SPECIFICATION	UNIT
Outline dimensions	154.6(W) × 114.8(H) × 8.5(D)	nn
Effective viewing area	118.18(W) × 89.38(H)	in in
Dot number	320 (W) × 240 (H)	Dots
Dot size	0.34 (W) × 0.34 (H)	mm
Dot pitch	0.36 (W) × 0.36 (H)	nn.
Display color *1	White *2	_
Base color *1	Black *2	_
Weight	200	g

<sup>\*1</sup> Due to the characteristics of the LC material, the color vary with environmental temperature.

Display data "H" :R,G,B Dots ON : White Display data "L" :R,G,B Dots OFF : Black

#### 4. Absolute Maximum Ratings

# 4-1 Electrical absolute maximum ratings

Temp. = 25 ℃

ITEM	SYMBOL	MIN.	MAX.	UNIT
Supply voltage for logic	VDD	0	7.0	V
Supply voltage for LCD driving	VEE	0	44.0	V
Input voltage	Vin	0	VDD	V

<sup>\*2</sup> Negative-type display

#### 4-2. Environmental absolute maximum ratings

ITEM	SYMBOL	MIN	MAX	UNIT
Operating temperature	Тор	0	50	°C
Storage temperature *1	Тято	-20	60	°C
Operating humidity *2	Нор	10	*3	% RH
Storage humidity *2	Нато	10	*3	% RH
Vibration	_	*4	*4	_
Shock	_	<b>*</b> 5	*5	

- \*1 Temp. = -20% < 48Hr. , Temp = 60% < 168Hr. No vibration and shock.
- \*2 Non-condensation.
- \*3 Temp.  $\leq$  40°C, 85% RH Max. Temp. > 40°C, Absolute Humidity shall be less than 85% RH at 40°C.

-	Frequency	10~55 Hz
	Vibration width	0.15

Converted to acceleration value:  $(0.03\sim0.91G)$   $10-55-10 \text{ Hz} \quad 1 \text{ minute}$ 

2 hours in each direction  $\,$  X/Y/Z (6 hours as total) EIAJ ED-2531

\*5 Acceleration: 50 G

Interval

Pulse width: 11 msec

3 times in each direction :  $\pm X/\pm Y/\pm Z$ .


EIAJ ED-2531

#### 5. Electrical Characteristics

Temp. = 25°C, VDD = 5V  $\pm$  5%

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply voltage for logic	VDD	_	4.75	5.00	5.25	V
LCD driving voltage *1	Vop=	0 °C	24.3	25.3	26. 3	V
	VEE	25 ℃	24.0	25.0	26. 0	v
		40 ℃	23.6	24.6	25.6	v
Input signal voltage	Vin	"H" level	0. 8VDD	_	VDD	v
		"L" level	0		0. 2VDD	v
Clock frequency	f cp		1.34	1.44	10.0	MHz
Frame frequency *2	f FRM		70	75	80	Hz
Current consumption for logic	IDD			2. 0	3.0	■A
Current consumption for LCD driving	IEE	*3		6. 2	9.3	■A
Power consumption	Pdisp			165	258	≡₩

- \*1 Maximum contrast ratio is obtained by adjusting the LCD driving voltage ( Vop = VEE ) for driving LCD.
- \*2 In consideration of display quality, it is recommended that frame frequency is set in the range of 70-80Hz. When you have to use higher frame and clock frequencies, confirm the LCD's performance and quality prior to finalizing the frequency values: Generally, as frame and clock frequencies become higher, current consumption will get bigger and display quality will be degraded.
- \*3 Display high frequency pattern, ( see below ). VDD = 5V , Vop = VEE ,  $f_{FRM} = 75$  Hz , fcp = 1.44 MHz

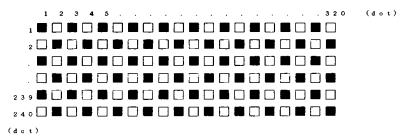

#### 6. Optical Characteristics


Temp. =  $25^{\circ}$ C Measuring spot =  $\phi$  12 mm

ITEM SY		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Response	Rise	Tr			_	210	310	∎s
time	Down	Td			_	130	230	<b>N</b> S
Viewing ang	Viewing angle range		0.000	$\phi = 0^{\circ}$	-30	_	20	deg.
		φ	CR≧2	θ =0°	-30	_	30	deg.
Contrast ratio CR		$\theta = \phi$	=0°	5. 0	8. 0	_	_	


Optimum contrast is obtained by adjusting the LCD driving voltage (Vop) while at the viewing angle of  $\theta$  =  $\phi$  = 0°.

### 6-1. Contrast ratio is defined as follows:


# 6-2. Definition of viewing angle

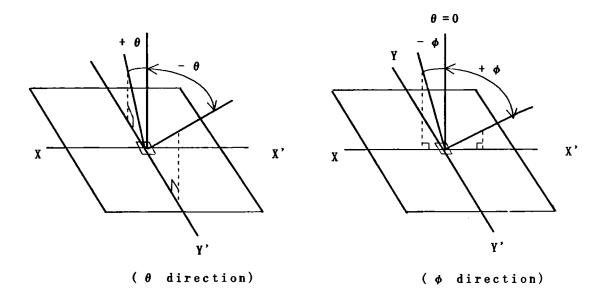


#### 6-3. Definition of response time

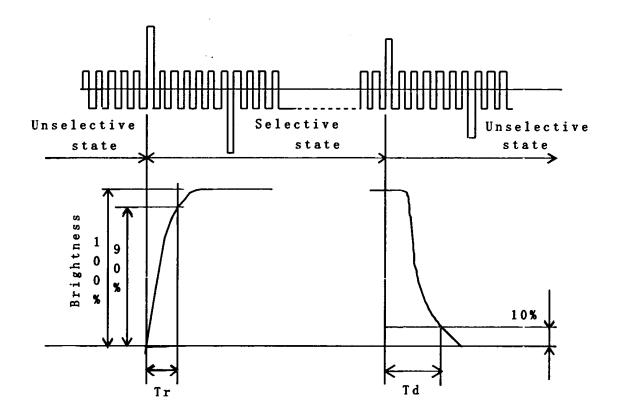


# 6-4. Definition of Vop

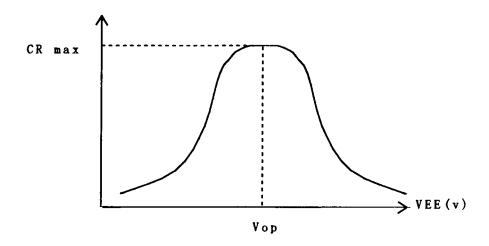

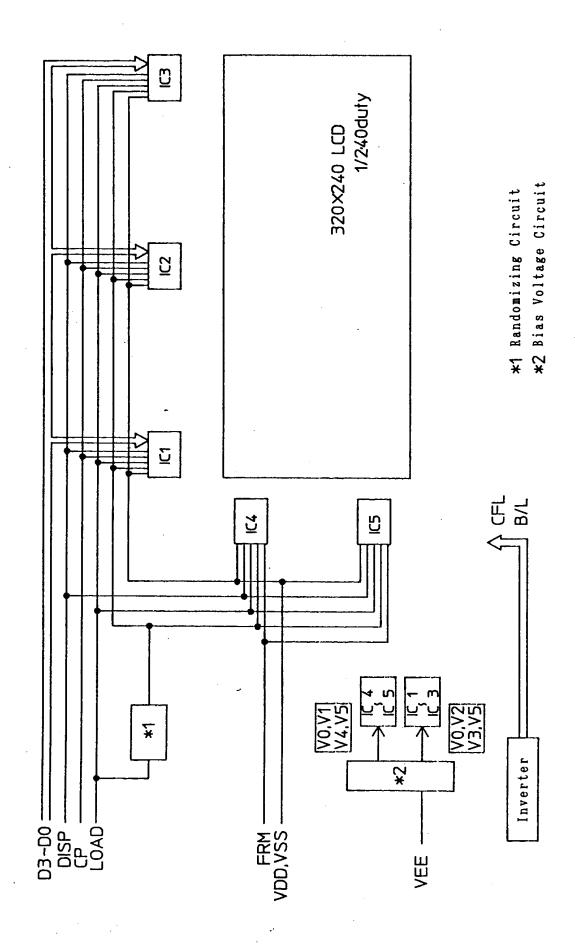

# 7-1. Power supply

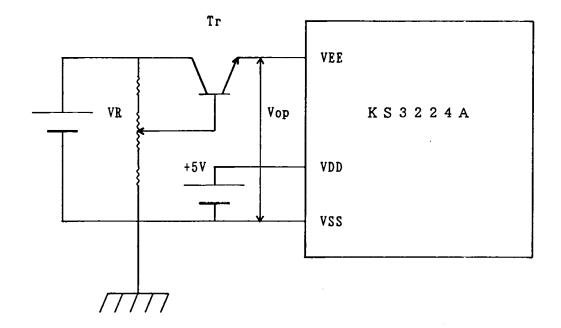

# 8. Interface Signals

8-1. LCD

CN1:53261-1510 (Molex)

PIN NO.	SYMBOL	DESCRIPTION	LEVEL
1	FRM	Synchronous signal for driving scanning line	Н
2	LOAD	Data signal latch clock	H → L
3	CP	Data signal shift clock	H → L
4	DISP	Display control signal	H(ON), L(OFF)
5	VDD	Power supply for logic	_
6	VSS	GND	_
7	VEE	Power supply for LCD	_
8	NC	No Connect	_
9	NC		
10	NC		
11	NC		
12	D3	4 bit parallel data	H(ON),L(OFF)
13	D2		
14	D1		
15	DO		

Recommended matching connector:51021-1500 (Molex)


NOTE) This pin assignment is the reverse of what Molex defined. Remember that for your designing.

# 8-2. CFL


PIN NO.	SYMBOL	DESCRIPTION	LEVEL
1	ну	Power supply for CFL	AC
2	NC	No Connect	
3	GND	Ground line (from inverter)	_

LCD side connector : BHR-03VS-1 (JST)

Recommended matching connector: SM02-(8.0)B-BHS-1 (JST)

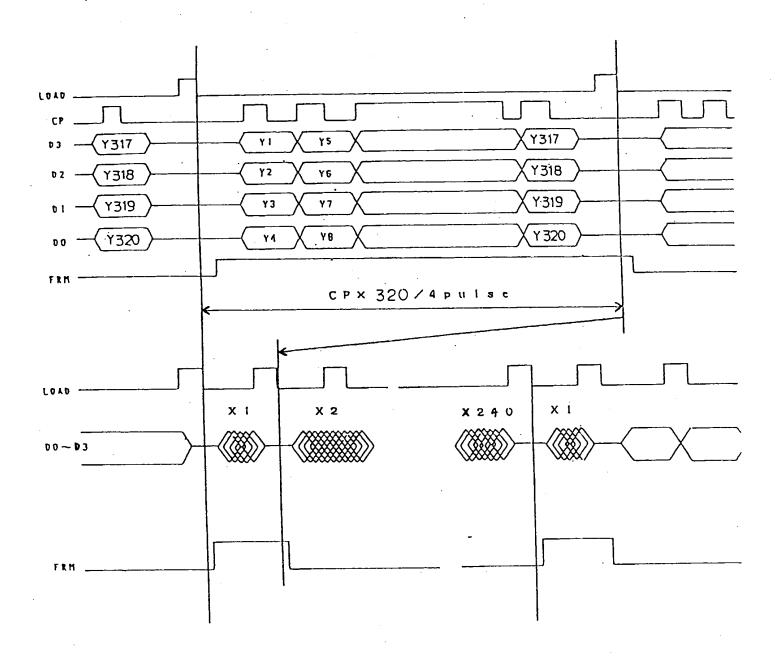

# 10. 入力タイミング特性

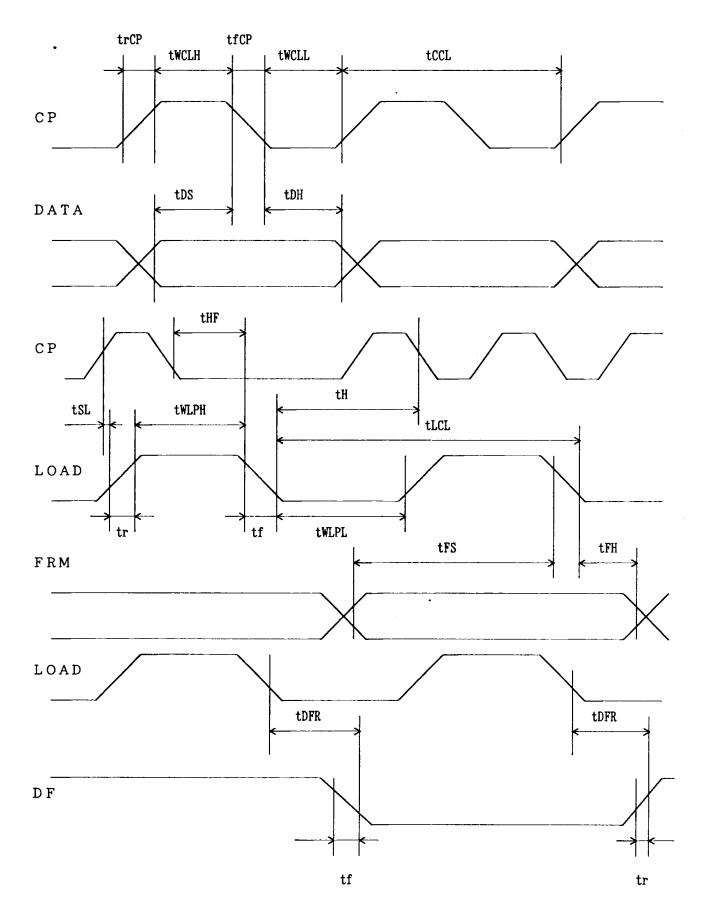

# 10-1. Switching characteristics

Input characteristics ; VDD =  $+5V \pm 5\%$  Temp.=25°C

ITEM	SYMBOL	MIN.	MAX.	UNIT
CP Cycle *1	tCCL	82	_	ns
CP "H" Pulse Width	tWCLH	28	_	ns
CP "L" Pulse Width	tWCLL	28	_	ns
CP Rise up Time	trCP	_	50	ns
CP Fall Down Time	tfCP	_	50	ns
Data Set up time	tDS	28	_	ns
Data Hold Time	tDH	20	_	ns
Load "H" Pulse Width	tWLPH	30	_	ns
Load "L" Pulse Width	t₩LPL	370	_	ns
Load Cycle	tLCL	400	_	ns
Data Strobe Set up Time	tSU	30		ns
Data Strobe Hold Time	tH	200	_	ns
Input Signal Rise up Time	tr *2	_	30	ns
Input Signal Fall down Time	tf *2		30	ns
FRM Data Set up Time	tFS	100	_	ns
FRM Data Hold Time	tFH	30	-	ns


<sup>\*1</sup> CP cycle is adjust so that FRM signal is 75Hz.

① trCP, tfCP < {tCCL-(tWCLH+tWCLL)} /2 Please use on condition that ① is filled.

<sup>\*2</sup> The formura of condition

# 1 1. Supply Voltage Sequence Condition

<u>DO NOT</u> apply DC voltage to the LCD panel. DC voltage induce irreversible electrochemical reactions and reduce LCD life. Always follow the power supply ON/OFF sequence of VDD first interface second and finally VEE. This will prevent DC driving of the LCD or CMOS LSI latch-up as shown below.

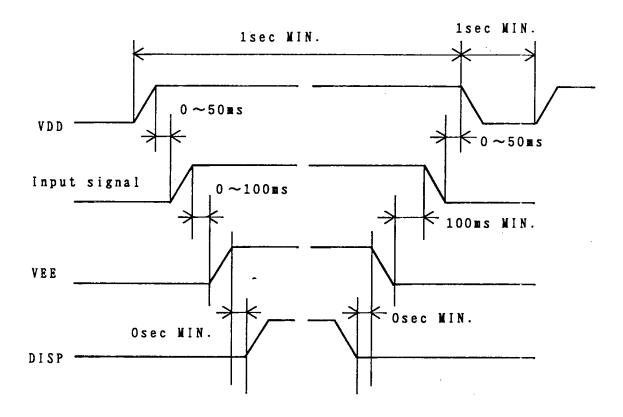

\* Control the supply voltage sequence not to float all signal line when the LCD panel is driving.

#### 12 . Backlight Characteristics

#### 12-1 CFL ratings

Inverter: PH-BLC08-K3 (HITACHI MEDIA ELECTRONICS)

Temp. = 25℃

ITEM	SYMBOL	MIN.	TYP.	MAX.	NOTE
Starting	N.G.	_	_	770 Vrms.	0 ℃
discharge Voltage *1	vs -	_	_	510 Vrms.	25 ℃
Discharging tube current	IL	2.0 mArms.	4.0 mArms.	6.0 mArms.	_
Discharging tube voltage	VL	_	315 Vrms.	_	_
Operating life *2 (IL=4.0mArms.)	T	_	25000Hr.	_	_
Operating frequency	F	30 kHz	_	100 kHz	_


- \*1 The Non-load output voltage (VS) of the inverter should be designed to have some margen, because VS may increace due to the leak current which may be caused by wiring of CFL cables. (Reference value: 1000 Vrms. MIN.)
- \*2 When the illuminance or quantity of light has decreased to 50 % of the initial value.

12-2. Surface Brightness of LCD ( IL = 4.0 mArms.)

Temp. =25℃

ITEM	MIN.	TYP.	MAX.	UNIT
Brightness	150	200	_	cd/m²


(Measuring points)

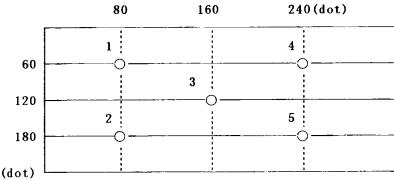

- 1) Rating is defined as the average brightness inside the viewing area.
- 2) 30 minutes after CFL is turned on (Ambient Temp. = 25%)
- 3) The inverter should meet the eccentric conditions;
  -Sine, symmetric waveform without spike in positive and negative.

#### 13. Lot Number Identification

The lot number shall be indicated on the back of the backlight case of each LCD.



YEAR	1997	1998	1999	2000
CODE	7	8	9	0

MONTH	JAN.	FEB.	MAR.	APR.	MAY.	JUN.
CODE	1	2	3	4	5	6

MONTH	JUL.	AUG.	SEP.	ост.	NOV.	DEC.
CODE	7	8	9	х	Y	Z

#### 14. Warranty

# 14-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

#### 14-2. Production Warrnaty

Kyocera warrants its LCDs for a period of 12 months after receipt by the purchaser, and within the limits specified. Kyocera shall, by mutual agreement, replace or rework defective LCDs that are shown to be Kyocera's responsibility.

#### 15. Precautions for use

#### 15-1. Installation of the LCD

- 1.Please ground either of the mounting(screw) holes located at each corner of an LCD module, in order to stabilize brightness and display quality.
- 2.A tranceparent protection plate shall be added to protect the LCD and its polarizers.
- 3. The LCD shall be installed so that there is no pressure on the LSI chips.
- 4. The LCD shall be installed flat, without twisting or bending.
- 5. The display window size should be the same as the effective viewing area.
- 6. In case you use outside frame of effective viewing area as outward appearance of your product, uneveness of its outward appearance is out of guarantee.

#### 15-2. Static Electricity

1. Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required. Operation should wear ground straps.

#### 15-3.LCD Operation

- 1. The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2. Vop must be adjusted to optimize viewing angle and contrast.
- 3. Operation of the LCD at temperature below the limit specified may cause image degradation and/or bubbles. It may also change the characteristics of the liquid crystal. This phenomenon may not recover. The LCD shall be operated within the temperature limits specified.

#### 15-4.Storage

- 1. The LCD shall be stored within the temperature and humidity limits specified. Store in a dark area, and protected the LCD from direct sunlight or fluorescent light.
- 2. The LCD should be packaged to prevent damage.

#### 15-5. Screen Surface


- 1.<u>DO NOT</u> store in a high humidity environment for extended periods. Image degradation, bubbles, and/or peeling off of polarizers may result.
- 2. The front polarizer is easily scratched or damaged. Prevent touching it with any hard mateial, and from being pushed or rubbed.
- 3. The LCD screen may be cleaned with a soft cloth or cotton pad. Methanol, or Isopropyl Alcohol may be used, but insure that all solvent residue is removed.
- 4. Water may cause damage or discoloration of the polarizer. Clean any condensation or moisture from any source immediately.
- 5. Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizers.

- 17 -

#### 16. Reliability Data / Environmental Test

TEST ITEM	TEST CONDITION	TEST TIME	RESULT
High Temp. Atmosphere	70℃	240hr.	Display Quality: No defect Display Function: No defect Current Consumption: No defect
Low Temp. Atmosphere	-20°C	240hr.	Low Temp.Bubble : None Solid Crystalization of Liquid Crystal : None Display Quality : No defect Display Function : No defect Current Consumption: No defect
High Temp. Humidity Atmosphere	40°C 90% RH	240hr.	Display Quality: No defect Display Function: No defect Peel-off of Organic Sealing: None Current Consumption: No defect
Temp.Cycle	-20°C 0.5hr. R.T. 0.5hr. 70°C 0.5hr.	10cycles	Display Quality : No defect Display Function : No defect Peel-off of Organic Sealing : None Bubble on Cell : None
High Temp. Operation	50°C Vop	500hr.	Display Quality : No defect Current Consumption: No defect

- \* Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- \* The LCD is tested in circumstances in which there is no condensation.
- \* The tested LCD is inspected after 24 hours of storage at room temperature and room humidity after each test is finished.
- \* The reliability test is not an out-going inspection.
- \* The results of the reliability test are for your reference purpose only. The reliability test is conducted only to examine the LCD's capability.

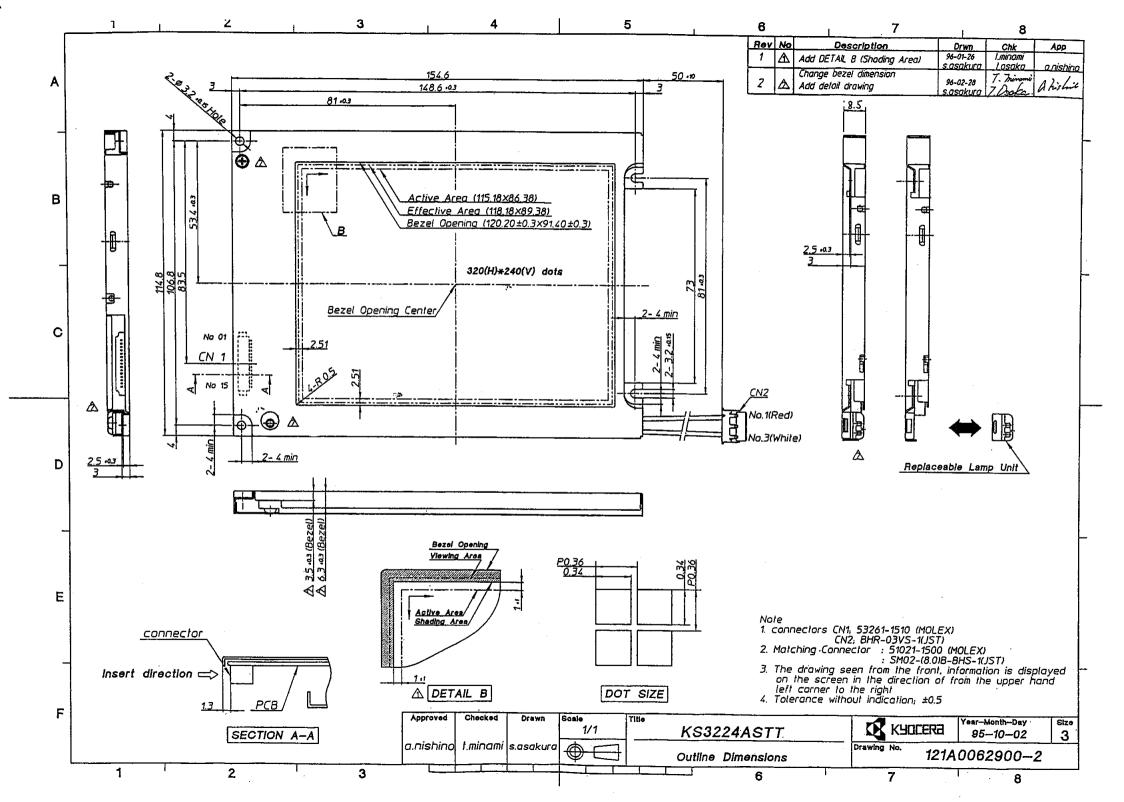

Document. No.	TQ3C-8EASO-E2
DATE	February 4, 1998

FOR	•	

# KYOCERA INSPECTION STANDARD

TYPE: KS3224ASTT-FW-X2

(LIQUID CRYSTAL DISPLAY MODULE)

Issued

Date: NOV. 12.2001



Hayato LCD Division

# TENTATIVE

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION HAYATO PLANT

Original	Designed by : Engineering Dept.			Confirmed by : QA Dept	
Issue Date	Prepared	Checked	Approved	Checked	Approved
February 4, 1998	S. Kiji ma	S. Matrus	Whisho	S. Hayash	J. Joshida

# Revision Record

— - <del>-</del>		Designed by	:Engineeri	ng Dept.	Confirmed b	y :QA Dept
Date		Prepared	Checked	Approved	Checked	Approved
Rev. No.	Date	Page		Descrip	tions	
					·	

# Visuals specification

# 1)Note

Item		Note				
General	inspected, operating v level where optimized	ed in this Inspection Standards are coltage(Vop) shall be set at the contrast is available.  uplied up to effective viewing area.				
	applied to any defect	ard about the image quality shall be within the effective viewing area icable to outside of the area.				
	standard happen, addit	ich are not specified in this ional standard shall be determined etween customer and Kyocera.				
	4.Inspection conditions					
	Inspection distance : Temperature :	500 Lux minimum 300 mm (from the sample) 25 ± 5 °C right above				
Definition of Inspection item	Pinhole, Bright spot Black spot, Scratch Foreign particle	The color of a small area is different from the remainder. The phenomenon dose not change with voltage.				
		· .				
	Contrast variation	The color of a small area is different from the remainder. The phenomenon changes with voltage.				
	Polarizer ( Scratch, Bubble, Dent )	Scratch, Bubble and Dent in the polarizer which can be observed in on / off state.				

# 2)Standard


Inspection item	Judgement standard					
Pinhole, Bright spot Black spot, Foreign particle	d = (a + b) / 2					
	Category Size (nm)		Acceptable number			
	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	<del></del>	neglected 5			
	C 0.3 < d ≦	<del></del>	3			
	D 0.5 < d	0.0	0			
Scratch, Foreign particle						
	N .					
		L				
		L				
	Width (mm)	Length (mm)	Acceptable No.			
	A W ≦ 0.03		Acceptable No.			
	A ₩ ≦ 0.03	 L ≤ 2.0	neglected neglected			
	A W ≦ 0.03	 L ≤ 2.0	neglected			
	A W ≤ 0.03  B C 0.03 < W ≤ 0.1 2.0  D 4.0	 L ≤ 2.0	neglected neglected 3			
	A W ≤ 0.03 B C 0.03 W ≤ 0.1 2.0	$\begin{array}{c} - \\ L \leq 2.0 \\ 0 < L \leq 4.0 \end{array}$	neglected neglected 3			
Contract variation	A W ≤ 0.03  B C 0.03 < W ≤ 0.1 2.0  D 4.0	$\begin{array}{c} - \\ L \leq 2.0 \\ 0 < L \leq 4.0 \end{array}$	neglected neglected 3 0 According to Circular			
Contrast variation	A W ≤ 0.03  B C 0.03 < W ≤ 0.1 2.0  D 4.0	$\begin{array}{c} - \\ L \leq 2.0 \\ 0 < L \leq 4.0 \end{array}$	neglected neglected 3 0 According to			
Contrast variation	A W ≤ 0.03  B C 0.03 < W ≤ 0.1 2.0  D 4.0	L ≦ 2.0 0 < L ≦ 4.0 0 < L	neglected neglected 3 0 According to Circular			
Contrast variation	A	$\begin{array}{c} - \\ L \leq 2.0 \\ 0 < L \leq 4.0 \end{array}$	neglected neglected 3 0 According to Circular			
Contrast variation	A	L ≦ 2.0 0 < L ≦ 4.0 0 < L - d = (a + Acceptab	neglected neglected 3 0 According to Circular			
Contrast variation	A	L ≦ 2.0 0 < L ≦ 4.0 0 < L - d = (a + Acceptab	neglected neglected 3 0 According to Circular b)/2 le number lected			
Contrast variation	A	L ≤ 2.0 0 < L ≤ 4.0 0 < L - d = (a + Acceptab 0.5 neg	neglected neglected 3 0 According to Circular			

# Inspection item

# Judgement standard


Polarizer ( Scratch, Bubble, Dent )

(1) Scratch



	Width (mm)	Length (mm)	Acceptable No.
A	W ≤ 0.1	<del>-</del>	neglected
В		. L ≦ 5.0	neglected
C	0.1 < ₩ ≦0.3	5.0 < L	0
D	0.3 < W	· <del></del>	0

(2)Bubble ( dent )



d = (a + b) / 2

Category	Size (mm)	Acceptable number
A	d ≦ 0.2	neglected
В	0.2 < d <b>≤</b> 0.3	5
С	$0.3 < d \leq 0.5$	3
D	0.5 < d	0